

DISPLAY Elektronik GmbH

DATA SHEET

LCD MODULE

DEM 20486 SBH-PW-N

Product specification

Version : 6

27/Apr/2006

GENERAL SPECIFICATION

MODULE NO. :

DEM 20486 SBH-PW-N

CUSTOMER P/N

VERSION NO.	CHANGE DESCRIPTION	DATE
0	ORIGINAL VERSION	17/12/2002
1	ADDING VERSION	25/07/2003
2	ADDING VERSION	04/11/2003
3	CHANGE EXTERNAL DIMENSIONS	14/11/2003
4	ADD VERSION	14/06/2005
5	MODIFY PCB DESCRIPTION	19/06/2006
6	MODIFY SECTION 6.1	27/04/2007

PREPARED BY: WJN

DATE: 27.04.2007

APPROVED BY: MH

DATE: 21.05.2007

CONTENTS

1. FUNCTIONS & FEATURES -----	2
2. MECHANICAL SPECIFICATIONS -----	2
3. BLOCK DIAGRAM -----	3
4. EXTERNAL DIMENSIONS -----	3
5. PIN ASSIGNMENT -----	4
6.1 PCB DRAWING AND DESCRIPTION -----	4
6.2 EXAMPLE APPLICATION -----	5
6.3 THE MODULE NO. IS PRINTED ON THE PCB -----	6
7. BACKLIGHT VOLTAGE AND CURRENT -----	6
8. DISPLAY DATA RAM (DDRAM) -----	7
9. MAXIMUM ABSOLUTE LIMIT -----	7
10. ELECTRICAL CHARACTERISTICS -----	8
11. CONTROL AND DISPLAY COMMAND -----	11
12. STANDARD CHARACTER PATTERN -----	12
13. LCM INITIALIZING BY INSTRUCTION -----	13
14. LCD MODULES HANDLING PRECAUTIONS -----	15
15. OTHERS -----	15

1.FUNCTIONS & FEATURES


MODULE	LCD TYPE
DEM 20486 SBH-PW-N	STN Blue Transmissive Negative Mode

- Viewing Direction : 6 o'clock
- Driving Scheme : 1/16 Duty Cycle, 1/5 Bias
- Power Supply Voltage : 5.0 Volt (typ.)
- Backlight Color : LED, White, Lightguide
- VLCD Adjustable For Best Contrast : 4.5 Volt (typ.)
- Display contents : 20 x 4 Characters (5x8 dots, Format: 208 Kinds)
- Internal Memory : CGROM (10,080 bits)
: CGRAM (64 x 8 bits)
: DDRAM (80 x 8 bits for Digits)
- Interface : Easy Interface with a 4-bit or 8-bit MPU


2. MECHANICAL SPECIFICATIONS

- Module Size : 98,00 x 60,00 x 14.5 mm (max.)
- Character Pitch : 4.10 x 7.00 mm
- Character Size : 3.45 x 6.35 mm
- Character Font : 5 x 8 dots
- Dot Size : 0.65 x 0.75 mm
- Dot Gap : 0.05 mm

3. BLOCK DIAGRAM

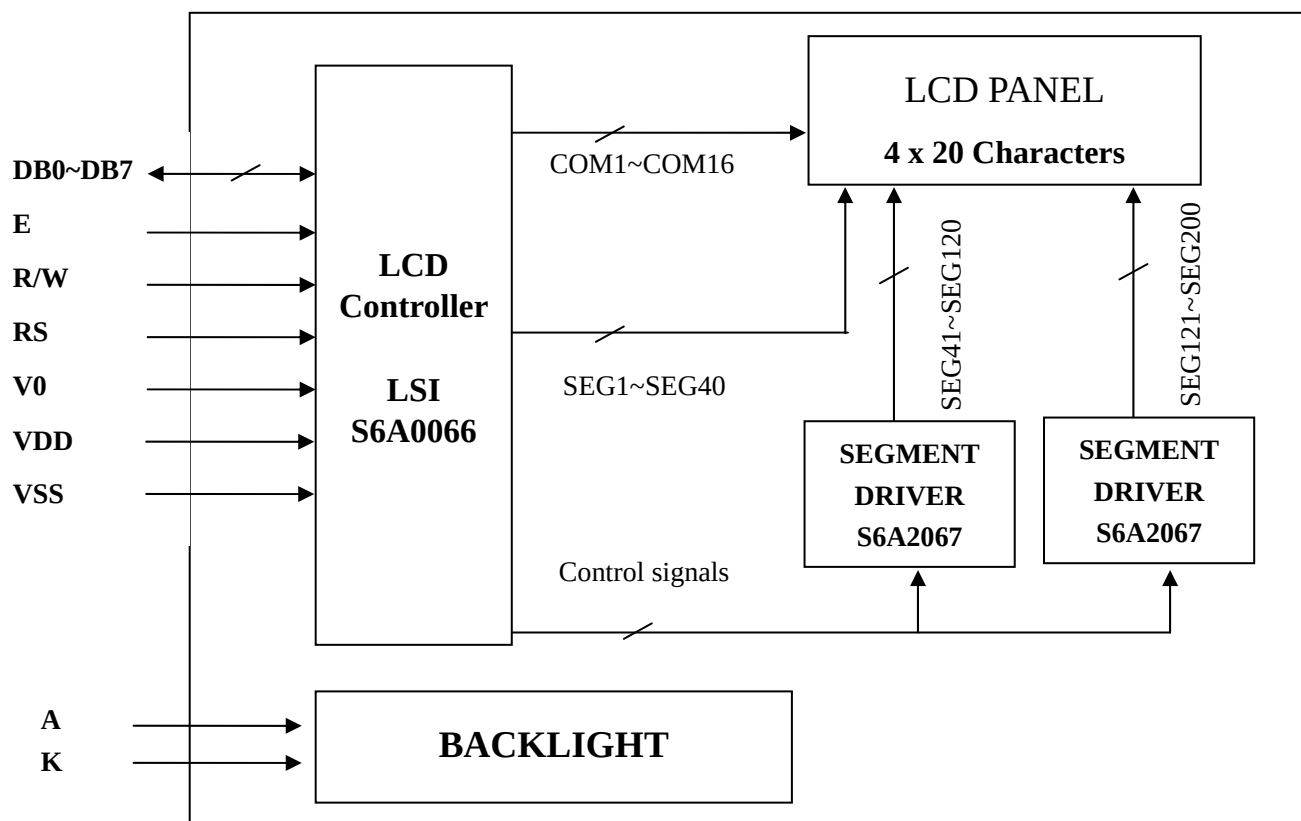


4. EXTERNAL DIMENSIONS

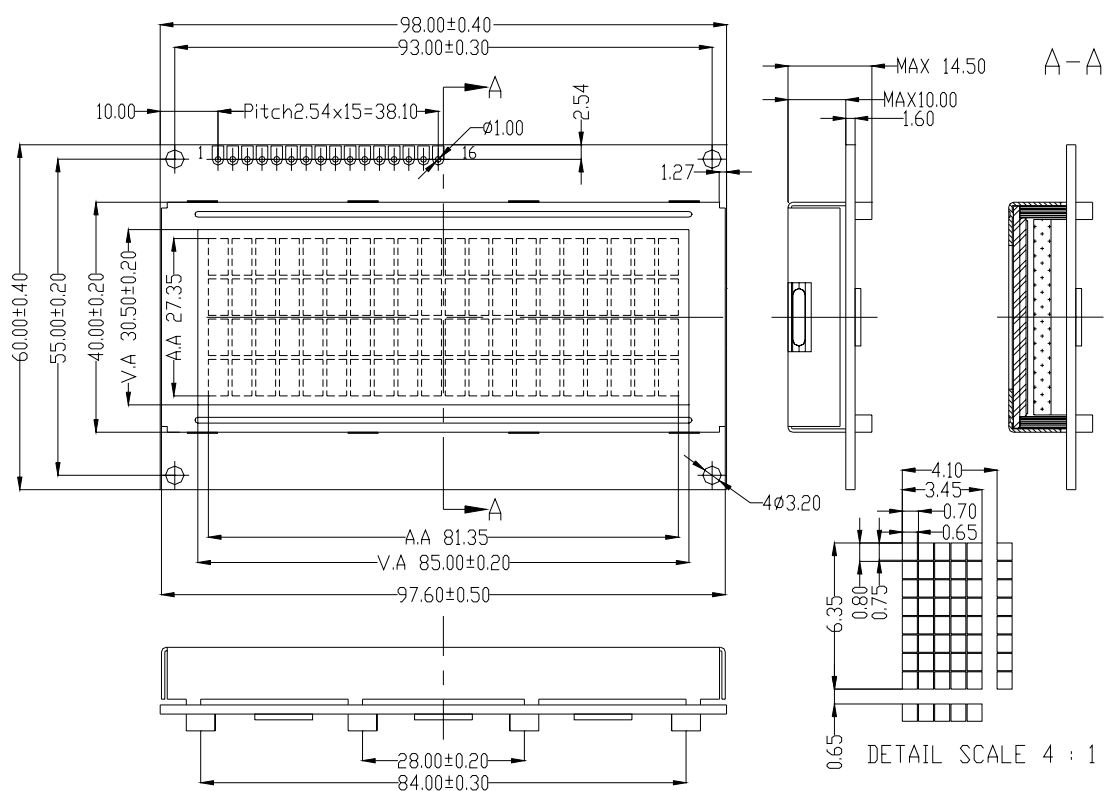

5. PIN ASSIGNMENT

Pin No.	Symbol	Function
1	VSS	Ground terminal of module
2	VDD	Power supply of module +5 Volt
3	V0	Power Supply for LCD
4	RS	Register Select RS=0 (Instruction Register) RS=1 (Data Register)
5	R/W	Read or Write R/W=1 (Read) R/W=0 (Write)
6	E	Enable
7	DB0	Bi-directional Data Bus, Data Transfer is performed Once, thru DB0~DB7, in the case of interface data. Length is 8-bits; and twice, thru DB4~DB7 in the case of interface data length is 4-bits. Upper four bits first then lower four bits.
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	
13	DB6	
14	DB7	
15	LED-(K)	Place also refer to 6.1 PCB Drawing and description
16	LED-(A)	Place also refer to 6.1 PCB Drawing and description

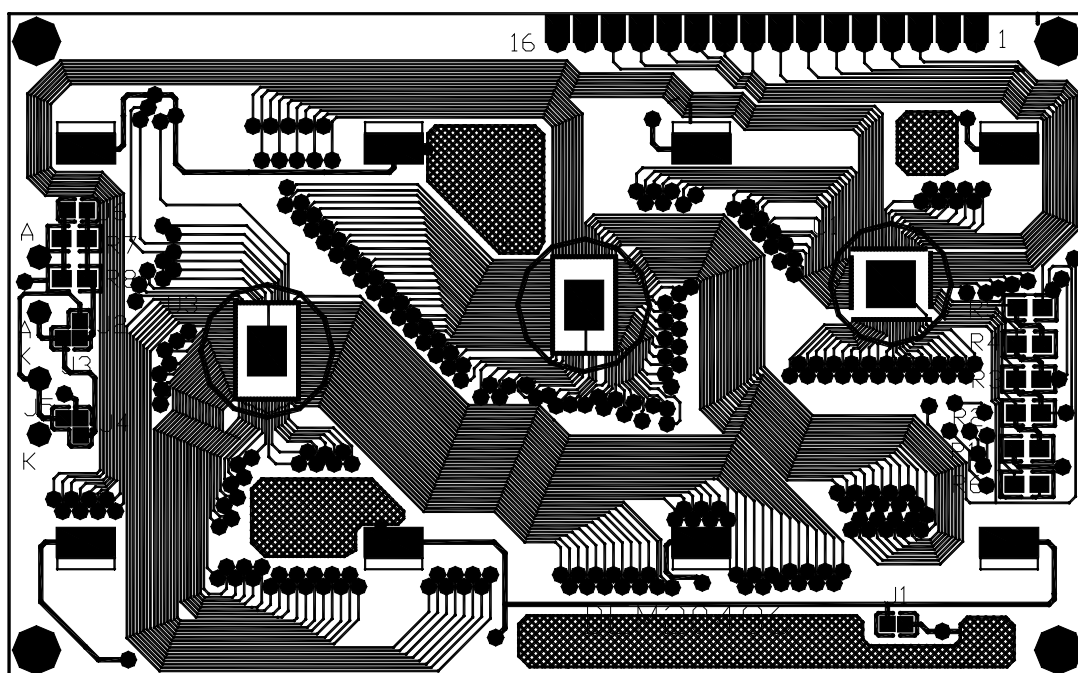6.1 PCB DRAWING AND DESCRIPTION

DESCRIPTION:

6-1-1.The polarity of the pin 15 and the pin 16

LED Polarity(1)	
15 Pin	16Pin
Anode	Cathode
J3=J5=open J2=J4=closed	

LED Polarity(2)	
15 Pin	16 Pin
Cathode	Anode
J3=J5= closed J2=J4= open	

Note: In application module, J2=J4= open and J3=J5=closed

6-1-2. The metal-bezel is set be on ground when the J1 is closed.

Note: In application module, J1=closed

6-1-3.The LED resistor can be bridged when the J6 is closed.


Note: In application module, J6=open

6-1-4.The R7 and the R8 are the LED resistor.

Note: In application module, R7=12 Ohm, R8=open.

6.2 Example application

6-2-1. The LED resistor should be bridged as following.



6-2-2. The 15 pin is the anode and the 16 pin is the cathode as following.




6-2-3.The 15 pin is the cathode and the 16 pin is the anode as following.



6-2-4. The metal-bezel is on ground as following.




6.3 The Module number DEM 20486 is printed on the PCB.

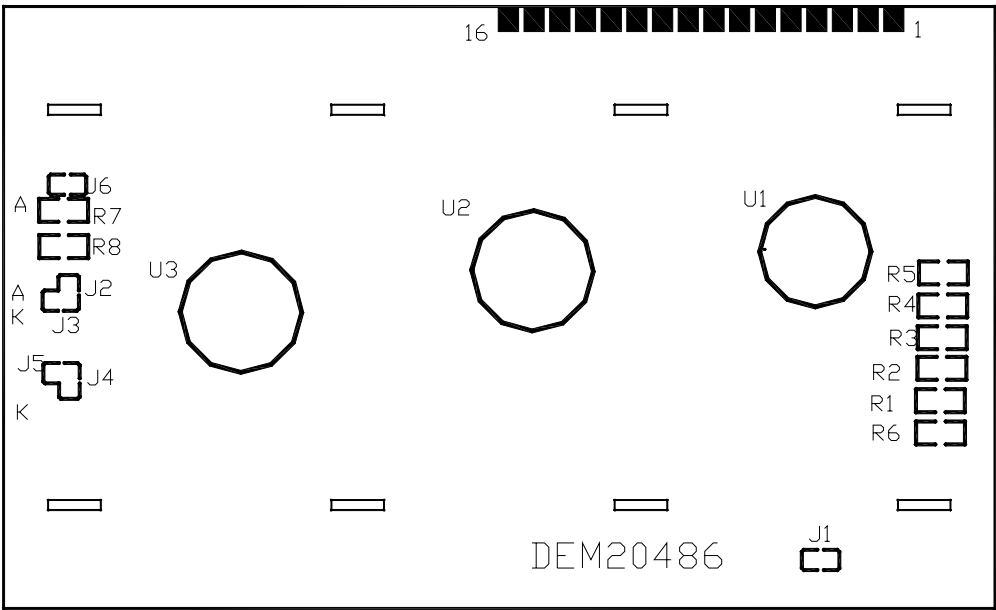

7. BACKLIGHT VOLTAGE AND CURRENT (Ta = -20 ~ 70°C)

Item	Symbol	MIN.	TYP.	MAX.	Unit	Conditions
Forward Voltage	Vf		4.0		V	
Forward Current	If		60	80	mA	If ~ 20mA
Power Dissipation	Pd		0.24		W	If ~ 20mA
Reverse Voltage	VR		4.0		V	
Reverse Current	IR			0.4	mA	
Luminous Intensity	L	60	80		cd/m ²	If ~ 20mA
Luminous Uniformity	Δ L	70			%	If ~ 20mA
Emission Wavelength	λ p		White		nm	If=20mA, Ta=25°C Each chip
Spectral Range	Δ λ		20		nm	

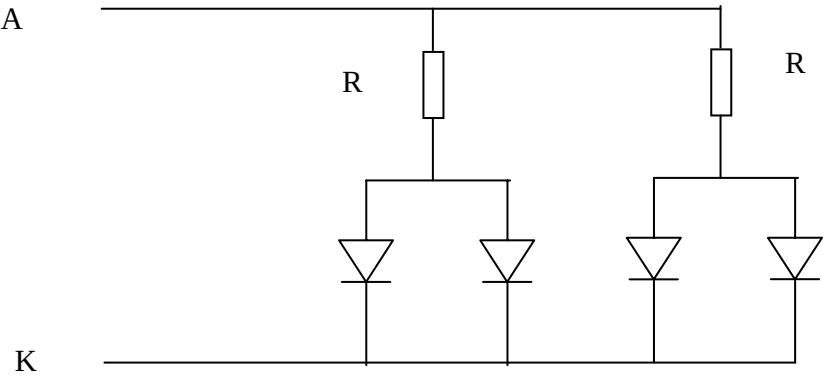

8. DISPLAY DATA RAM (DDRAM)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13	←
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53	← DDRAM ADDRESS
THIRDD LINE	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	20	21	22	23	24	25	26	27	
FOURTH LINE	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F	60	61	62	63	64	65	66	67	

9. MAXIMUM ABSOLUTE LIMIT (Ta=25°C)

Item	Symbol	Standard value	Unit
Power supply voltage (1)	V_{DD}	-0.3~+7.0	V
Power supply voltage (2)	V_0	$V_{DD}-13.5 \sim V_{DD}+0.3$	V
Input voltage	V_{IN}	-0.3~ $V_{DD}+0.3$	V
Operating temperature	T_{opr}	-20~+70	°C
Storage temperature	T_{stg}	-30~+80	°C

*Voltage greater than above may damage to the Circuit.

$$V_{DD} > V_1 > V_2 > V_3 > V_4 > V_5$$


10. ELECTRICAL CHARACTERISTICS

10-1 DC Characteristics ($V_{DD} = 4.5V \sim 5.5V$, $T_a = -20 \sim +70^{\circ}C$)

Item	Symbol	Standard Value			Test Condition	Unit
		MIN	TYP	MAX		
Operating Voltage	V_{DD}	4.5	5	5.5	-----	V
Supply Current	I_{DD}	----	0.35	0.6	$V_{DD}=5V, f_{osc}=270kHz$	mA
Input Voltage (1) (except OSC1)	V_{IL1}	-0.3	--	0.6	-----	V
	V_{IH1}	2.2	--	V_{DD}	-----	
Input Voltage (2) (OSC1)	V_{IL2}	-0.2	--	1.0	-----	V
	V_{IH2}	$V_{DD}-1.0$	--	V_{DD}	-----	
Output Voltage (1) (DB0 to DB7)	V_{OL1}	---	----	0.4	$I_{OL}=1.2mA$	V
	V_{OH1}	2.4	---	----	$I_{OH}=-0.205mA$	
Output Voltage (2) (except DB0 to DB7)	V_{OL2}	-----	---	$0.1V_{DD}$	$I_{OL}=40\mu A$	V
	V_{OH2}	$0.9V_{DD}$	---	-----	$I_{OH}=-40\mu A$	
Voltage Drop	V_{dCOM}	-----	---	1	$I_O=\pm 0.1 mA$	V
	V_{dSEG}	-----	---	1		
Input Leakage Current	I_{IKG}	-1	---	1	$V_{IN}=0 V \text{ to } V_{DD}$	μA
Input Low Current	I_{IL}	-50	-125	-250	$V_{IN}=0V, V_{DD}=5V(\text{pull up})$	μA
Internal Clock (external Rf)	f_{OSC1}	190	270	350	$R_f = 91k\pm 2\%$ $(V_{DD}=5V)$	kHz
External Clock	f_{OSC}	125	270	410	----	kHz
	Duty	45	50	55	----	%
	t_R, t_F	---	---	0.2	----	μs
LCD Driving Voltage	V_{LCD}	3.0	4.5	13.0	$V_{DD}-V_5 (1/5, 1/4 \text{ Bias})$	V


10-2 AC Characteristics ($V_{DD}=4.5V\sim 5.5V$, $T_a=-20\sim +70^{\circ}C$)
10-2-1 Write mode (writing data from MPU to module)

Characteristic	Symbol	Min	Typ	Max	Unit	Test PIN
E Cycle Time	t_C	500	---	---	ns	E
E Rise Time	t_R	---	---	20	ns	E
E Fall Time	t_F	---	---	20	ns	E
E Pulse width (High, Low)	t_W	230	---	---	ns	E
R/W and RS Set-up Time	t_{SU1}	40	---	---	ns	R/W,RS
R/W and RS Hold Time	t_{H1}	10	---	---	ns	R/W,RS
Data Set-up Time	t_{SU2}	80	---	---	ns	DB0~DB7
Data Hold Time	t_{H2}	10	---	---	ns	DB0~DB7

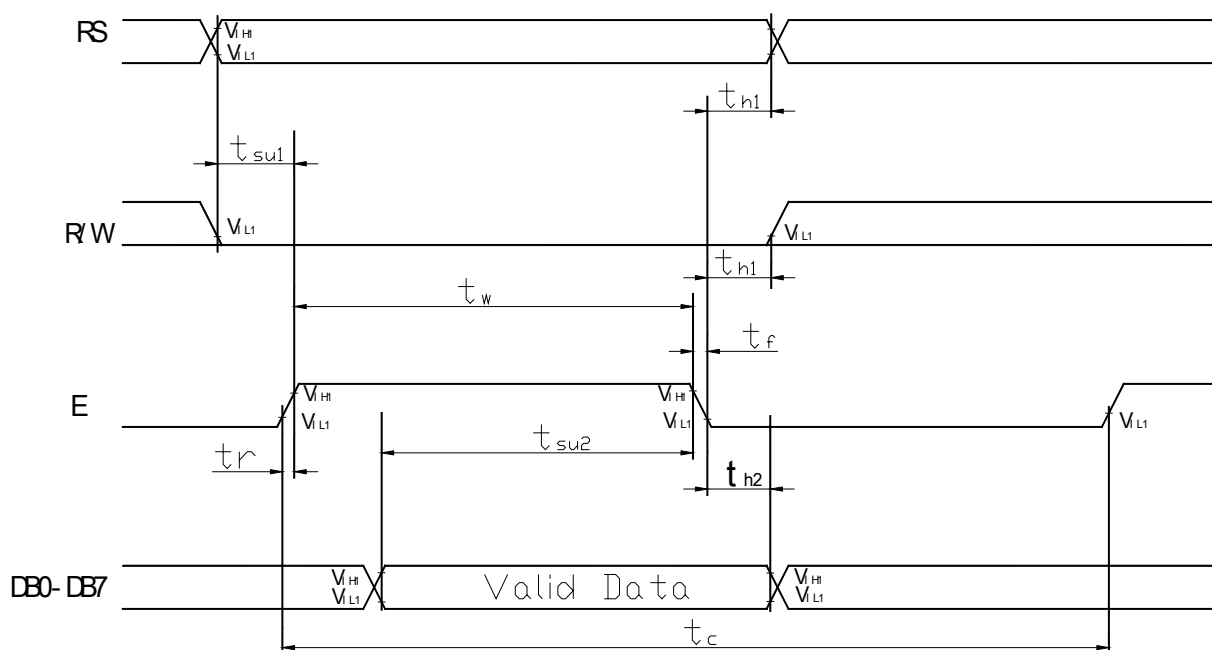

10-2-2 Read mode (reading data from module to MPU)

Characteristic	Symbol	Min	Typ	Max	Unit	Test PIN
E Cycle Time	t_C	500	---	---	ns	E
E Rise Time	t_R	---	---	20	ns	E
E Fall Time	t_F	---	---	20	ns	E
E Pulse width (High, Low)	t_W	230	---	---	ns	E
R/W and RS Set-up Time	t_{SU}	40	---	---	ns	R/W,RS
R/W and RS Hold Time	t_H	10	---	---	ns	R/W,RS
Data Output Delay Time	t_D	---	---	120	ns	DB0~DB7
Data Hold Time	t_{DH}	5	---	---	ns	DB0~DB7

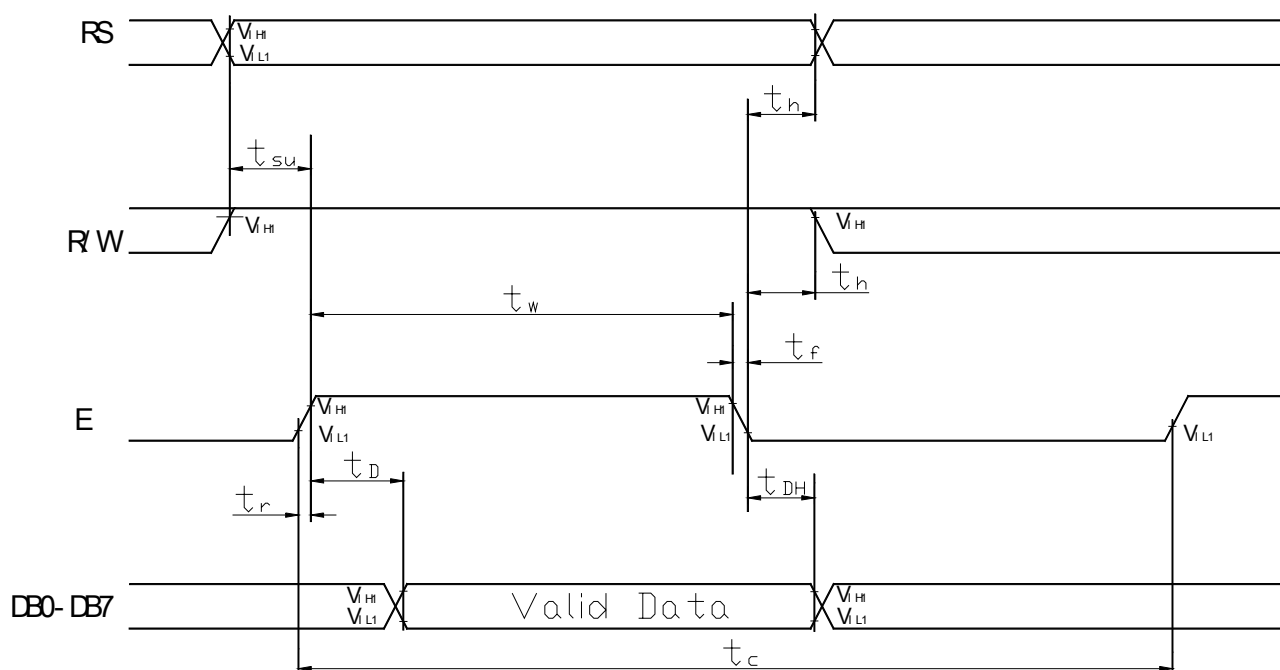

11. CONTROL AND DISPLAY COMMAND


Command	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Execution time (fosc=270KHz)	Remark														
clear Display	L	L	L	L	L	L	L	L	L	H	1.53ms	Write “20H” to DDRAM and set DDRAM address to “00H” from AC														
Return home	L	L	L	L	L	L	L	L	L	H	1.53ms	Cursor move to first digit														
Entry mode set	L	L	L	L	L	L	L	H	I/D	SH	39us	I/D:set cursor move direction														
												I/D	H	Increase												
													l	Decrease												
												SH:Specifies shift of display														
												SH	H	Display is shifted												
													L	Display is not shifted												
Display on/off control	L	L	L	L	L	L	L	H	D	C	B	39us	Display													
													D	H	Display on											
														L	Display off											
													Cursor													
													C	H	Cursor on											
														L	Cursor off											
													Blinking													
													B	H	Blinking on											
														L	Blinking off											
													Cursor or Display Shift	L	L	L	L	L	H	S/C	R/L	---	---	39us	SC	
																									H	Display shift
																									L	Cursor move
R/L	H	Right shift																								
L	Left shift																									
function Set	L	L	L	L	H	DL	N	F	---	---	39us	DL														
												H	8bits interface													
												L	4bits interface													
												N	H	2 line display												
												L	1 line display													
												F	H	5 x 11 dots												
												L	5 x 8 dots													
												Set CGRAM address	L	L	L	H	AC5	AC4	AC3	AC2	AC1	AC0	39us	CGRAM data is sent and received after this setting		
Set DDRAM address	L	L	H	AC6	AC5	AC4	AC3	AC2	AC1	AC0	39us	DDRAM data is sent and received after this setting														
Read busy flag& address	L	H	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	0us	BF														
												H	Busy													
												L	Ready													
Write data to RAM	H	L	D7	D6	D5	D4	D3	D2	D1	D0	43us	Write data into DDRAM or CGRAM														
Read data from RAM	H	H	D7	D6	D5	D4	D3	D2	D1	D0	43us	Read data from DDRAM or CGRAM														

12. STANDARD CHARACTER PATTERN

Upper(Bit) Lower(Bit)		LLLL	LLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)																
LLH	(2)																
LLHL	(3)																
LLHH	(4)																
LHLL	(5)																
LHLH	(6)																
LHHL	(7)																
LHHH	(8)																
HLLL	(1)																
HLLH	(2)																
HLHL	(3)																
HLHH	(4)																
HHLL	(5)																
HHLH	(6)																
HHHL	(7)																
HHHH	(8)																

13. LCM INITIALIZING BY INSTRUCTION

13-1 8-bit interface mode

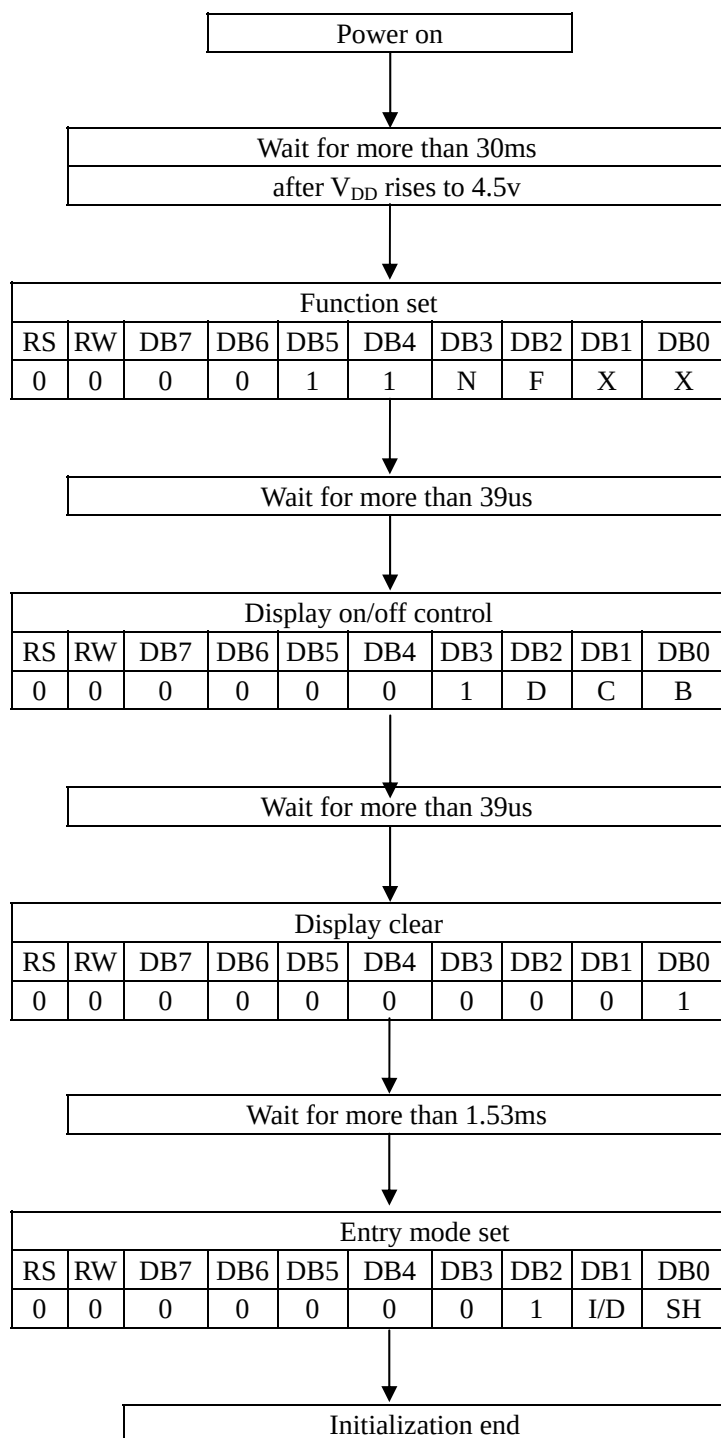

Condition: fosc=270khz

N	0	1-line mode
	1	2-line mode

F	0	5 x 8 dots
	1	5 x 11 dots

D	0	display off
	1	display on


C	0	cursor off
	1	cursor on

B	0	blink off
	1	blink on

I/D	0	decrement mode
	1	increment mode

SH	0	entire shift off
	1	entire shift on

13-2 4-bit interface mode

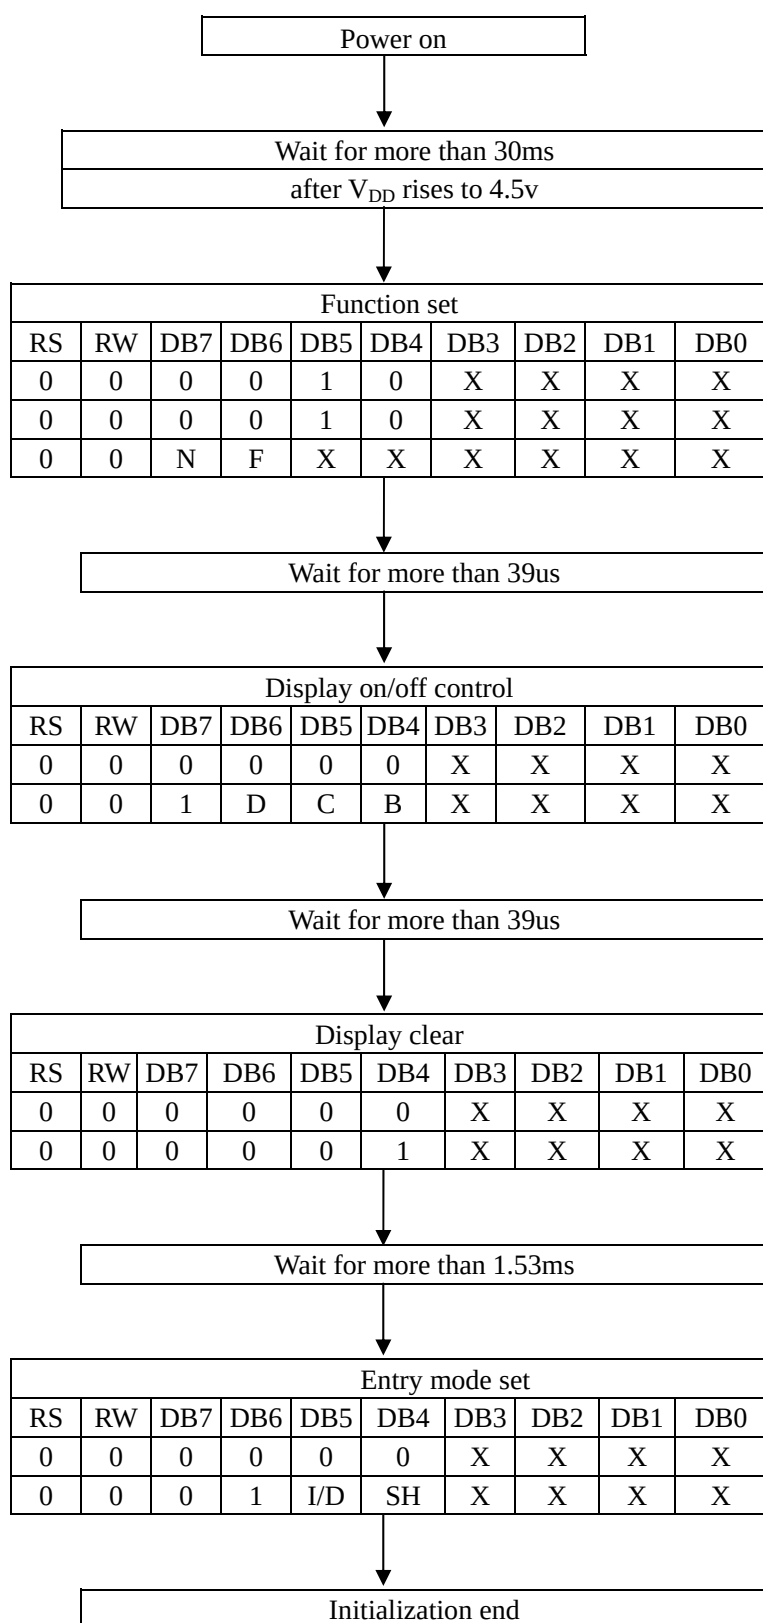

Condition: fosc=270khz

N	0	1-line mode
	1	2-line mode
F	0	5 x 8 dots
	1	5 x 11 dots

D	0	display off
	1	display on
C	0	cursor off
	1	cursor on
B	0	blink off
	1	blink on

I/D	0	decrement mode
	1	increment mode
SH	0	entire shift off
	1	entire shift on

14. LCD MODULES HANDLING PRECAUTIONS

- Please remove the protective foil of polarizer before using.
- The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- If the display panel is damaged and the liquid crystal substance inside it leaks out, do not get any in your mouth. If the substance come into contact with your skin or clothes promptly wash it off using soap and water.
- Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarize carefully.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD module.
 - Tools required for assembly, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- Storage precautions

When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags designed to prevent static electricity charging under low temperature / normal humidity conditions (avoid high temperature / high humidity and low temperatures below 0°C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

15. OTHERS

- Liquid crystals solidify at low temperature (below the storage temperature range) leading to defective orientation of liquid crystal or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subjected to a strong shock at a low temperature.
- If the LCD modules have been operating for a long time showing the same display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. Abnormal operating status can be resumed to be normal condition by suspending use for some time. It should be noted that this phenomena does not adversely affect performance reliability.
- To minimize the performance degradation of the LCD modules resulting from caused by static electricity, etc. exercise care to avoid holding the following sections when handling the modules:
 - Exposed area of the printed circuit board
 - Terminal electrode sections