

Features

- Output voltage ranges: Fixed range of 1.8V, 2.5V, 2.7V, 3.0V, 3.3V, 5.0V type.
- Highly accuracy: $\pm 2\%$
- Low voltage drop: 360mV (typ.), $V_{OUT}=5.0V$ at 500mA
- Guaranteed output current: 500mA
- Low quiescent current: 5 μ A (typ.)
- Current limiting
- Over-temperature shutdown
- SOT-89, TO-92 Packages

Applications

- Battery powered systems
- Personal Digital Assistants
- Peripheral cards
- PCMCIA cards
- Personal Communication Equipment

General Description

The HT78XX series of positive, linear regulators features low quiescent current (5 μ A typ.) with low dropout voltage, making them ideal for battery applications. The devices are capable of supplying 500mA of output current continuously.

They are available with several fixed output voltages ranging from 1.8V to 5.0V. Although designed primarily


as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.


These rugged devices have Thermal Shutdown and Current Limiting to prevent device failure under the "Worst" of operating conditions.

Selection Table

| Part No. | Output Voltage | Tolerance | Package |
|----------|----------------|-----------|-----------------|
| HT7818 | 1.8V | $\pm 2\%$ | SOT-89 TO-92 |
| HT7825 | 2.5V | | |
| HT7827 | 2.7V | | |
| HT7830 | 3.0V | | |
| HT7833 | 3.3V | | |
| HT7850 | 5.0V | | |

Block Diagram

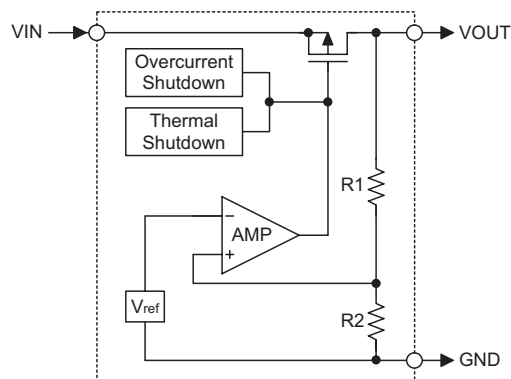

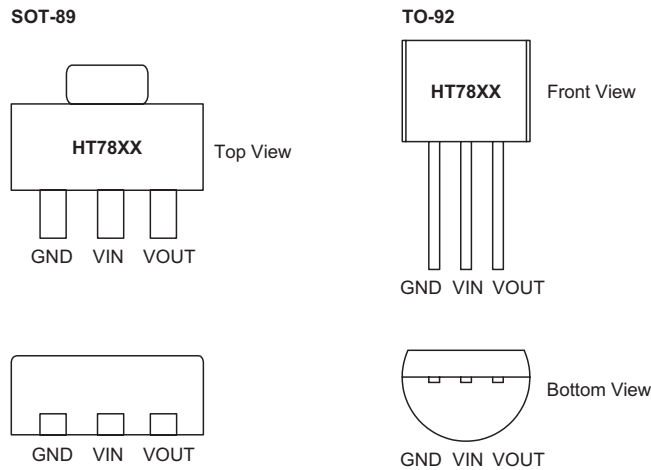Pin Assignment


Note: For lead free devices, a # mark is suffixed at the end of the date code.

Absolute Maximum Ratings*

Maximum Supply Voltage up to 8.5V Storage Temperature -50°C to 125°C
 Operating Temperature -40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

*** Absolute maximum ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. The guaranteed specifications apply only for the test conditions listed.

Thermal Information


| Symbol | Parameter | Package | Max. | Unit |
|---------------|---|---------|------|------|
| θ_{JA} | Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink) | SOT-89 | 200 | °C/W |
| | | TO-92 | 200 | °C/W |
| P_D | Power Dissipation | SOT-89 | 0.50 | W |
| | | TO-92 | 0.50 | W |

Note: P_D is measured at $T_a = 25^\circ\text{C}$


Electrical Characteristics
 $T_J=25^{\circ}\text{C}$, $V_{IN}=V_{OUT}+1.0\text{V}$, $I_O=1\text{mA}$, unless otherwise specified

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|-------------------------------------|--------------------------|--|---|-----------|-------|------------------------|----|
| V_{IN} | Input Voltage | — | — | — | 8 | V | |
| ΔV_{OUT} | Output Voltage Tolerance | — | -2 | — | 2 | % | |
| I_{SS} | Quiescent Current | $I_O=0\text{mA}$ | — | 5 | 7 | μA | |
| ΔV_{LOAD} | Load Regulation (Note1) | $1\text{mA} \leq I_{OUT} \leq 500\text{mA}$ | — | 0.004 | 0.008 | %/mA | |
| V_{DROP} | Dropout Voltage (Note2) | $\Delta V_{OUT}=2\%$ $I_{OUT}=500\text{mA}$ | $V_O \leq 1.8\text{V}$ | — | 800 | 1200 | mV |
| | | | $2.5\text{V} \leq V_O \leq 2.7\text{V}$ | — | 500 | 650 | |
| | | | $3.0\text{V} \leq V_O \leq 5.0\text{V}$ | — | 360 | 500 | |
| ΔV_{LINE} | Line Regulation | $V_{OUT}+1.0\text{V} \leq V_{IN} \leq 8.0\text{V}$ | — | 0.2 | 0.3 | %/V | |
| I_{LIM} | Current Limit (Note3) | $\Delta V_{OUT}=10\%$ | 500 | — | — | mA | |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | $-40^{\circ}\text{C} < T_a < 85^{\circ}\text{C}$ | — | ± 0.8 | — | mV/ $^{\circ}\text{C}$ | |

- Note:
1. Load regulation is measured at a constant junction temperature, using pulse testing with a low ON time and is guaranteed up to the maximum power dissipation. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range. The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_a) / \theta_{JA}$.
 2. Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN} = V_{OUT} + 1\text{V}$ with a fixed load.
 3. Current limit is measured by pulsing for a short time.

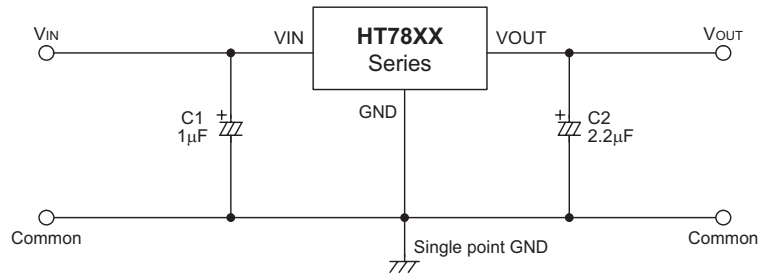Application Circuits
Basic Circuits

Typical Application Circuits

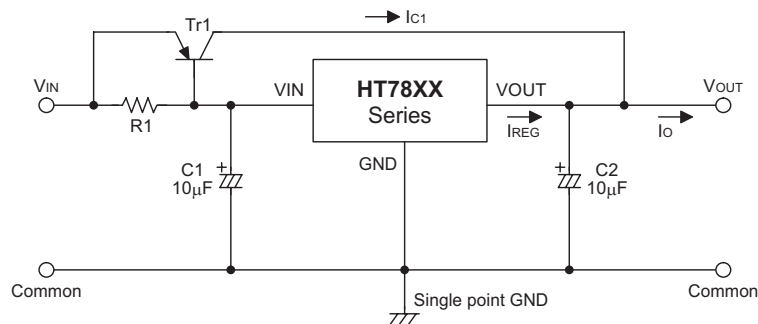
- High output current positive voltage regulator



$$R_1 = \frac{V_{BE1}}{I_{REG} - \frac{I_{C1}}{(1+\beta)}}$$


$$I_O = I_{C1} + I_{REG}$$

• Increased Output voltage Circuit

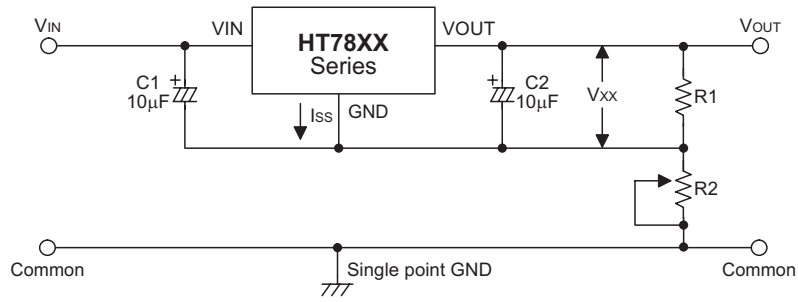

$$V_{OUT} = V_{xx} \left(1 + \frac{R_2}{R_1}\right) + I_{ss} R_2$$


• Dual Supply Circuit

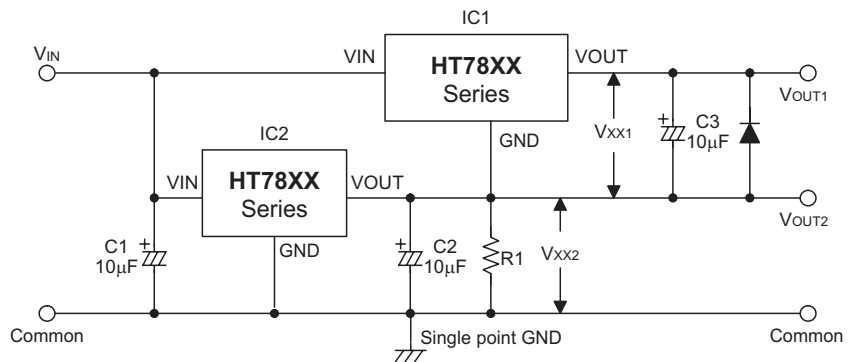

$$V_{OUT1} = V_{xx2} + V_{xx1}$$

$$V_{OUT2} = V_{xx2}$$


• Tracking Voltage Regulator

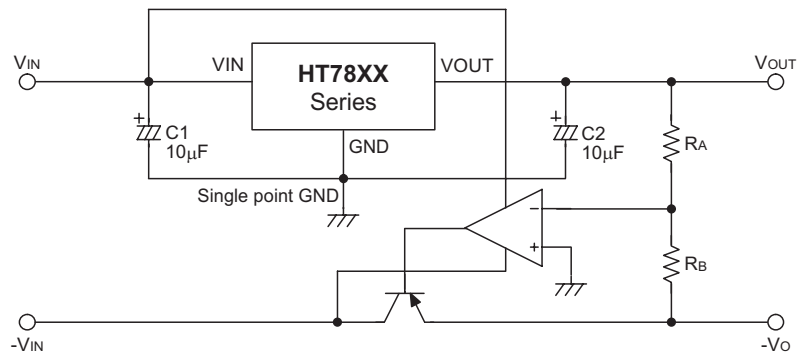

$$-V_o = V_o \times \frac{R_A}{R_B}$$


Package Information

3-Pin SOT-89 Outline Dimensions

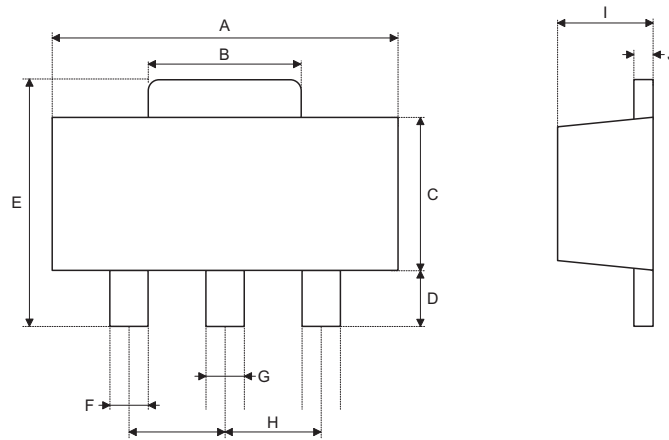

| Symbol | Dimensions in mil | | |
|--------|-------------------|------|------|
| | Min. | Nom. | Max. |
| A | 173 | — | 181 |
| B | 64 | — | 72 |
| C | 90 | — | 102 |
| D | 35 | — | 47 |
| E | 155 | — | 167 |
| F | 14 | — | 19 |
| G | 17 | — | 22 |
| H | — | 59 | — |
| I | 55 | — | 63 |
| J | 14 | — | 17 |


3-Pin TO-92 Outline Dimensions

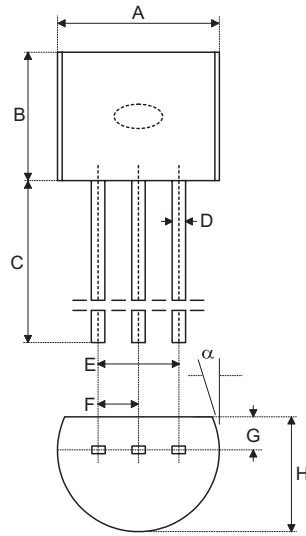

| Symbol | Dimensions in mil | | |
|----------|-------------------|------|------|
| | Min. | Nom. | Max. |
| A | 170 | — | 200 |
| B | 170 | — | 200 |
| C | 500 | — | — |
| D | 11 | — | 20 |
| E | 90 | — | 110 |
| F | 45 | — | 55 |
| G | 45 | — | 65 |
| H | 130 | — | 160 |
| I | 8 | — | 18 |
| α | 4° | — | 6° |

Product Tape and Reel Specifications


Reel Dimensions

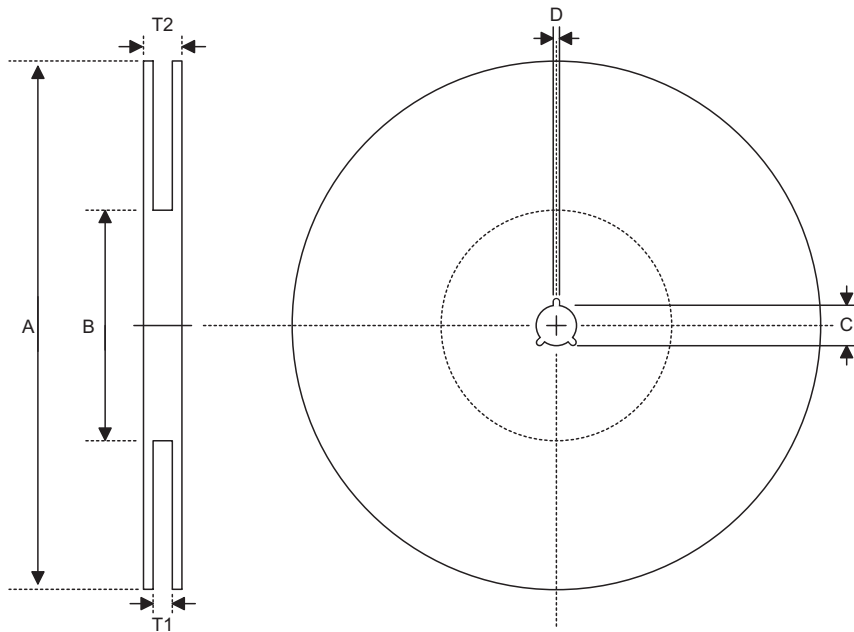


SOT-89


| Symbol | Description | Dimensions in mm |
|--------|-----------------------|------------------|
| A | Reel Outer Diameter | 180±1.0 |
| B | Reel Inner Diameter | 62±1.5 |
| C | Spindle Hole Diameter | 12.75+0.15 |
| D | Key Slit Width | 1.9±0.15 |
| T1 | Space Between Flange | 12.4+0.2 |
| T2 | Reel Thickness | 17-0.4 |

TO-92 Reel Dimensions (Unit: mm)

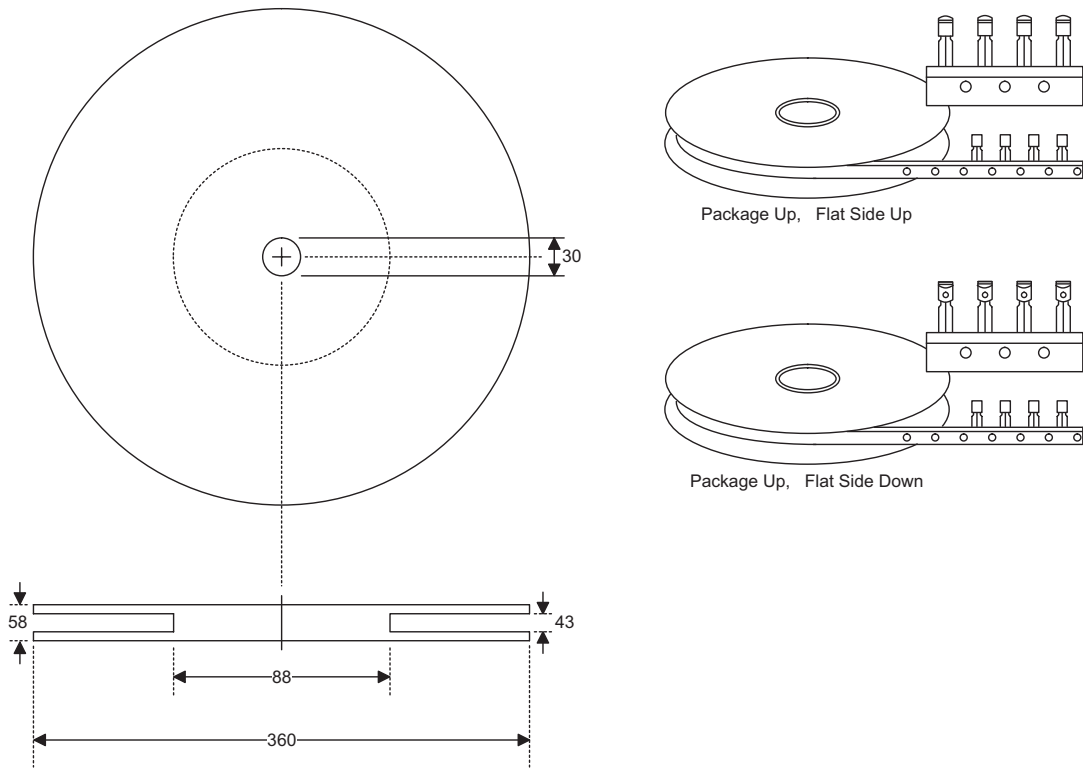

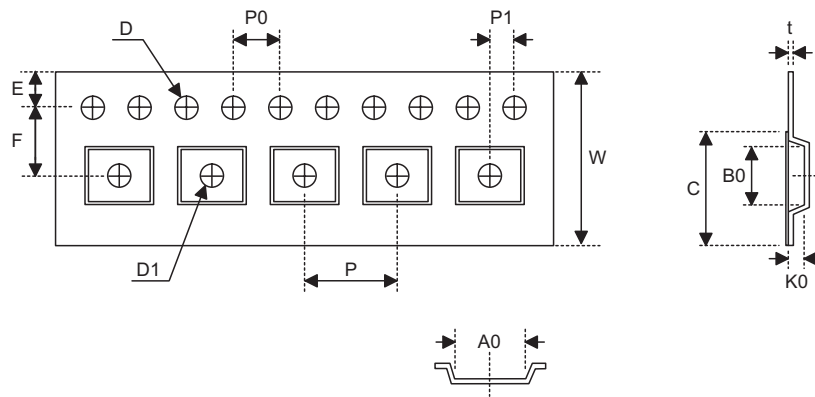Carrier Tape Dimensions

SOT-89
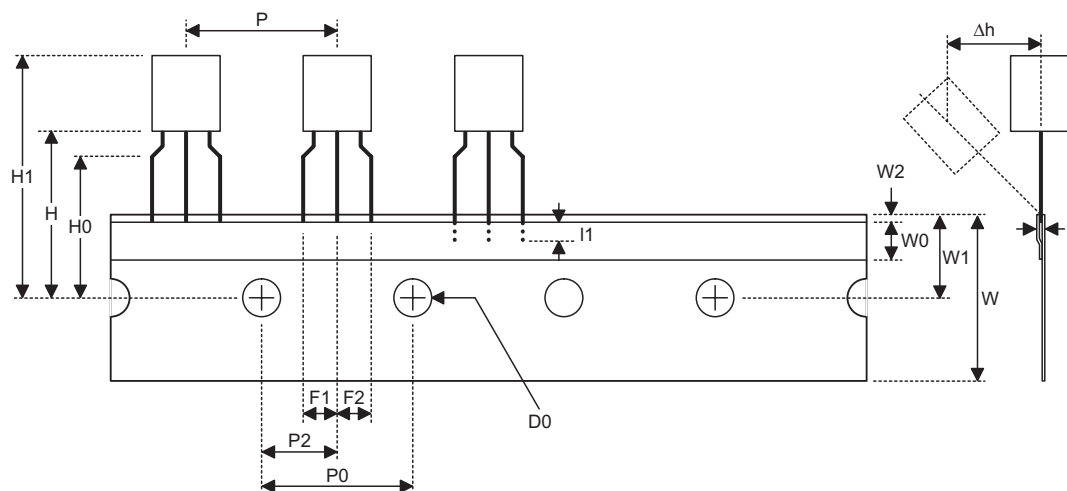
| Symbol | Description | Dimensions in mm |
|--------|--|------------------|
| W | Carrier Tape Width | 12.0+0.3 -0.1 |
| P | Cavity Pitch | 8.0±0.1 |
| E | Perforation Position | 1.75±0.1 |
| F | Cavity to Perforation (Width Direction) | 5.5±0.05 |
| D | Perforation Diameter | 1.5±0.1 |
| D1 | Cavity Hole Diameter | 1.5±0.1 |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.0±0.10 |
| A0 | Cavity Length | 4.8±0.1 |
| B0 | Cavity Width | 4.5±0.1 |
| K0 | Cavity Depth | 1.8±0.1 |
| t | Carrier Tape Thickness | 0.30±0.013 |
| C | Cover Tape Width | 9.3 |

TO-92 Carrier Tape Dimensions

TO-92

| Symbol | Description | Dimensions in mm |
|----------------|---|------------------|
| l1 | Taped Lead Length | (2.5) |
| P | Component Pitch | 12.7±1.0 |
| P ₀ | Perforation Pitch | 12.7±0.3 |
| P ₂ | Component to Perforation (Length Direction) | 6.35±0.4 |
| F ₁ | Lead Spread | 2.5+0.4 -0.1 |
| F ₂ | Lead Spread | 2.5+0.4 -0.1 |
| Δh | Component Alignment | 0±0.1 |
| W | Carrier Tape Width | 18.0+1.0 -0.5 |
| W ₀ | Hold-down Tape Width | 6.0±0.5 |
| W ₁ | Perforation Position | 9.0±0.5 |
| W ₂ | Hold-down Tape Position | (0.5) |
| H ₀ | Lead Clinch Height | 16.0±0.5 |
| H ₁ | Component Height | Less than 24.7 |
| D ₀ | Perforation Diameter | 4.0±0.2 |
| t | Taped Lead Thickness | 0.7±0.2 |
| H | Component Base Height | 19.0±0.5 |

Note: Thickness less than 0.38±0.05mm~0.5mm

P₀ Accumulated pitch tolerance: ±1mm/20pitches.

() Bracketed figures are for consultation only

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
<http://www.holtek.com.tw>

Holtek Semiconductor Inc. (Taipei Sales Office)

4F-2, No. 3-2, YuanQu St., Nankang Software Park, Taipei 115, Taiwan
Tel: 886-2-2655-7070
Fax: 886-2-2655-7373
Fax: 886-2-2655-7383 (International sales hotline)

Holtek Semiconductor Inc. (Shanghai Sales Office)

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China 200233
Tel: 86-21-6485-5560
Fax: 86-21-6485-0313
<http://www.holtek.com.cn>

Holtek Semiconductor Inc. (Shenzhen Sales Office)

5/F, Unit A, Productivity Building, Cross of Science M 3rd Road and Gaoxin M 2nd Road, Science Park, Nanshan District, Shenzhen, China 518057
Tel: 86-755-8616-9908, 86-755-8616-9308
Fax: 86-755-8616-9722

Holtek Semiconductor Inc. (Beijing Sales Office)

Suite 1721, Jinyu Tower, A129 West Xuan Wu Men Street, Xicheng District, Beijing, China 100031
Tel: 86-10-6641-0030, 86-10-6641-7751, 86-10-6641-7752
Fax: 86-10-6641-0125

Holtek Semiconductor Inc. (Chengdu Sales Office)

709, Building 3, Champagne Plaza, No.97 Dongda Street, Chengdu, Sichuan, China 610016
Tel: 86-28-6653-6590
Fax: 86-28-6653-6591

Holtek Semiconductor (USA), Inc. (North America Sales Office)

46729 Fremont Blvd., Fremont, CA 94538
Tel: 1-510-252-9880
Fax: 1-510-252-9885
<http://www.holtek.com>

Copyright © 2007 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.