

# FDS8958A

## Dual N & P-Channel PowerTrench® MOSFET

### General Description



These dual N- and P-Channel enhancement mode power field effect transistors are produced using Fairchild Semiconductor's advanced PowerTrench process that has been especially tailored to minimize on-state resistance and yet maintain superior switching performance.

These devices are well suited for low voltage and battery powered applications where low in-line power loss and fast switching are required.



### Features

- **Q1:** N-Channel  
7.0A, 30V  $R_{DS(on)} = 0.028\Omega @ V_{GS} = 10V$   
 $R_{DS(on)} = 0.040\Omega @ V_{GS} = 4.5V$
- **Q2:** P-Channel  
-5A, -30V  $R_{DS(on)} = 0.052\Omega @ V_{GS} = -10V$   
 $R_{DS(on)} = 0.080\Omega @ V_{GS} = -4.5V$
- Fast switching speed
- High power and handling capability in a widely used surface mount package

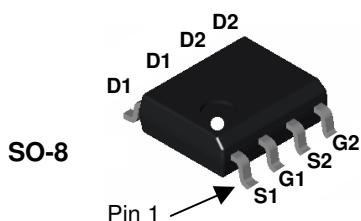

### Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Q1	Q2	Units
$V_{DS}$	Drain-Source Voltage	30	30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	$\pm 20$	V
$I_D$	Drain Current - Continuous (Note 1a)	7	-5	A
	- Pulsed	20	-20	
$P_D$	Power Dissipation for Dual Operation	2	2	W
	Power Dissipation for Single Operation (Note 1a)	1.6	1.6	
	(Note 1c)	0.9	0.9	
$E_{AS}$	Single Pulse Avalanche Energy (Note 3)	54	13	mJ
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55 to +150		$^\circ\text{C}$

### Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1a)	78	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case (Note 1)	40	$^\circ\text{C/W}$

### Package Marking and Ordering Information

Device Marking	Device	Reel Size	Tape width	Quantity
FDS8958A	FDS8958A	13"	12mm	2500 units

**Electrical Characteristics** $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
<b>Off Characteristics</b>							
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$ $V_{GS} = 0\text{ V}, I_D = -250\ \mu\text{A}$	Q1 Q2	30 -30			V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	$I_D = 250\ \mu\text{A}$ , Referenced to $25^\circ\text{C}$ $I_D = -250\ \mu\text{A}$ , Referenced to $25^\circ\text{C}$	Q1 Q2		25 -23		mV/ $^\circ\text{C}$
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = 24\text{ V}, V_{GS} = 0\text{ V}$ $V_{DS} = -24\text{ V}, V_{GS} = 0\text{ V}$	Q1 Q2			1 -1	$\mu\text{A}$
$I_{GSSF}$	Gate-Body Leakage, Forward	$V_{GS} = 20\text{ V}, V_{DS} = 0\text{ V}$	All			100	nA
$I_{GSSR}$	Gate-Body Leakage, Reverse	$V_{GS} = -20\text{ V}, V_{DS} = 0\text{ V}$	All			-100	nA
<b>On Characteristics (Note 2)</b>							
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$ $V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	Q1 Q2	1 -1	1.9 -1.7	3 -3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	$I_D = 250\ \mu\text{A}$ , Referenced to $25^\circ\text{C}$ $I_D = -250\ \mu\text{A}$ , Referenced to $25^\circ\text{C}$	Q1 Q2		-4.5 4.5		mV/ $^\circ\text{C}$
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = 10\text{ V}, I_D = 7\text{ A}$ $V_{GS} = 10\text{ V}, I_D = 7\text{ A}, T_J = 125^\circ\text{C}$ $V_{GS} = 4.5\text{ V}, I_D = 6\text{ A}$ $V_{GS} = -10\text{ V}, I_D = -5\text{ A}$ $V_{GS} = -10\text{ V}, I_D = -5\text{ A}, T_J = 125^\circ\text{C}$ $V_{GS} = -4.5\text{ V}, I_D = -4\text{ A}$	Q1   Q2		19 27 24 42 57 65	28 42 40 52 78 80	m $\Omega$
$I_{D(on)}$	On-State Drain Current	$V_{GS} = 10\text{ V}, V_{DS} = 5\text{ V}$ $V_{GS} = -10\text{ V}, V_{DS} = -5\text{ V}$	Q1 Q2	20 -20			A
$g_{FS}$	Forward Transconductance	$V_{DS} = 5\text{ V}, I_D = 7\text{ A}$ $V_{DS} = -5\text{ V}, I_D = -5\text{ A}$	Q1 Q2		25 10		S
<b>Dynamic Characteristics</b>							
$C_{iss}$	Input Capacitance	$V_{DS} = 15\text{ V}, V_{GS} = 0\text{ V}, f = 1.0\text{ MHz}$	Q1 Q2		575 528		pF
$C_{oss}$	Output Capacitance		Q1 Q2		145 132		pF
$C_{riss}$	Reverse Transfer Capacitance	$V_{DS} = -15\text{ V}, V_{GS} = 0\text{ V}, f = 1.0\text{ MHz}$	Q1 Q2		65 70		pF
$R_G$	Gate Resistance		$V_{GS} = 15\text{ mV}, f = 1.0\text{ MHz}$	Q1 Q2		2.1 6.0	

**Electrical Characteristics (continued)**  $T_A = 25^\circ\text{C}$  unless otherwise noted


Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
<b>Switching Characteristics</b> (Note 2)							
$t_{d(on)}$	Turn-On Delay Time	Q1 $V_{DD} = 15\text{ V}, I_D = 1\text{ A},$ $V_{GS} = 10\text{ V}, R_{GEN} = 6\ \Omega$	Q1 Q2		8 7	16 14	ns
$t_r$	Turn-On Rise Time		Q1 Q2		5 13	10 24	ns
$t_{d(off)}$	Turn-Off Delay Time	Q2 $V_{DD} = -15\text{ V}, I_D = -1\text{ A},$ $V_{GS} = -10\text{ V}, R_{GEN} = 6\ \Omega$	Q1 Q2		23 14	37 25	ns
$t_f$	Turn-Off Fall Time		Q1 Q2		3 9	6 17	ns
$Q_g$	Total Gate Charge	Q1 $V_{DS} = 15\text{ V}, I_D = 7\text{ A}, V_{GS} = 10\text{ V}$	Q1 Q2		11.4 9.6	16 13	nC
$Q_{gs}$	Gate-Source Charge	Q2	Q1 Q2		1.7 2.2		nC
$Q_{gd}$	Gate-Drain Charge	$V_{DS} = -15\text{ V}, I_D = -5\text{ A}, V_{GS} = -10\text{ V}$	Q1 Q2		2.1 1.7		nC

**Drain-Source Diode Characteristics and Maximum Ratings**


$I_S$	Maximum Continuous Drain-Source Diode Forward Current		Q1 Q2			1.3 -1.3	A
$I_{SM}$	Maximum Pulsed Drain-Source Diode Forward Current (Note 2)		Q1 Q2			20 -20	A
$V_{SD}$	Drain-Source Diode Forward Voltage	$V_{GS} = 0\text{ V}, I_S = 1.3\text{ A}$ (Note 2) $V_{GS} = 0\text{ V}, I_S = -1.3\text{ A}$ (Note 2)	Q1 Q2		0.75 -0.88	1.2 -1.2	V
$t_{rr}$	Diode Reverse Recovery Time	Q1 $I_F = 7\text{ A}, d_{IF}/d_t = 100\text{ A}/\mu\text{s}$	Q1 Q2		19 19		nS
$Q_{rr}$	Diode Reverse Recovery Charge	Q2 $I_F = -5\text{ A}, d_{IF}/d_t = 100\text{ A}/\mu\text{s}$	Q1 Q2		9 6		nC

**Notes:**


- $R_{\theta JA}$  is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.



a) 78°/W when mounted on a 0.5 in<sup>2</sup> pad of 2 oz copper



b) 125°/W when mounted on a .02 in<sup>2</sup> pad of 2 oz copper



c) 135°/W when mounted on a minimum pad.

Scale 1 : 1 on letter size paper

- Pulse Test: Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2.0%
- Starting  $T_J = 25^\circ\text{C}$ ,  $L = 3\text{ mH}$ ,  $I_{AS} = 6\text{ A}$ ,  $V_{DD} = 30\text{ V}$ ,  $V_{GS} = 10\text{ V}$  (Q1).  
Starting  $T_J = 25^\circ\text{C}$ ,  $L = 3\text{ mH}$ ,  $I_{AS} = 3\text{ A}$ ,  $V_{DD} = 30\text{ V}$ ,  $V_{GS} = 10\text{ V}$  (Q2).

## Typical Characteristics: Q1 (N-Channel)

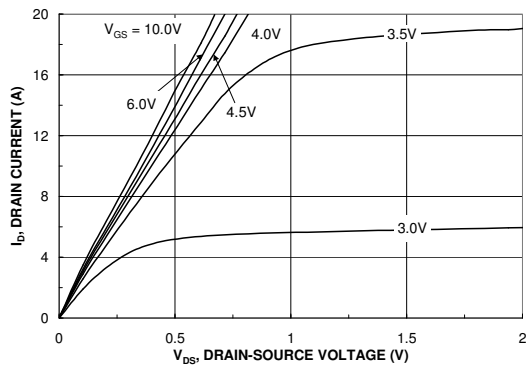


Figure 1. On-Region Characteristics.

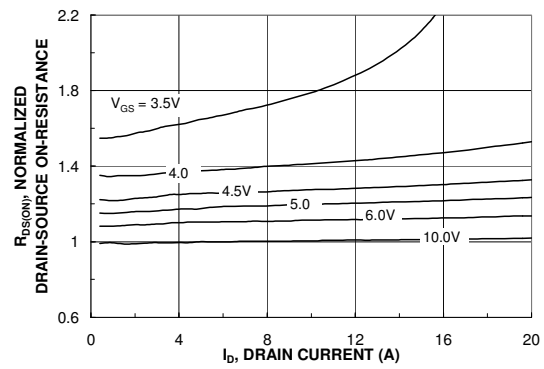


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

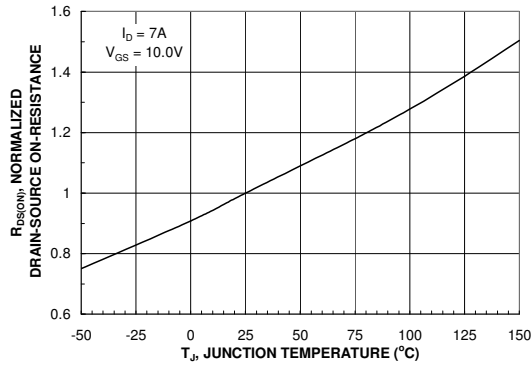


Figure 3. On-Resistance Variation with Temperature.

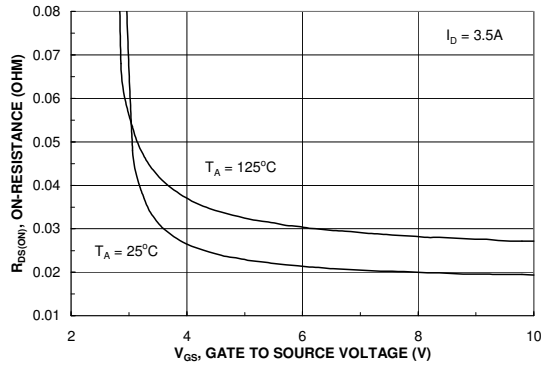


Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

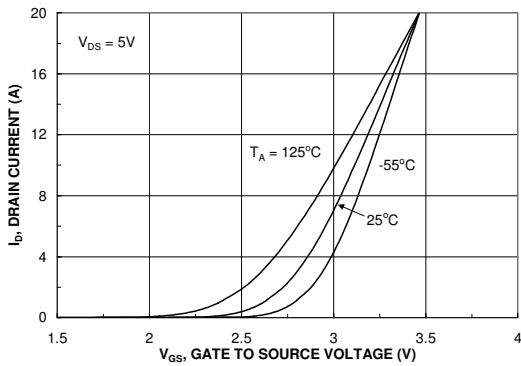


Figure 5. Transfer Characteristics.



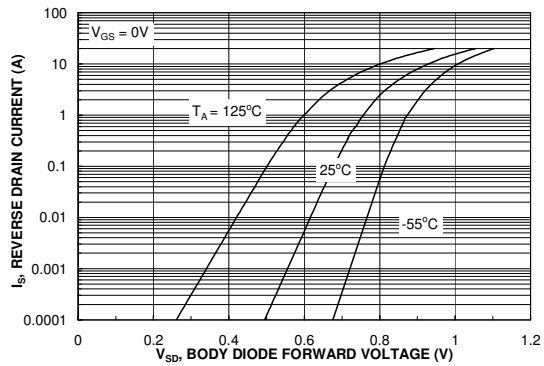


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.


### Typical Characteristics: Q1 (N-Channel)

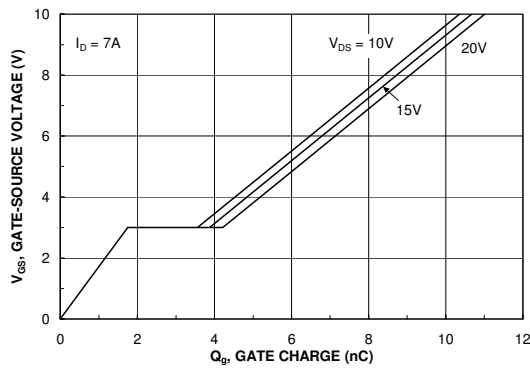


**Figure 7. Gate Charge Characteristics.**

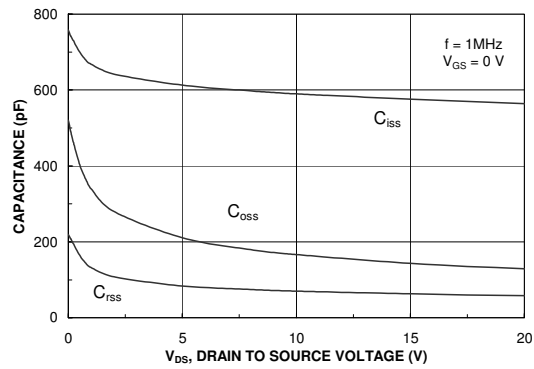


**Figure 8. Capacitance Characteristics.**

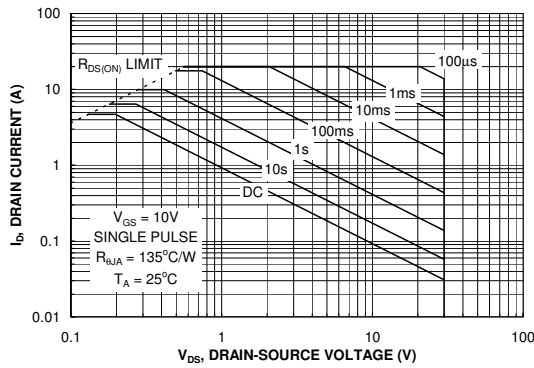

**Figure 9. Maximum Safe Operating Area.**

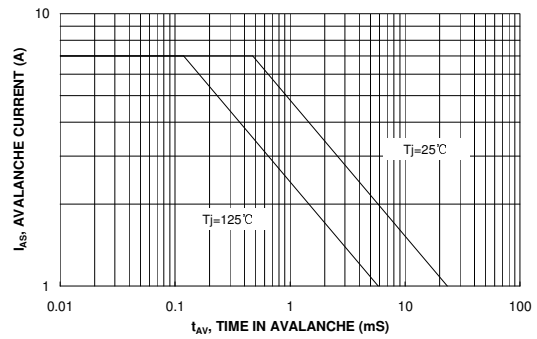

**Figure 10. Unclamped Inductive Switching Capability Figure**

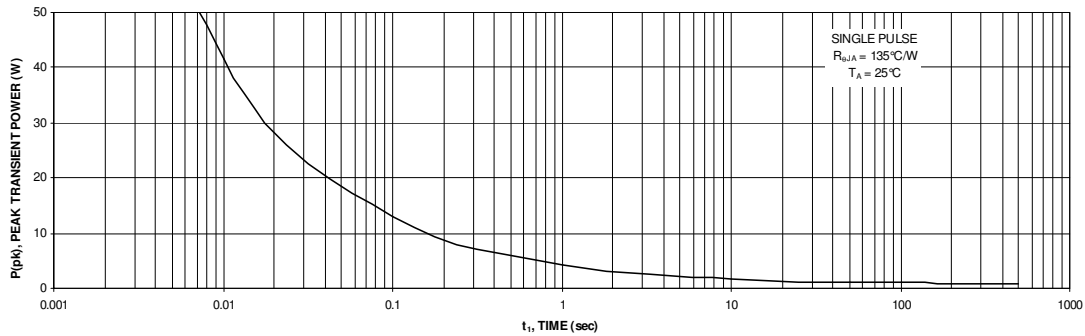

**Figure 11. Single Pulse Maximum Power Dissipation.**

### Typical Characteristics: Q2 (P-Channel)

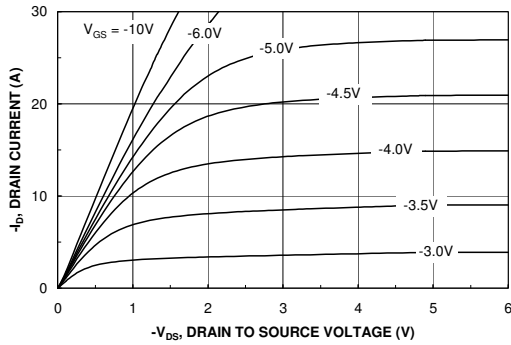


Figure 12. On-Region Characteristics.

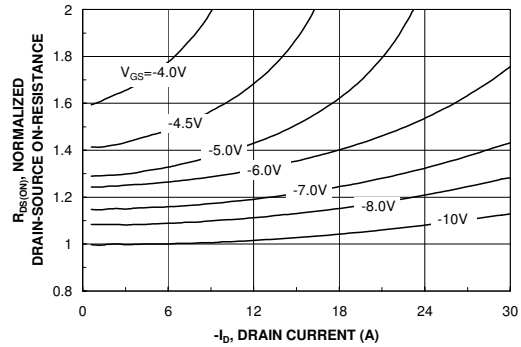


Figure 13. On-Resistance Variation with Drain Current and Gate Voltage.

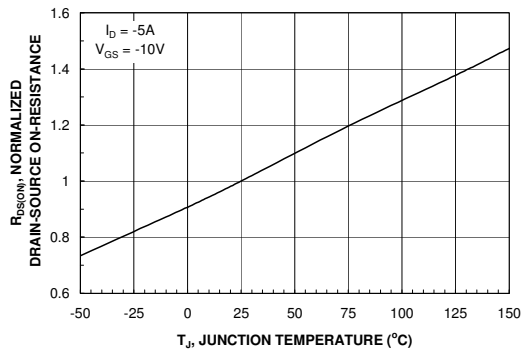


Figure 14. On-Resistance Variation with Temperature.

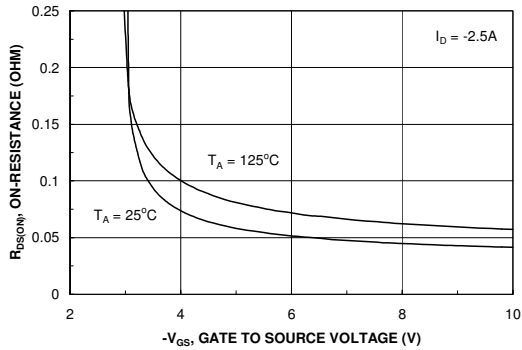


Figure 15. On-Resistance Variation with Gate-to-Source Voltage.

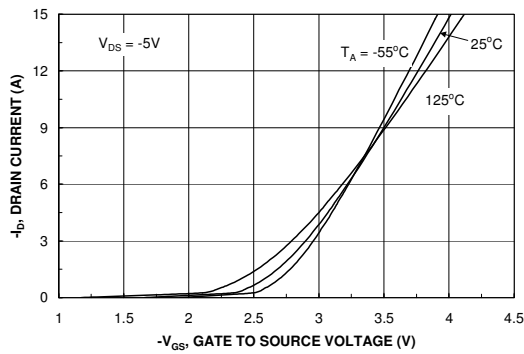


Figure 16. Transfer Characteristics.


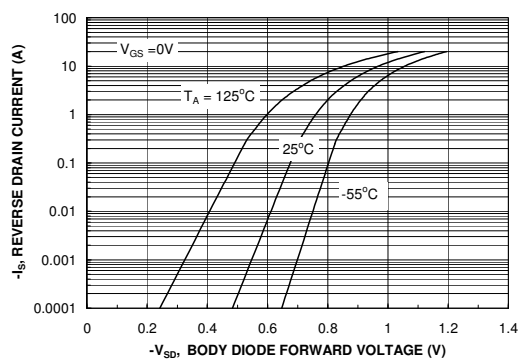


Figure 17. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics: Q2 (P-Channel)

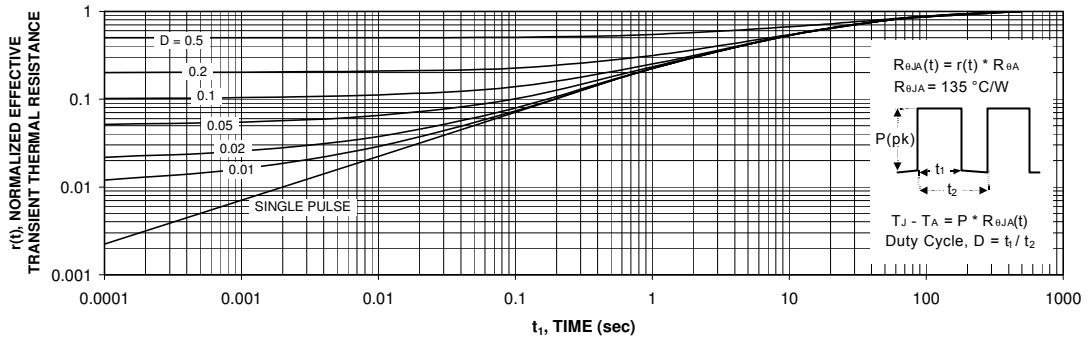

**Figure 23. Transient Thermal Response Curve.**

Thermal characterization performed using the conditions described in Note 1c.  
 Transient thermal response will change depending on the circuit board design.



**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- |                                      |  |   |                                  |
|--------------------------------------|--|---|----------------------------------|
| ACEx <sup>®</sup>                    | FPS <sup>™</sup>                             | PDP-SPM <sup>™</sup>                        | The Power Franchise <sup>®</sup> |
| Build it Now <sup>™</sup>            | F-PFS <sup>™</sup>                           | Power-SPM <sup>™</sup>                      | <b>power</b><br>the franchise    |
| CorePLUS <sup>™</sup>                | FRFET <sup>®</sup>                           | PowerTrench <sup>®</sup>                    | TinyBoost <sup>™</sup>           |
| CorePOWER <sup>™</sup>               | Global Power Resource <sup>SM</sup>          | Programmable Active Droop <sup>™</sup>      | TinyBuck <sup>™</sup>            |
| CROSSVOLT <sup>™</sup>               | Green FPS <sup>™</sup>                       | QFET <sup>®</sup>                           | TinyLogic <sup>®</sup>           |
| CTL <sup>™</sup>                     | Green FPS <sup>™</sup> e-Series <sup>™</sup> | QS <sup>™</sup>                             | TINYOPTO <sup>™</sup>            |
| Current Transfer Logic <sup>™</sup>  | GTO <sup>™</sup>                             | Quiet Series <sup>™</sup>                   | TinyPower <sup>™</sup>           |
| EcoSPARK <sup>®</sup>                | IntelliMAX <sup>™</sup>                      | RapidConfigure <sup>™</sup>                 | TinyPWM <sup>™</sup>             |
| EfficientMax <sup>™</sup>            | ISOPLANAR <sup>™</sup>                       | Saving our world 1mW at a time <sup>™</sup> | TinyWire <sup>™</sup>            |
| EZSWITCH <sup>™</sup> *              | MegaBuck <sup>™</sup>                        | SmartMax <sup>™</sup>                       | μSerDes <sup>™</sup>             |
|                                      | MICROCOUPLER <sup>™</sup>                    | SMART START <sup>™</sup>                    |                                  |
|                                      | MicroFET <sup>™</sup>                        | SPM <sup>®</sup>                            | UHC <sup>®</sup>                 |
| Fairchild <sup>®</sup>               | MicroPak <sup>™</sup>                        | STEALTH <sup>™</sup>                        | Ultra FRFET <sup>™</sup>         |
| Fairchild Semiconductor <sup>®</sup> | MillerDrive <sup>™</sup>                     | SuperFET <sup>™</sup>                       | UniFET <sup>™</sup>              |
| FACT Quiet Series <sup>™</sup>       | MotionMax <sup>™</sup>                       | SuperSOT <sup>™</sup> -3                    | VCX <sup>™</sup>                 |
| FACT <sup>®</sup>                    | Motion-SPM <sup>™</sup>                      | SuperSOT <sup>™</sup> -6                    | VisualMax <sup>™</sup>           |
| FAST <sup>®</sup>                    | OPTOLOGIC <sup>®</sup>                       | SuperSOT <sup>™</sup> -8                    |                                  |
| FastvCore <sup>™</sup>               | OPTOPLANAR <sup>®</sup>                      | SuperMOS <sup>™</sup>                       |                                  |
| FlashWriter <sup>®</sup> *           |  |   |                                  |

\* EZSWITCH<sup>™</sup> and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**PRODUCT STATUS DEFINITIONS**

**Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	This datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.