

TL601, TL604, TL607, TL610 P-MOS ANALOG SWITCHES

SLAS042 – D2161, JUNE 1976 — REVISED OCTOBER 1986

- Switch ± 10 -V Analog Signals
- TTL Logic Capability
- 5-to 30-V Supply Ranges
- Low (100Ω) On-State Resistance
- High ($10^{11} \Omega$) Off-State Resistance
- 8-Pin Functions

description





The TL601, TL604, TL607, and TL610 are a family of monolithic P-MOS analog switches that provide fast switching speeds with high r_{off}/r_{on} ratio and no offset voltage. The p-channel enhancement-type MOS switches accept analog signals up to ± 10 V and are controlled by TTL-compatible logic inputs. The monolithic structure is made possible by BI-MOS technology, which combines p-channel MOS with standard bipolar transistors.

These switches are particularly useful in military, industrial, and commercial applications such as data acquisition, multiplexers, A/D and D/A converters, MODEMS, sample-and-hold systems, signal multiplexing, integrators, programmable operational amplifiers, programmable voltage regulators, crosspoint switching networks, logic interface, and many other analog systems.


The TL601 is an SPDT switch with two logic control inputs. The TL604 is a dual complementary SPST switch with a single control input. The TL607 is an SPDT switch with one logic control input and one enable input. The TL610 is an SPST switch with three logic control inputs. The TL610 features a higher r_{off}/r_{on} ratio than the other members of the family.

The TL601C, TL604C, TL607C, and TL610C are characterized for operation from 0°C to 70°C , the TL601I, TL604I, TL607I, and TL610I are characterized for operation from -25°C to 85°C , and the TL601M, TL604M, TL607M, and TL610M are characterized for operation over the full military temperature range of -55°C to 125°C .

JG OR P PACKAGE (TOP VIEW)



schematics of inputs and outputs

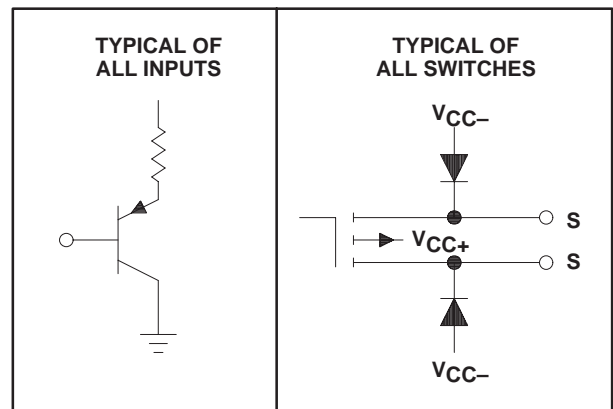

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1986, Texas Instruments Incorporated

TL601, TL604, TL607, TL610 P-MOS ANALOG SWITCHES


D2161, JUNE 1976 — REVISED OCTOBER 1986

logic symbols† and switch diagrams

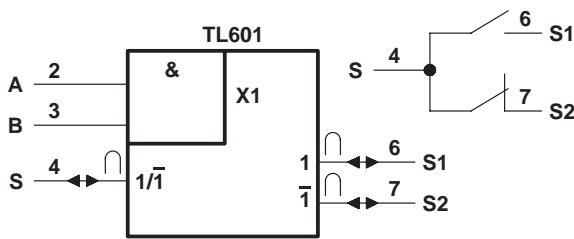


FUNCTION TABLE

| INPUTS | | ANALOG SWITCHES | |
|--------|---|-----------------|-------------|
| A | B | S1 | S2 |
| L | X | Off (open) | On (closed) |
| X | L | Off (open) | On (closed) |
| H | H | On (closed) | Off (open) |

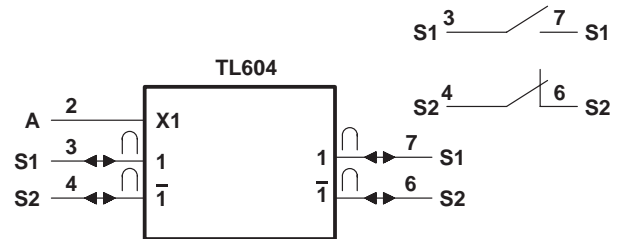


FUNCTION TABLE

| INPUT | ANALOG SWITCHES | |
|-------|-----------------|-------------|
| A | S1 | S2 |
| H | On (closed) | Off (open) |
| L | Off (open) | On (closed) |

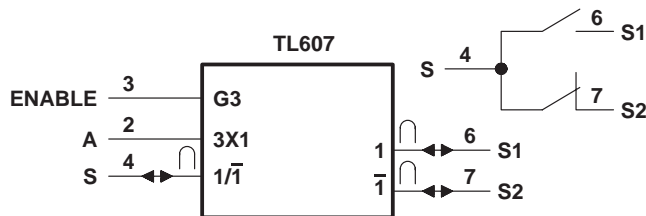

FUNCTION TABLE

| INPUTS | | ANALOG SWITCHES | |
|--------|--------|-----------------|-------------|
| A | ENABLE | S1 | S2 |
| X | L | Off (open) | Off (open) |
| L | H | Off (open) | On (closed) |
| H | H | On (closed) | Off (open) |

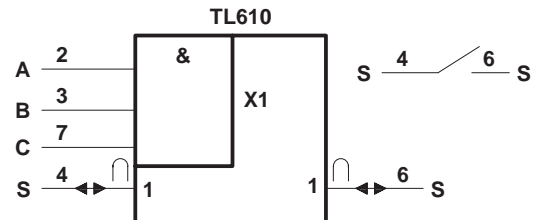


FUNCTION TABLE

| INPUTS | | | ANALOG SWITCHES |
|--------|---|---|-----------------|
| A | B | C | S |
| L | X | X | Off (open) |
| X | L | X | Off (open) |
| X | X | L | Off (open) |
| X | H | H | On (closed) |

† These symbols are in accordance with ANSI/IEEE Std 91-1984.

TL607 logic diagram (positive logic)

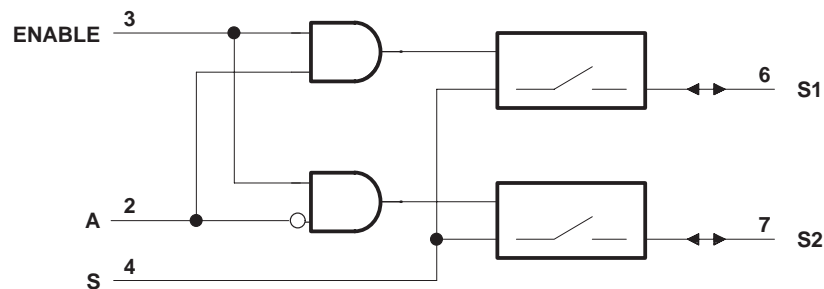

TL601, TL604, TL607, TL610 P-MOS ANALOG SWITCHES

D2161, JUNE 1976 — REVISED OCTOBER 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|----------------|
| Supply voltage, V_{CC+} (see Note 1) | 30 V |
| Supply voltage, V_{CC-} | -30 V |
| V_{CC+} to V_{CC-} supply voltage differential | 35 V |
| Control input voltage | V_{CC+} |
| Switch off-state voltage | 30 V |
| Switch on-state current | 10 mA |
| Operating free-air temperature range: | |
| TL601C, TL604C, TL607C, TL610C | 0°C to 70°C |
| TL601I, TL604I, TL607I, TL610I | -25°C to 85°C |
| TL601M, TL604M, TL607M, TL610M | -55°C to 125°C |
| Storage temperature range | -65°C to 150°C |
| Lead temperature (1,6 mm) 1/16 inch from case for 60 seconds: JG package | 300°C |
| Lead temperature (1,6 mm) 1/16 inch from case for 10 seconds: P package | 260°C |

NOTE 1: All voltage values are with respect to network ground terminal.

recommended operating conditions

| | TL601C, TL604C TL607C, TL610C | | | TL601I, TL604I TL607I, TL610I | | | TL601M, TL604M TL607M, TL610M | | | UNIT |
|--|----------------------------------|-----|-----------|----------------------------------|-----|-----------|----------------------------------|-----|-----------|------|
| | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| Supply voltage, V_{CC+} (see Figure 1) | 5 | 10 | 25 | 5 | 10 | 25 | 5 | 10 | 25 | V |
| Supply voltage, V_{CC-} (see Figure 1) | -5 | -20 | -25 | -5 | -20 | -25 | -5 | -20 | -25 | V |
| V_{CC+} to V_{CC-} supply voltage differential (see Figure 1) | 15 | | 30 | 15 | | 30 | 15 | | 30 | V |
| High-level control input voltage, V_{IH} | 2 | | 5.5 | 2 | | 5.5 | 2 | | 5.5 | V |
| Low-level control input voltage, V_{IL} | All inputs | | | 0.8 | | | 0.8 | | | |
| Voltage at any analog switch (S) terminal | $V_{CC-} + 8$ | | V_{CC+} | $V_{CC-} + 8$ | | V_{CC+} | $V_{CC-} + 8$ | | V_{CC+} | V |
| Switch on-state current | 10 | | | 10 | | | 10 | | | mA |
| Operating free-air temperature, T_A | 0 | | 70 | 25 | | 85 | -55 | | 125 | °C |



TL601, TL604, TL607, TL610 P-MOS ANALOG SWITCHES

D2161, JUNE 1976 — REVISED OCTOBER 1986

electrical characteristics over recommended operating free-air temperature range, $V_{CC+} = 10\text{ V}$, $V_{CC-} = -20\text{ V}$, analog switch test current = 1 mA (unless otherwise noted)

| PARAMETER | TEST CONDITIONS† | TL6 __ C | | | TL6 __ M TL6 __ I | | | UNIT | |
|--|--|----------------------------|----------------|-------|----------------------|------|------------------|----------------|-------------|
| | | MIN | TYP‡ | MAX | MIN | TYP‡ | MAX | | |
| I_{IH} High-level input current | $V_I = 5.5\text{ V}$ | | 0.5 | 10 | | 0.5 | 10 | μA | |
| I_{IL} Low-level input current | $V_I = 0.4\text{ V}$ | | -50 | -250 | | -50 | -250 | μA | |
| I_{off} Switch off-state current | $V_{I(sw)} = -10\text{ V}$, See Note 2 | $T_A = 25^\circ\text{C}$ | | -500 | | -400 | | ρA | |
| | | $T_A = \text{MAX}^\dagger$ | | -10 | -20 | | -50 | -100 | nA |
| r_{on} Switch on-state resistance | $V_{I(sw)} = 10\text{ V}$, $I_{O(sw)} = -1\text{ mA}$ | TL601 TL604 TL607 | | 75 | 200 | | 55 | 100 | Ω |
| | | TL610 | | 40 | 100 | | 40 | 80 | |
| | $V_{I(sw)} = -10\text{ V}$, $I_{O(sw)} = -1\text{ mA}$ | TL601 TL604 TL607 | | 220 | 600 | | 220 | 400 | |
| | | TL610 | | 120 | 300 | | 120 | 300 | |
| r_{off} Switch off-state resistance | | | 20 | | 20 | | $\text{G}\Omega$ | | |
| C_{on} Switch on-state input capacitance | $V_{I(sw)} = 0\text{ V}$, $f = 1\text{ MHz}$ | | 16 | | 16 | | pF | | |
| C_{off} Switch off-state input capacitance | $V_{I(sw)} = 0\text{ V}$, $f = 1\text{ MHz}$ | | 8 | | 8 | | pF | | |
| I_{CC+} Supply current from V_{CC+} | Logic input(s) at 5.5 V, All switch terminals open | | TL601 TL604 | 5 | 10 | | 5 | 10 | mA |
| | | ENABLE high | | 5 | 10 | | 5 | 10 | |
| | | ENABLE low | TL607 | 3 | 5 | | 3 | 5 | |
| | | | TL610 | 5 | 10 | | 5 | 10 | |
| I_{CC-} Supply current from V_{CC-} | Logic input(s) at 5.5 V, All switch terminals open | | TL601 TL604 | -1.2 | -2.5 | | -1.2 | -2.5 | mA |
| | | ENABLE high | | -2.5 | -5 | | -2.5 | -5 | |
| | | ENABLE low | TL607 | -0.05 | -0.5 | | -0.05 | -0.5 | |
| | | | TL610 | -1.2 | -2.5 | | -1.2 | -2.5 | |

† MAX is 70°C for C-suffix types, 85°C for I-suffix types, and 125°C for M-suffix types.

‡ All typical values are at $T_A = 25^\circ\text{C}$ except for I_{off} at $T_A = \text{MAX}$.

NOTE 2: The other terminal of the switch under test is at $V_{CC+} = 10\text{ V}$.

switching characteristics, $V_{CC+} = 10\text{ V}$, $V_{CC-} = -20\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------|--|-----|-----|-----|-------------|
| t_{off} Switch turn-off time | $R_L = 1\text{ k}\Omega$, $C_L = 35\text{ pF}$, See Figure 2 | | 400 | 500 | ns |
| t_{on} Switch turn-on time | | | 100 | 150 | |



PARAMETER MEASUREMENT INFORMATION

Figure 1 shows power supply boundary conditions for proper operation of the TL601 Series. The range of operation for supply V_{CC+} from 5 V to 25 V is shown on the vertical axis. The range of V_{CC-} from -5 V to -25 V is shown on the horizontal axis. A recommended 30-V maximum voltage differential from V_{CC+} to V_{CC-} governs the maximum V_{CC+} for a chosen V_{CC-} (or vice versa). A minimum recommended difference of 15 V from V_{CC+} to V_{CC-} and the boundaries shown in Figure 1 allow the designer to select the proper combinations of the two supplies.

The designer-selected V_{CC+} supply value for a chosen V_{CC-} supply value limits the maximum input voltage that can be applied to either switch terminal; that is, the input voltage should be between $V_{CC-} + 8$ V and V_{CC+} to keep the on-state resistance within specified limits.



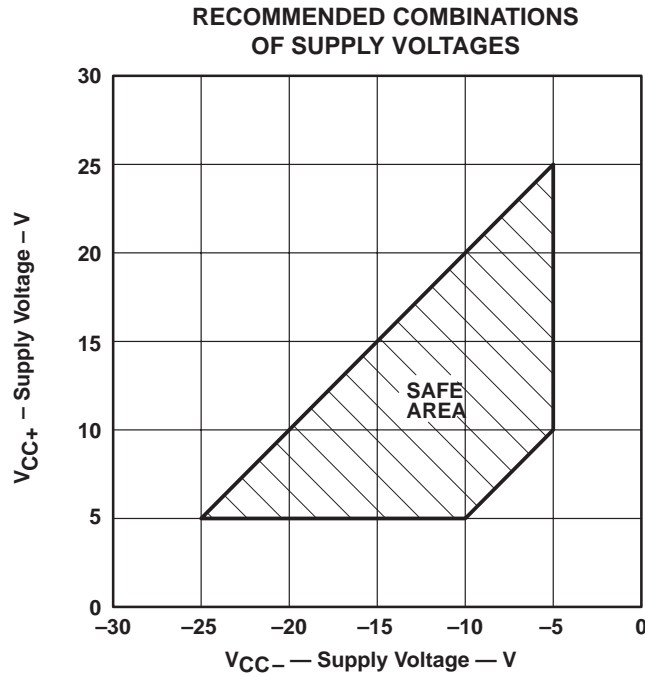


Figure 1

TL601, TL604, TL607, TL610 P-MOS ANALOG SWITCHES

D2161, JUNE 1976 — REVISED OCTOBER 1986

PARAMETER MEASUREMENT INFORMATION

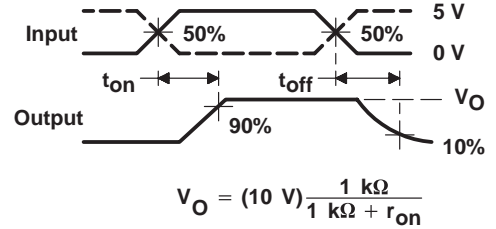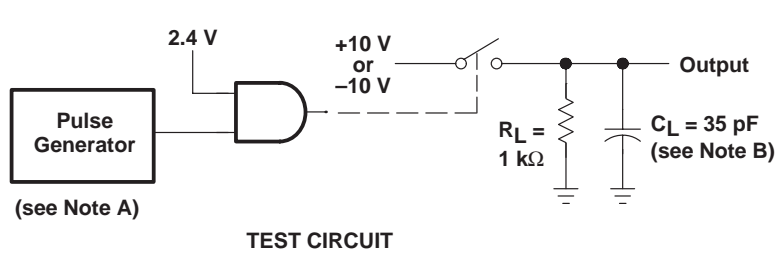

NOTES: A. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, $t_r \geq 15 \text{ ns}$, $t_f \geq 15 \text{ ns}$, $t_w = 500 \text{ ns}$.
B. C_L includes probe and jig capacitance.

Figure 2

TYPICAL CHARACTERISTICS

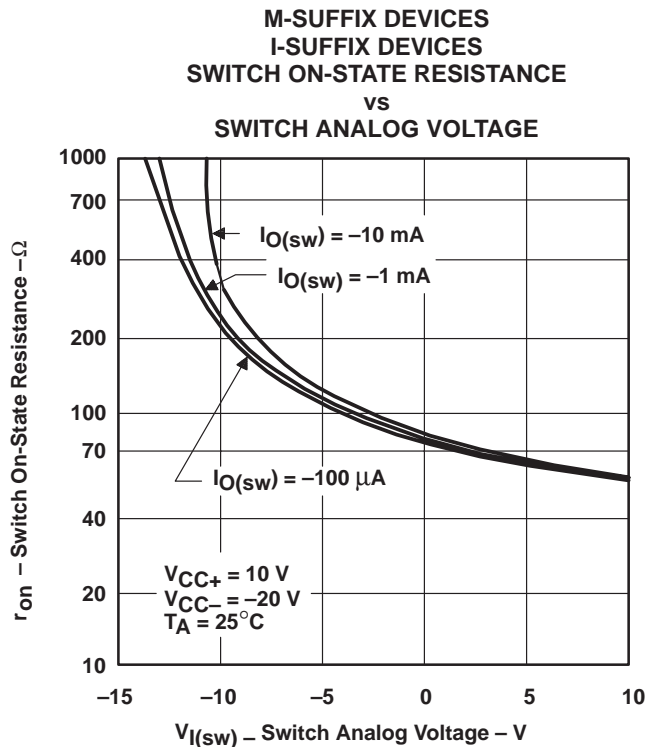


Figure 3

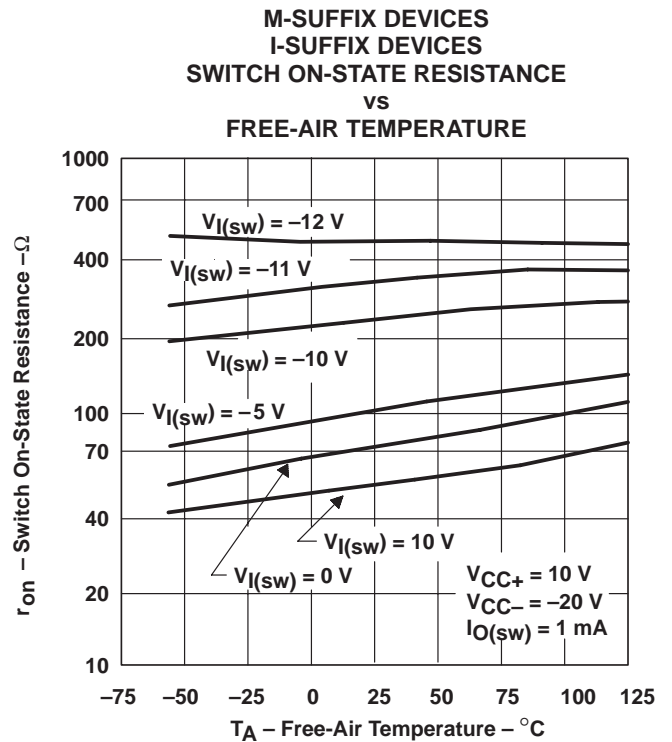


Figure 4

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.