



FEATURES

- OUTPUT CURRENT UP TO 15A
- 4:1 WIDE INPUT VOLTAGE RANGE
- HIGH EFFICIENCY UP TO 90%
- NO MINIMUM LOAD
- SOFT-START
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- INPUT REVERSE PROTECTION
- INDUSTRY STANDARD HALF-BRICK FOOTPRINT
- SIX-SIDED CONTINUOUS SHIELD
- INPUT TO OUTPUT BASIC INSULATION
- BUS TERMINAL BLOCK OPTION

OPTIONS

- Positive logic remote ON/OFF
- Terminal block
- Pin length
- Heat-sink

DESCRIPTION

HAE75W-SERIES DC/DC converters provide up to 75 watts of output power in an industry standard half-brick package and footprint. All models feature a wide input range, adjustable output voltage and a 15A current rating.

APPLICATIONS

- Wireless Network
- Telecom/Datacom
- Industry Control System
- Distributed Power Architectures
- Semiconductor Equipment

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		75 Watts, max.
Voltage accuracy	Full load and Vin, nom	±1%
Voltage adjustability (Note 7)		+10%, -20%
Minimum load		0%
Line regulation	LL to HL at FL	See table
Load regulation	No Load to Full Load	See table
Remote sense (Note 8)		10% of Vout, nom.
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02%/°C, max.
Transient response recovery time	25% load step change	200µs
Over voltage protection threshold	(Hiccup) 115% ~ 130% of Vout, nom.	
Over current protection threshold		110% ~ 140% of Iout Rated
Short circuit protection		Hiccup, automatics recovery
INPUT SPECIFICATIONS		
Input voltage range	24V nominal input	9 – 36VDC
	48V nominal input	18 – 75VDC
Start-up voltage	24V nominal input	8.5V, typ.
	48V nominal input	17.5V, typ.
Shutdown voltage	24V nominal input	7.5V, typ.
	48V nominal input	16V, typ.
Input filter		Pi type
Input surge voltage 100mS max.	24V nominal input	50VDC
	48V nominal input	100VDC
Input reverse protection (Note 9)		Parallel diode
Start up time	Vin, nom and constant resistive load	Power up 25mS, typ.
		Remote ON/OFF 25mS, typ.
Remote ON/OFF (Note 6) (Negative logic) (Standard)	DC-DC ON	Short or 0V < Vr < 1.2V
	DC-DC OFF	Open or 3V < Vr < 12V
	DC-DC ON	Open or 3V < Vr < 12V
	DC-DC OFF	Short or 0V < Vr < 1.2V
(Positive logic) (Option)	Input current of Remote control pin	Vin(nom) -0.5mA ~ 1mA
	Remote off input current	Vin(nom) 3mA

GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output (Basic insulation)	2250 VDC, min.
	Input (Output) to Case	1600 VDC, min.
Isolation resistance		10 ⁹ ohms, min.
Isolation capacitance		2500pF, max.
Switching frequency		300KHz, typ.
Design meet safety standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Metal
Base material		FR4 PCB
Potting material		Silicon (UL94-V0)
Dimensions		2.40 X 2.28 X 0.50 Inches (61.0x57.9x12.7 mm)
Weight		97g (3.42oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	1.010 x 10 ⁶ hrs
	MIL-HDBK-217F	7.416 x 10 ⁴ hrs

ENVIRONMENTAL SPECIFICATIONS		
Operating ambient temperature (Note10) (For 5, 12, 15Vout)	Without Heat-sink	-40°C ~ +35°C (without derating) +35°C ~ +84°C (with derating)
	With Heat-sink (0.24" Height)	-40°C ~ +49°C (without derating) +49°C ~ +88°C (with derating)
	Without Heat-sink	-40°C ~ +28°C (without derating) +28°C ~ +76°C (with derating)
Operating ambient temperature (Note10) (For 24, 28, 48Vout)	With Heat-sink (0.24" Height)	-40°C ~ +43°C (without derating) +43°C ~ +82°C (with derating)
	Maximum case temperature	105°C
Over temperature protection		115°C
Storage temperature range		-55°C to +125°C
Thermal impedance (Note 11)	without Heat-sink	6.7°C/watt
	with 0.24" Height Heat-sink	5.4°C/watt
	with 0.45" Height Heat-sink	4.7°C/watt
Thermal shock		MIL-STD-810F
Vibration		MIL-STD-810F
Relative humidity		5% to 95% RH

EMC CHARACTERISTICS		
EMI (Note 12)	EN55022	Class A
ESD	EN61000-4-2	Air Contact ± 8KV Perf. Criteria A
		± 6KV Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transient (Note 13)	EN61000-4-4	± 2KV Perf. Criteria A
Surge (Note 13)	EN61000-4-5	± 1KV Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A







Model Number	Input Range	Output Voltage	Output Current		Line Regulation	Load Regulation	Output ⁽⁴⁾⁽⁵⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)
			Min. load	Full load				No Load ⁽³⁾	Full Load ⁽²⁾	
HAE75-24S05W	9 – 36 VDC	5 VDC	0mA	15 A	10mV	15mV	75mVp-p	185mA	3.613 A	88
HAE75-24S12W	9 – 36 VDC	12 VDC	0mA	6.3 A	24mV	30mV	100mVp-p	185mA	3.642 A	88
HAE75-24S15W	9 – 36 VDC	15 VDC	0mA	5 A	30mV	38mV	100mVp-p	185mA	3.613 A	88
HAE75-24S24W	9 – 36 VDC	24 VDC	0mA	3.2 A	48mV	48mV	200mVp-p	85mA	3.743 A	87
HAE75-24S28W	9 – 36 VDC	28 VDC	0mA	2.7 A	56mV	56mV	200mVp-p	85mA	3.684 A	87
HAE75-24S48W	9 – 36 VDC	48 VDC	0mA	1.6 A	96mV	72mV	300mVp-p	85mA	3.743 A	87
HAE75-48S05W	18 – 75 VDC	5 VDC	0mA	15 A	10mV	15mV	75mVp-p	90mA	1.766 A	90
HAE75-48S12W	18 – 75 VDC	12 VDC	0mA	6.3 A	24mV	30mV	100mVp-p	90mA	1.800 A	89
HAE75-48S15W	18 – 75 VDC	15 VDC	0mA	5 A	30mV	38mV	100mVp-p	90mA	1.786 A	89
HAE75-48S24W	18 – 75 VDC	24 VDC	0mA	3.2 A	48mV	48mV	200mVp-p	50mA	1.871 A	87
HAE75-48S28W	18 – 75 VDC	28 VDC	0mA	2.7 A	56mV	56mV	200mVp-p	50mA	1.842 A	87
HAE75-48S48W	18 – 75 VDC	48 VDC	0mA	1.6 A	96mV	72mV	300mVp-p	50mA	1.871 A	87

- Note**
- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25°C, Full load(Ground, Benign, controlled environment).
 - Maximum value at nominal input voltage and full load.
 - Typical value at nominal input voltage and no load.
 - Typical value at nominal input voltage and full load.
 - The ripple and noise of output voltage 48V is measured with a 2.2µF/100V X7R MLCC;
The ripple and noise of other output voltage is measured with a 4.7µF/50V X7R MLCC.
 - The remote ON/OFF control pin voltage is referenced to -Vin. The positive logic and pin length are optional.
To order positive logic ON-OFF control add the suffix -P (Ex: HAE75-48S05W-P).
 - Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting a single resistor between TRIM and +SENSE pins for trim up or between TRIM and -SENSE pins for trim down. To calculate the value of the resistor Ru and Rd for a particular output voltage uses the following equation:

$$R_U = \left(\frac{V_{OUT}(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) K\Omega$$

$$R_D = \left(\frac{100}{\Delta\%} - 2 \right) K\Omega$$
 - Maximum output deviation is +10% inclusive of remote sense. If remote sense is not being used, the +SENSE should be connected to its corresponding +OUTPUT and likewise the -SENSE should be connected to its corresponding -OUTPUT.
 - Internal fusing is not included, so we suggest to use an input line fuse.
 - Test condition with vertical direction by natural convection (20LFM).
 - Heat sink is optional and P/N: 7G-0021A-F, 7G-0022A-F, 7G-0023A-F, 7G-0024A-F.
 - The HAE75W series meets EN55022 Class A only with external components connected before the input pin to the converter.
 - An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF /100V, ESR 48mΩ.
 - CASE GROUNDING : When you connect the case pin and the four screw bolts to ground, the EMI could be better reduced.

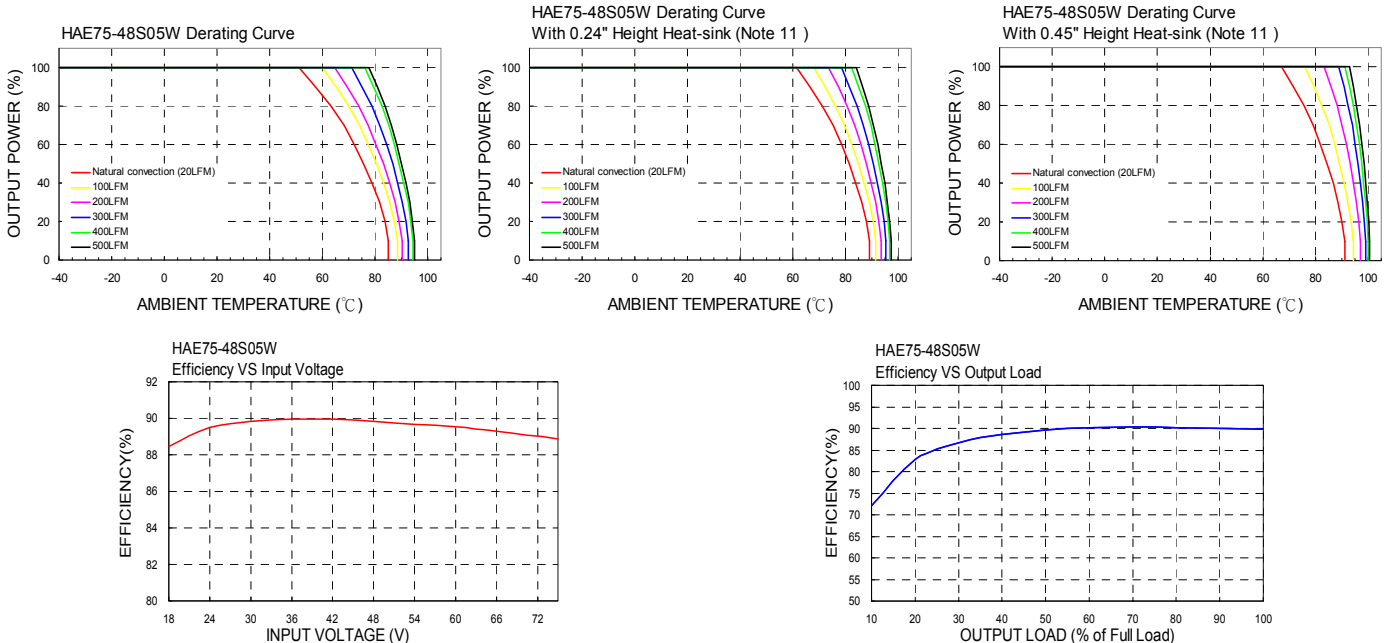


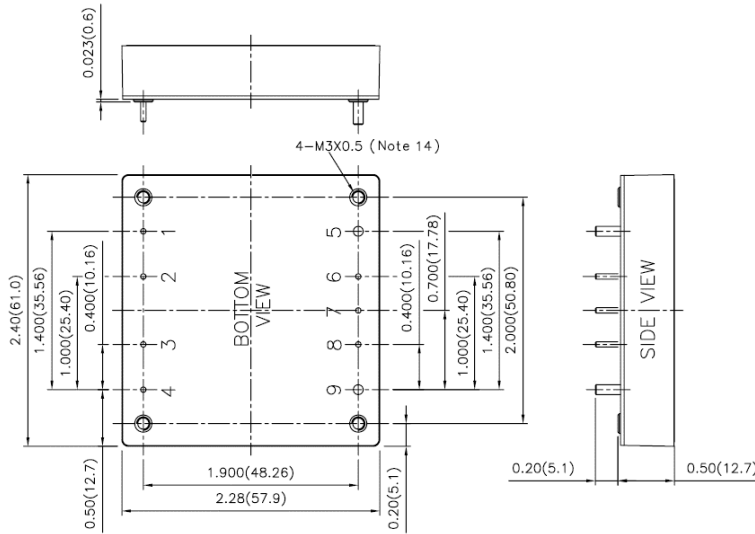


Pin 1,2,3,4,6,7,8. DIA. 0.040 (1.02mm)
Pin 5,9. DIA. 0.080 (2.03mm)
All dimensions in inches (mm)
Tolerance :x.xx±0.02 (x.xx±0.5)
 x.xxx±0.01 (x.xx±0.25)
Pin pitch tolerance ±0.01 (0.25)
Pin dimension tolerance ±0.004(0.1)

PRODUCT OPTIONS TABLE	
Option	Suffix
Negative remote ON/OFF logic 0.20" pin length (standard)	-
Negative remote ON/OFF logic 0.145" pin length	-L
Negative remote ON/OFF logic 0.11" pin length	-K
Positive remote ON/OFF logic 0.20" pin length	-P
Positive remote ON/OFF logic 0.145" pin length	-S
Positive remote ON/OFF logic 0.11" pin length	-M


PIN CONNECTION		
PIN	Define	Diameter
1	- INPUT	0.04 Inches
2	CASE	0.04 Inches
3	CTRL	0.04 Inches
4	+ INPUT	0.04 Inches
5	- OUTPUT	0.08 Inches
6	- SENSE	0.04 Inches
7	TRIM	0.04 Inches
8	+ SENSE	0.04 Inches
9	+ OUTPUT	0.08 Inches

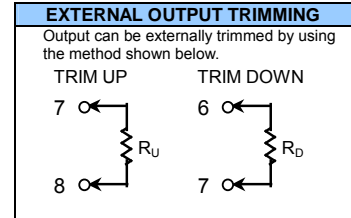

Vertical Fin Orientation



Horizontal Fin Orientation



FIN ORIENTATION		P / N
Vertical	H=0.240(6.10)	7G-0023A-F
	H=0.450(11.43)	7G-0021A-F
Horizontal	H=0.240(6.10)	7G-0022A-F
	H=0.450(11.43)	7G-0024A-F

Option : Terminal Block (Suffix-T)

