



# N-Channel 60-V (D-S) MOSFET

## TrenchFET MOSFET



**ESD Protected  
2000 V**

PRODUCT SUMMARY			
$V_{(BR)DSS(min)}$ (V)	$r_{DS(on)}$ ( $\Omega$ )	$V_{GS(th)}$ (V)	$I_D$ (mA)
60	1.25 @ $V_{GS} = 10$ V	1 to 2.5	330

### FEATURES


- Low On-Resistance: 1.25  $\Omega$
- Low Threshold: 2.5 V
- Low Input Capacitance: 30 pF
- Fast Switching Speed: 25 ns
- Low Input and Output Leakage
- Miniature Package

### BENEFITS

- Low Offset Voltage
- Low-Voltage Operation
- High-Speed Circuits
- Low Error Voltage
- Small Board Area

### APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays



Marking Code: E

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	
Continuous Drain Current <sup>a</sup>	$I_D$	$T_A = 25^\circ\text{C}$	330
		$T_A = 85^\circ\text{C}$	240
Pulsed Drain Current <sup>a</sup>	$I_{DM}$	650	mA
Power Dissipation <sup>a</sup>	$P_D$	$T_A = 25^\circ\text{C}$	
		$T_A = 85^\circ\text{C}$	130
Thermal Resistance, Maximum Junction-to-Ambient <sup>a</sup>	$R_{thJA}$	500	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$

Notes  
c. Surface Mounted on FR4 Board, Power Applied for  $t \leq 10$  sec.

SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 10 μA	60			V
Gate-Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 0.25 mA	1		2.5	
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±10 V			±150	nA
		T <sub>J</sub> = 85 °C			±500	
		V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±5 V			±20	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 50 V, V <sub>GS</sub> = 0 V			10	μA
		T <sub>J</sub> = 85 °C			100	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 4.5 V	500			mA
		V <sub>DS</sub> = 7.5 V, V <sub>GS</sub> = 10 V	800			
Drain-Source On-Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 200 mA			3.0	Ω
		T <sub>J</sub> = 125 °C			5.0	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA			1.25	
		T <sub>J</sub> = 125 °C			2.25	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 200 mA	100			mS
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	V <sub>GS</sub> = 0 V, I <sub>S</sub> = 200 mA			1.30	V
<b>Dynamic<sup>b</sup></b>						
Input Capacitance	C <sub>iSS</sub>	V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V f = 1 MHz		30		pF
Output Capacitance	C <sub>oss</sub>			6		nC
Reverse Transfer Capacitance	C <sub>rss</sub>			2.5		
Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 250 mA V <sub>GS</sub> = 4.5 V			0.6	
<b>Switching<sup>b, c</sup></b>						
Turn-On Time	t <sub>(on)</sub>	V <sub>DD</sub> = 30 V, R <sub>L</sub> = 150 Ω I <sub>D</sub> = 200 mA, V <sub>GEN</sub> = 10 V R <sub>G</sub> = 10 Ω			25	ns
Turn-Off Time	t <sub>(off)</sub>				35	







## Notes

- Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- For DESIGN AID ONLY, not subject to production testing.
- Switching time is essentially independent of operating temperature.






TNJO60



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

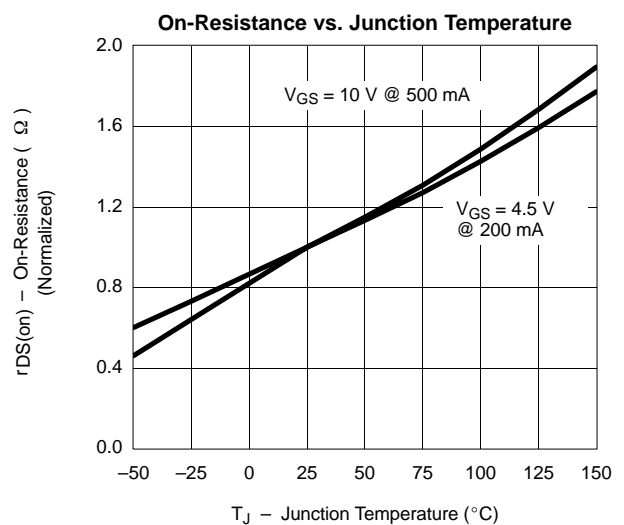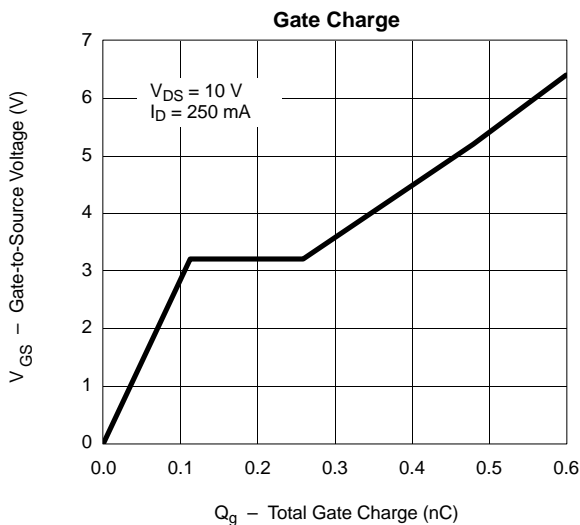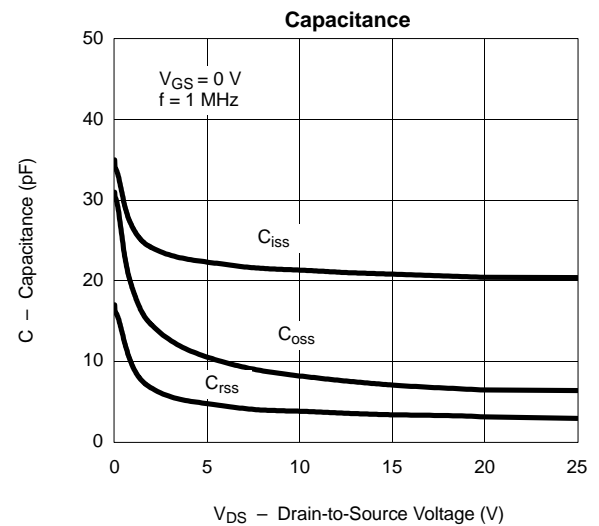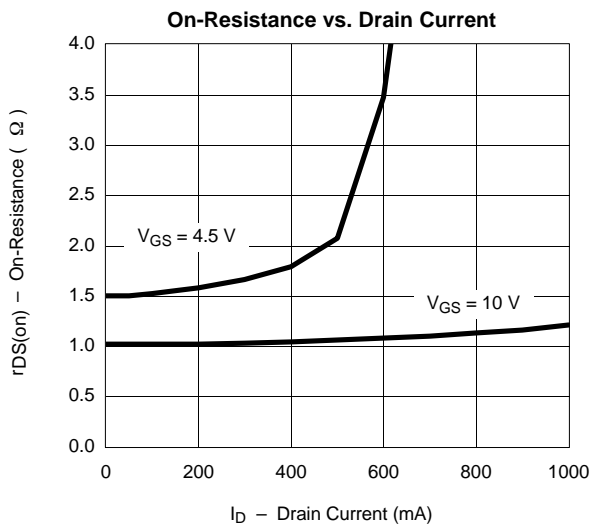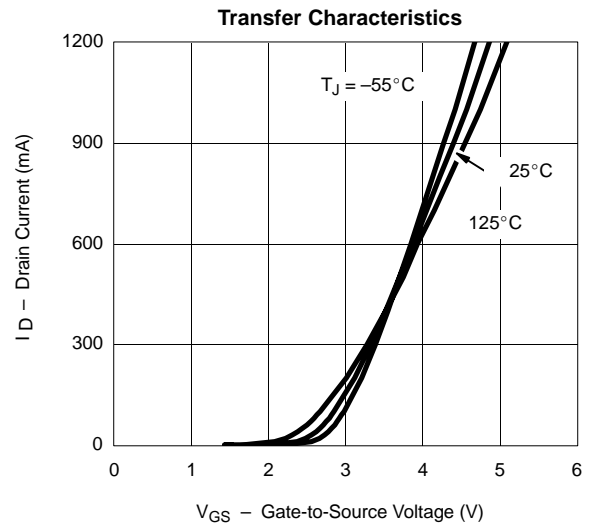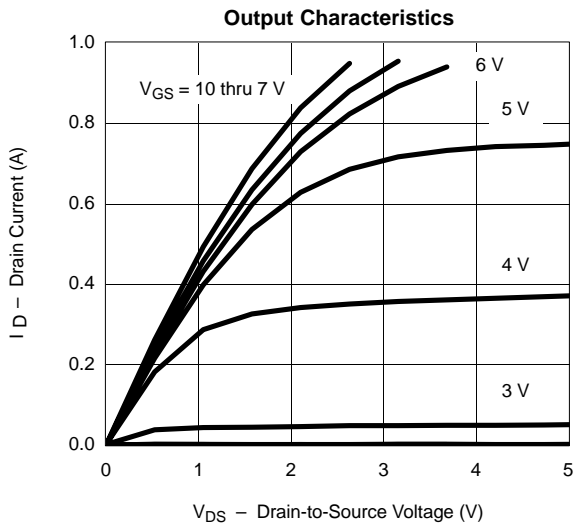

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

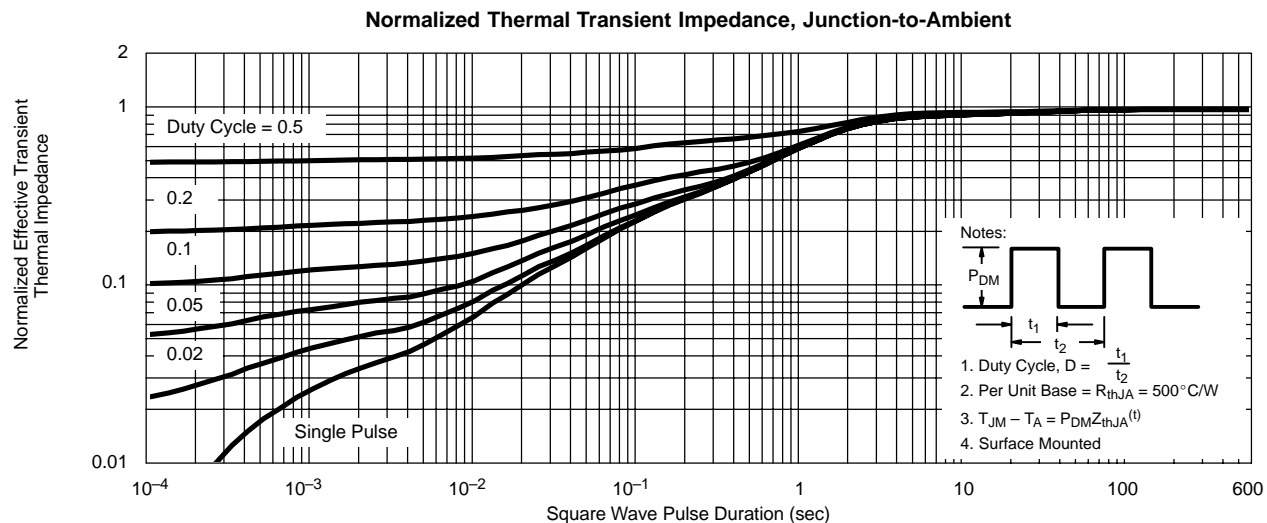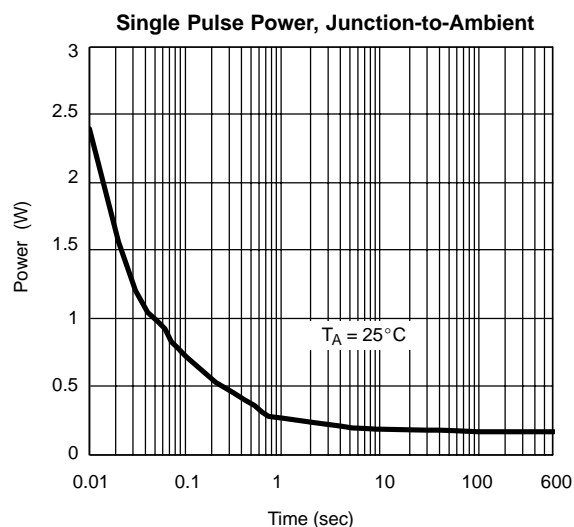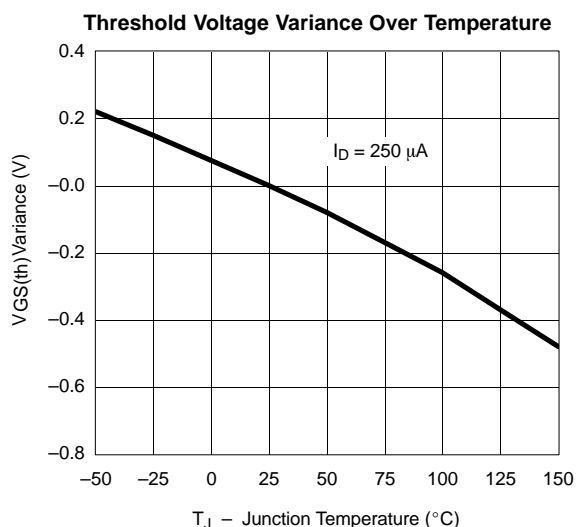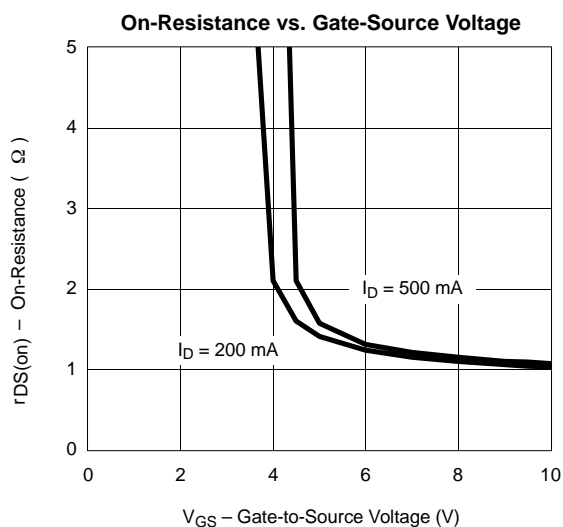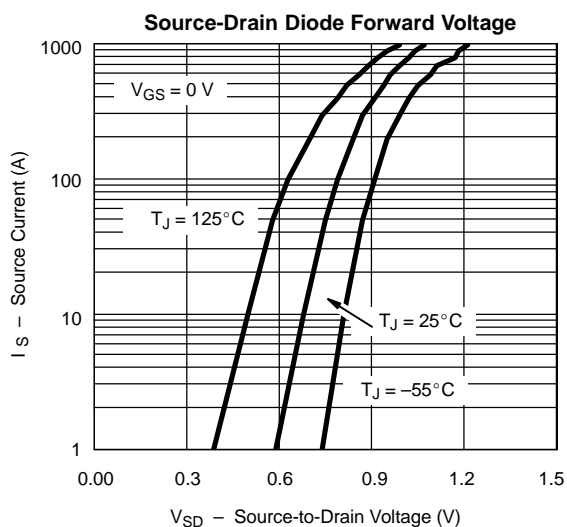



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.