



P-Channel 30-V (D-S) MOSFET


PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-30	0.053 @ $V_{GS} = -10$ V	-4.0
	0.086 @ $V_{GS} = -4.5$ V	-3.1

FEATURES

- TrenchFET® Power MOSFET

APPLICATIONS

- Load Switch
- PA Switch

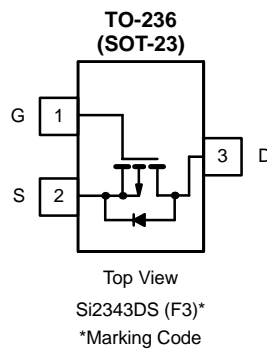

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)					
Parameter	Symbol	5 sec	Steady State	Unit	
Drain-Source Voltage	V_{DS}	-30		V	
Gate-Source Voltage	V_{GS}	± 20			
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^{a, b}	I_D	$T_A = 25^\circ\text{C}$	-4.0	-3.1	A
		$T_A = 70^\circ\text{C}$	-3.2	-2.5	
Pulsed Drain Current	I_{DM}	-15			
Continuous Source Current (Diode Conduction) ^{a, b}	I_S	-1.0	-0.6		
Maximum Power Dissipation ^{a, b}	P_D	$T_A = 25^\circ\text{C}$	1.25	0.75	W
		$T_A = 70^\circ\text{C}$	0.8	0.48	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^a	R_{thJA}	$t \leq 5$ sec	75	100	$^\circ\text{C/W}$
		Steady State	120	166	
Maximum Junction-to-Foot (Drain)	R_{thJF}	40	50		

Notes

- a. Surface Mounted on 1" x 1" FR4 Board.
- b. Pulse width limited by maximum junction temperature.

SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = -250\ \mu\text{A}$	-30			V
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	-1		-3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -24\text{ V}, V_{GS} = 0\text{ V}$			-1	μA
		$V_{DS} = -24\text{ V}, V_{GS} = 0\text{ V}, T_J = 55^\circ\text{C}$			-10	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq -5\text{ V}, V_{GS} = -10\text{ V}$	-15			A
Drain-Source On-Resistance ^a	$r_{DS(on)}$	$V_{GS} = -10\text{ V}, I_D = -4.0\text{ A}$		0.043	0.053	Ω
		$V_{GS} = -4.5\text{ V}, I_D = -3.1\text{ A}$		0.068	0.086	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -5\text{ V}, I_D = -4.0\text{ A}$		10		S
Diode Forward Voltage	V_{SD}	$I_S = -1.0\text{ A}, V_{GS} = 0\text{ V}$		0.7	-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -15\text{ V}, V_{GS} = -10\text{ V}$ $I_D \cong -4.0\text{ A}$		14	21	nC
Gate-Source Charge	Q_{gs}			1.9		
Gate-Drain Charge	Q_{gd}			3.7		
Input Capacitance	C_{iss}	$V_{DS} = -15\text{ V}, V_{GS} = 0, f = 1\text{ MHz}$		540		pF
Output Capacitance	C_{oss}			131		
Reverse Transfer Capacitance	C_{rss}			105		
Switching^c						
Turn-On Time	$t_{d(on)}$	$V_{DD} = -15\text{ V}, R_L = 15\ \Omega$ $I_D \cong -1.0\text{ A}, V_{GEN} = -10\text{ V}$ $R_G = 6\ \Omega$		10	15	ns
	t_r			15	25	
Turn-Off Time	$t_{d(off)}$			31	50	
	t_f			20	30	


Notes

- Pulse test: $PW \leq 300\ \mu\text{s}$ duty cycle $\leq 2\%$.
- For DESIGN AID ONLY, not subject to production testing.
- Switching time is essentially independent of operating temperature.




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Output Characteristics

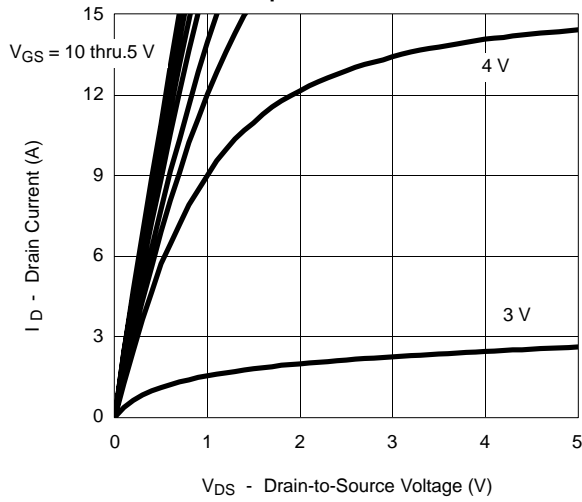


Transfer Characteristics

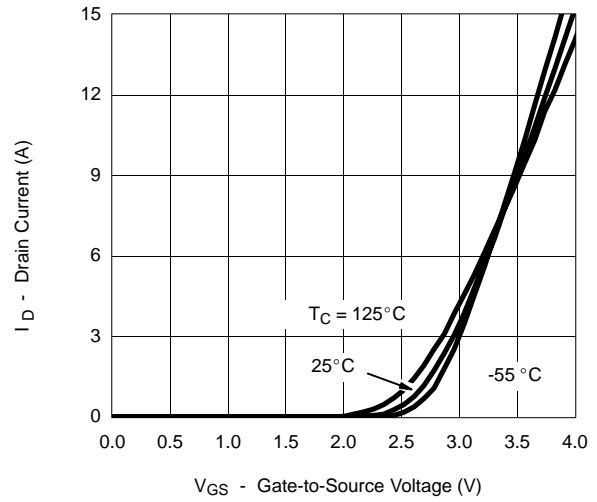


On-Resistance vs. Drain Current

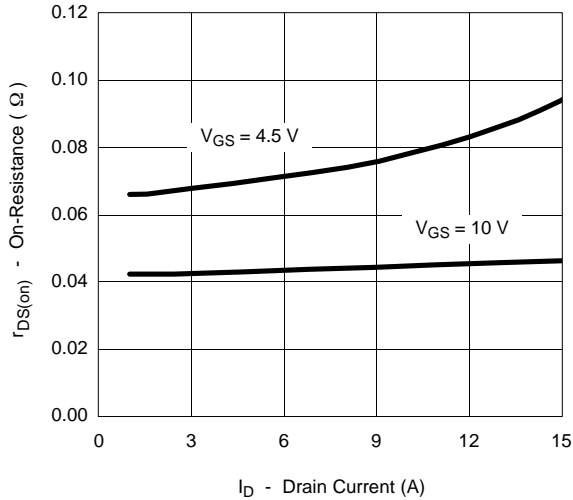


Capacitance

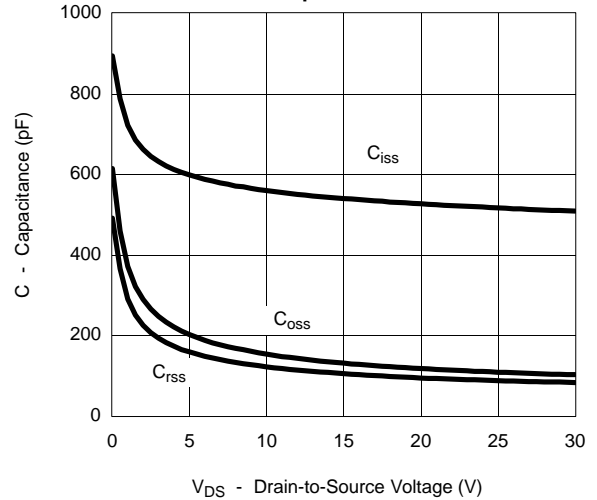

Gate Charge





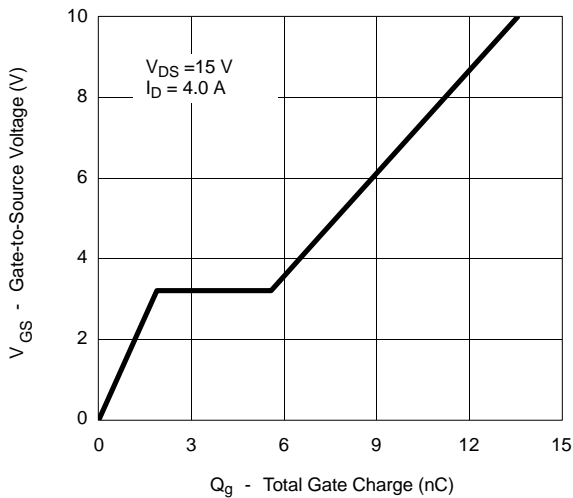


On-Resistance vs. Junction Temperature

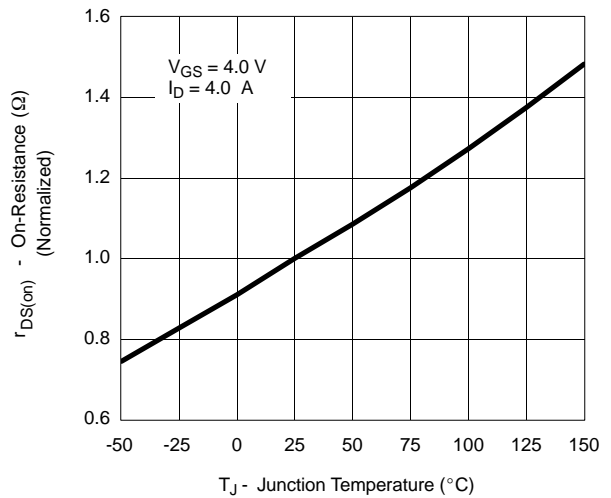




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

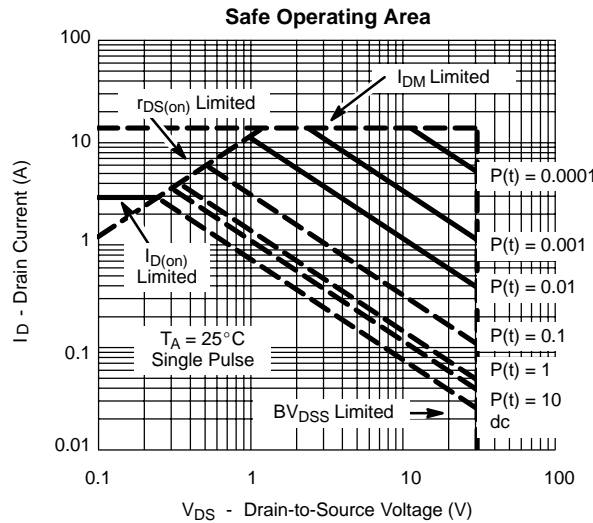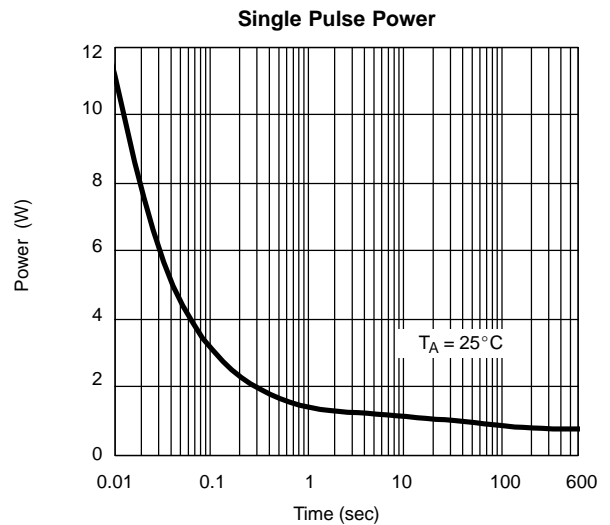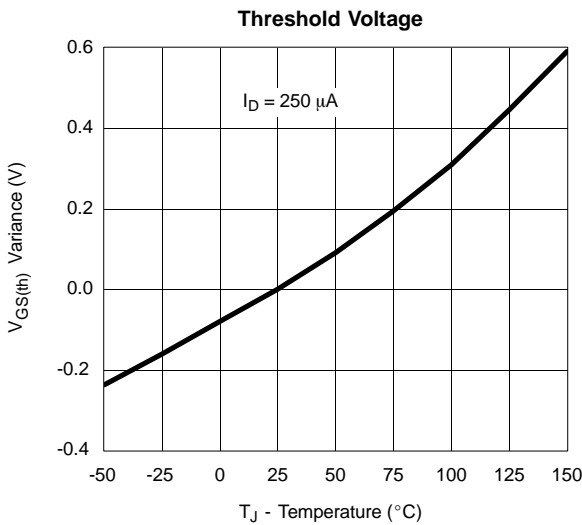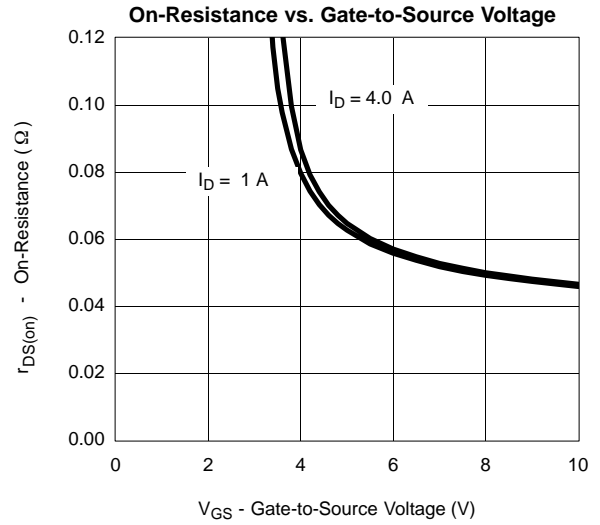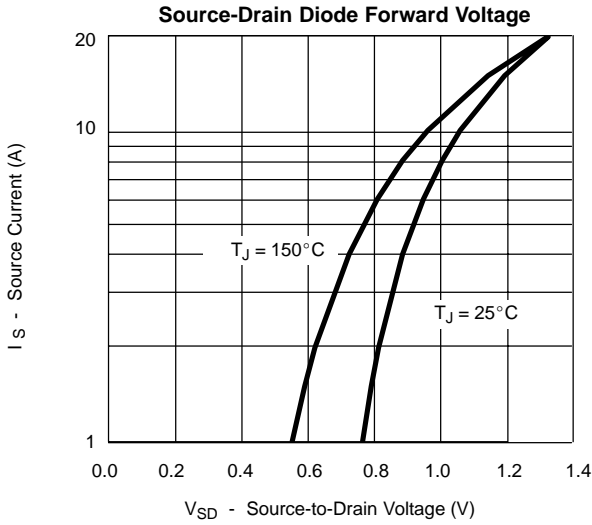



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

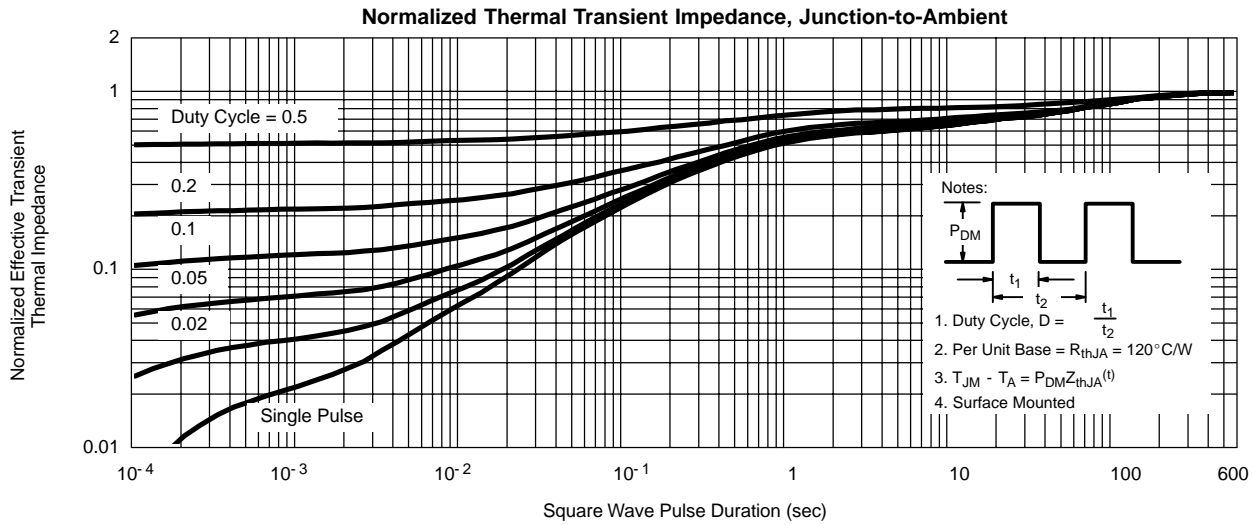



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.