

LMV654

Quad, 12 MHz, Low Voltage, Low Power Amplifier

General Description

National's LMV654 is a high performance, low power quad operational amplifier IC implemented with National's advanced VIP50 process. The LMV654 features 12 MHz of bandwidth while consuming only 119 μA of current per amplifier, which is an exceptional bandwidth to power ratio in this op amp class. The LMV654 is unity gain stable and provides an excellent solution for general purpose amplification in low voltage, low power applications.

The LMV654 provides superior performance and economy in terms of power and space usage. The LMV654 has a maximum input offset voltage of 1.8 mV, a rail-to-rail output stage and an input common-mode voltage range that includes ground. The LMV654 provides a PSRR of 95 dB, a CMRR of 100 dB and a total harmonic distortion (THD) of 0.003% at 1 kHz frequency and 600 Ω load

The LMV654 has an operating supply voltage range from 2.7V to 5.5V. The LMV654 can operate over a wide temperature range (-40°C to $+125^{\circ}\text{C}$) making the op amp ideal for automotive applications, sensor applications and portable equipment applications. The LMV654 is offered in the 14-pin TSSOP package


Features

(Typical 5V supply, unless otherwise noted)

- Guaranteed 3.0V and 5.0V performance
- High unity gain bandwidth 12 MHz
- Low power supply current 119 μA per amplifier
- Max input offset voltage 1.8 mV
- CMRR 100 dB
- PSRR 95 dB
- Input referred voltage noise 17nV/ $\sqrt{\text{Hz}}$
- Output swing with 2 k Ω load 120 mV from rail
- Total harmonic distortion 0.003% @ 1 kHz, 600 Ω
- Temperature range -40°C to 125°C


Applications

- Portable equipment
- Automotive
- Battery powered systems
- Sensors and Instrumentation

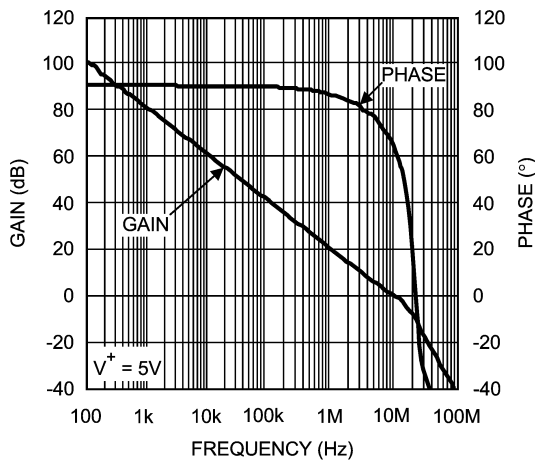

Open Loop Gain and phase vs. Frequency

20187306

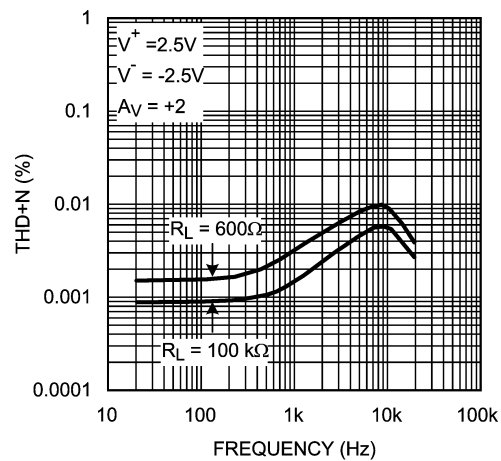

THD+N vs. Frequency

20187305

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--------------------------------------|---------------------------------|
| ESD Tolerance (Note 2) | |
| Human Body Model | 2000V |
| Machine Model | 100V |
| Differential Input V_{ID} | $\pm 0.3V$ |
| Supply Voltage ($V_S = V^+ - V^-$) | 6V |
| Input/Output Pin Voltage | $V^+ + 0.3V, V^- - 0.3V$ |
| Storage Temperature Range | $-65^\circ C$ to $+150^\circ C$ |

| | |
|-----------------------------------|----------------|
| Junction Temperature (Note 3) | $+150^\circ C$ |
| Soldering Information | |
| Infrared or Convection (20 sec) | $235^\circ C$ |
| Wave Soldering Lead Temp (10 sec) | $260^\circ C$ |

Operating Ratings (Note 1)

| | |
|--|--------------------------------|
| Temperature Range | $-40^\circ C$ to $125^\circ C$ |
| Supply Voltage | 2.7V to 5.5V |
| Package Thermal Resistance (θ_{JA})(Note 3) | |
| 14-Pin TSSOP | TBD $^\circ C/W$ |

3V DC Electrical Characteristics

Unless otherwise specified, all limits are guaranteed for $T_A = 25^\circ C$, $V^+ = 3V$, $V^- = 0V$, $V_O = V_{CM} = V^+/2$, and $R_L > 1 M\Omega$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min (Note 5) | Typ (Note 4) | Max (Note 5) | Units |
|-------------|---------------------------------|--|-----------------|-----------------|-----------------|------------------|
| V_{OS} | Input Offset Voltage | | | -0.1 | ± 1.8 | mV |
| TC V_{OS} | Input Offset Average Drift | | | 6.6 | | $\mu V/^\circ C$ |
| I_B | Input Bias Current | (Note 6) | | 80 | 120 | nA |
| I_{OS} | Input Offset Current | | | 2.2 | 15 | nA |
| CMRR | Common Mode Rejection Ratio | $0 \leq V_{CM} \leq 2.0 V$ | 87 | 100 | | dB |
| PSRR | Power Supply Rejection Ratio | $3.0 \leq V^+ \leq 5V, V_{CM} = 0.5$ | 87 | 95 | | dB |
| | | $2.7 \leq V^+ \leq 5.5V, V_{CM} = 0.5$ | 87 | 95 | | |
| CMVR | Input Common-Mode Voltage Range | CMRR ≥ 75 dB | 0 | | 2.1 | V |
| A_{VOL} | Large Signal Voltage Gain | $0.3 \leq V_O \leq 2.7, R_L = 2 k\Omega$ to $V^+/2$ | 80 | 85 | | dB |
| | | $0.3 \leq V_O \leq 2.7, R_L = 10 k\Omega$ to $V^+/2$ | 86 | 93 | | |
| V_O | Output Swing High | $R_L = 2 k\Omega$ to $V^+/2$ | | 80 | 95 | mV from rail |
| | | $R_L = 10 k\Omega$ to $V^+/2$ | | 45 | 50 | |
| | Output Swing Low | $R_L = 2 k\Omega$ to $V^+/2$ | | 95 | 110 | |
| | | $R_L = 10 k\Omega$ to $V^+/2$ | | 60 | 65 | |
| I_{SC} | Output Short Circuit Current | Sourcing to $V^+/2$ $V_{ID} = 100$ mV (Note 8) | 14 | 17 | | mA |
| | | Sinking from $V^+/2$ $V_{ID} = -100$ mV (Note 8) | 45 | 50 | | |
| I_S | Supply Current per Amplifier | | | 119 | | μA |
| SR | Slew Rate | $A_V = +1$, 10% to 90% (Note 7) | | 3.3 | | V/ μs |
| GBW | Gain Bandwidth Product | | | 12 | | MHz |
| e_n | Input-Referred Voltage Noise | $f = 100$ kHz | | 17 | | nV/ \sqrt{Hz} |
| | | $f = 1$ kHz | | 17 | | |
| i_n | Input-Referred Current Noise | $f = 100$ kHz | | 0.15 | | pA/ \sqrt{Hz} |
| | | $f = 1$ kHz | | 0.1 | | |
| THD | Total Harmonic Distortion | $f = 1$ kHz, $A_V = 2$, $R_L = 600\Omega$ | | 0.003 | | % |

5V DC Electrical Characteristics

Unless otherwise specified, all limits are guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_O = V_{CM} = V^+/2$, and $R_L > 1\text{ M}\Omega$. **Bold-face** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min (Note 5) | Typ (Note 4) | Max (Note 5) | Units |
|-------------|---------------------------------|--|-----------------|-----------------|-----------------|------------------------------|
| V_{OS} | Input Offset Voltage | | | -0.1 | ± 1.8 | mV |
| $TC V_{OS}$ | Input Offset Average Drift | | | 6.6 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | (Note 6) | | 80 | 120 | nA |
| I_{OS} | Input Offset Current | | | 2.2 | 15 | nA |
| CMRR | Common Mode Rejection Ratio | $0 \leq V_{CM} \leq 4.0\text{ V}$ | 90 | 100 | | dB |
| PSRR | Power Supply Rejection Ratio | $3\text{V} \leq V^+ \leq 5\text{V}$, $V_{CM} = 0.5\text{V}$ | 87 | 95 | | dB |
| | | $2.7\text{V} \leq V^+ \leq 5.5\text{V}$, $V_{CM} = 0.5\text{V}$ | 87 | 95 | | |
| CMVR | Input Common-Mode Voltage Range | CMRR $\geq 80\text{ dB}$ | 0 | | 4.1 | V |
| A_{VOL} | Large Signal Voltage Gain | $0.3 \leq V_O \leq 4.7\text{V}$, $R_L = 2\text{ k}\Omega$ to $V^+/2$ | 79 | 84 | | dB |
| | | $0.3 \leq V_O \leq 4.7\text{V}$, $R_L = 10\text{ k}\Omega$ to $V^+/2$ | 87 | 94 | | |
| V_O | Output Swing High | $R_L = 2\text{ k}\Omega$ to $V^+/2$ | | 120 | 140 | mV from rail |
| | | $R_L = 10\text{ k}\Omega$ to $V^+/2$ | | 75 | 90 | |
| | Output Swing Low | $R_L = 2\text{ k}\Omega$ to $V^+/2$ | | 110 | 130 | |
| | | $R_L = 10\text{ k}\Omega$ to $V^+/2$ | | 70 | 80 | |
| I_{SC} | Output Short Circuit Current | Sourcing to $V^+/2$ $V_{ID} = 100\text{ mV}$ (Note 8) | 15 | 18.5 | | mA |
| | | Sinking from $V^+/2$ $V_{ID} = -100\text{ mV}$ (Note 8) | 45 | 50 | | |
| I_S | Supply Current per Amplifier | | | 119 | | μA |
| SR | Slew Rate | $A_V = +1$, $V_O = 1\text{ V}_{PP}$ 10% to 90% (Note 7) | | 3.2 | | $\text{V}/\mu\text{s}$ |
| GBW | Gain Bandwidth Product | | | 12 | | MHz |
| e_n | Input-Referred Voltage Noise | $f = 100\text{ kHz}$ | | 17 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | $f = 1\text{ kHz}$ | | 17 | | |
| i_n | Input-Referred Current Noise | $f = 100\text{ kHz}$ | | 0.1 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| | | $f = 1\text{ kHz}$ | | 0.15 | | |
| THD | Total Harmonic Distortion | $f = 1\text{ kHz}$, $A_V = 2$, $R_L = 600\Omega$ | | 0.003 | | % |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics Tables.

Note 2: Human Body Model is $1.5\text{ k}\Omega$ in series with 100 pF . Machine Model is 0Ω in series with 200 pF

Note 3: The maximum power dissipation is a function of $T_{J(\text{MAX})}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(\text{MAX})} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC board.

Note 4: Typical values represent the most likely parametric norm at the time of characterization.


Note 5: Limits are 100% production tested at 25°C . Limits over the operating temperature range are guaranteed through correlations using Statistical Quality Control (SQC) method.

Note 6: Positive current corresponds to current flowing into the device.

Note 7: Slew rate is the average of the rising and falling slew rates.

Note 8: Short circuit test is a momentary test. Continuous source or sink currents higher than 10 mA are not recommended as they might permanently disable the part.


Connection Diagram

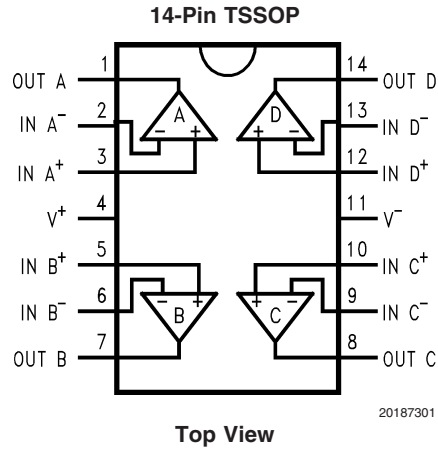

Ordering Information

| Package | Part Number | Package marking | Transport Media | NSC Drawing |
|--------------|-------------|-----------------|--------------------------|-------------|
| 14-Pin TSSOP | LMV654MT | LMV654MT | 94 Units/Rail | MTC14 |
| | LMV654MTX | | 2.5k Units Tape and Reel | |

Physical Dimensions inches (millimeters) unless otherwise noted

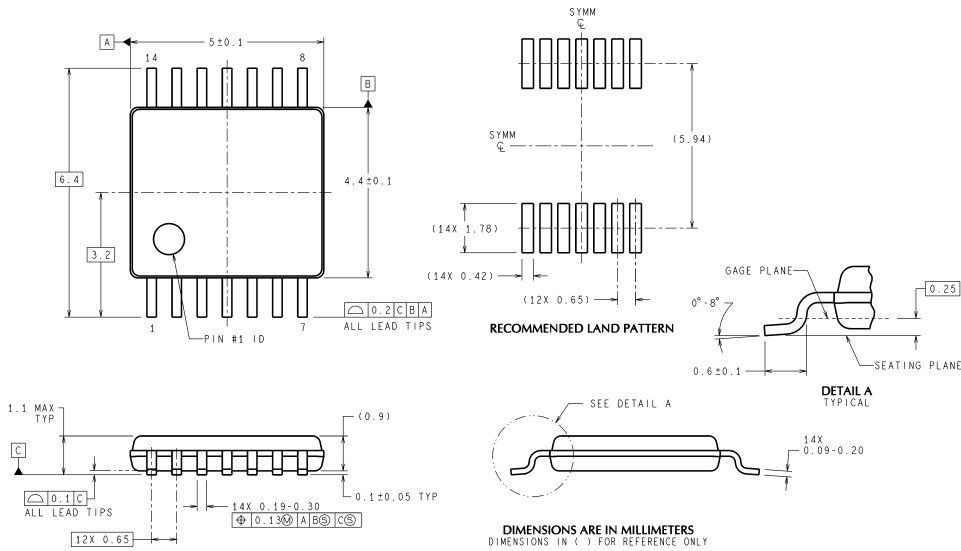

14-Pin TSSOP
NS Package Number MTC14

MTC14 (Rev D)

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



National Semiconductor
Americas Customer Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560