


**Major Ratings and Characteristics**

| Characteristics                  | 31DQ..     | Units      |
|----------------------------------|------------|------------|
| $I_{F(AV)}$ Rectangular waveform | 3.3        | A          |
| $V_{RRM}$                        | 90/100     | V          |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine | 210        | A          |
| $V_F$ @3Apk, $T_J = 25^\circ C$  | 0.85       | V          |
| $T_J$                            | -40 to 150 | $^\circ C$ |

**Description/ Features**

The 31DQ.. axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

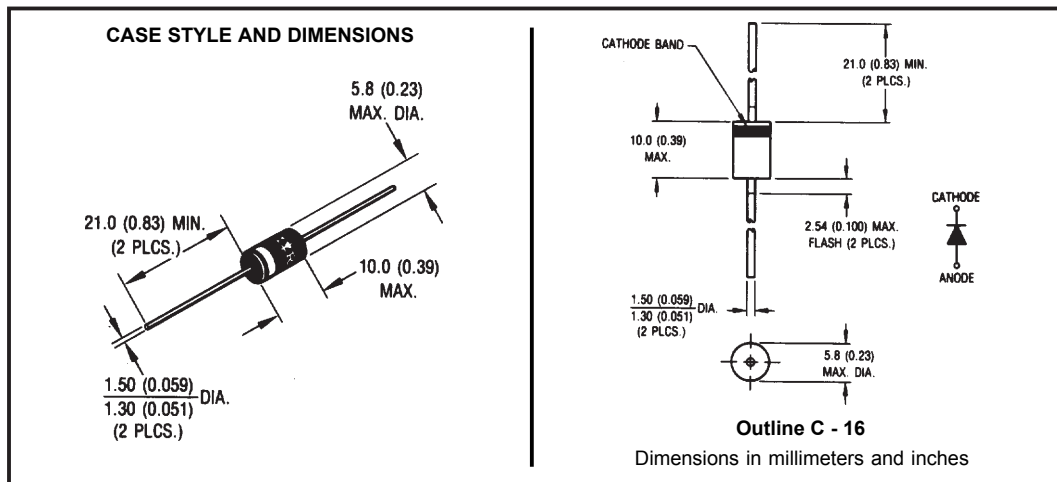

## Voltage Ratings

| Part number                                     | 31DQ09 | 31DQ10 |
|---|--------|--------|
| $V_R$ Max. DC Reverse Voltage (V)               | 90     | 100    |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |        |        |

## Absolute Maximum Ratings

| Parameters  | 31DQ.. | Units | Conditions   |
|---|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current<br>* See Fig. 4                | 3.3    | A     | 50% duty cycle @ $T_C = 53.4^\circ\text{C}$ , rectangular wave form  |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6 | 210    | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse<br>10ms Sine or 6ms Rect. pulse                                      |
|   | 34     |       |  |
| $E_{AS}$ Non-Repetitive Avalanche Energy                                | 3.0    | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 1.0$ Amps, $L = 6$ mH   |
| $I_{AR}$ Repetitive Avalanche Current                                   | 0.5    | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |

## Electrical Specifications

| Parameters  | 31DQ.. | Units            | Conditions  |
|---|--------|------------------|---|
| $V_{FM}$ Max. Forward Voltage Drop<br>* See Fig. 1 (1)    | 0.85   | V                | @ 3A  |
|   | 0.97   | V                | @ 6A  |
|   | 0.69   | V                | @ 3A  |
|   | 0.80   | V                | @ 6A  |
| $I_{RM}$ Max. Reverse Leakage Current<br>* See Fig. 2 (1) | 1      | mA               | $T_J = 25^\circ\text{C}$  |
|   | 3      | mA               | $T_J = 125^\circ\text{C}$   |
| $C_T$ Typical Junction Capacitance                        | 110    | pF               | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance                           | 9.0    | nH               | Measured lead to lead 5mm from package body                           |
| $dv/dt$ Max. Voltage Rate of Change                       | 10000  | V/ $\mu\text{s}$ | (Rated $V_R$ )  |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

## Thermal-Mechanical Specifications

| Parameters   | 31DQ..      | Units                     | Conditions                           |
|--|-------------|---------------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                  | -40 to 150  | $^\circ\text{C}$          |                                      |
| $T_{stg}$ Max. Storage Temperature Range               | -40 to 150  | $^\circ\text{C}$          |                                      |
| $R_{thJA}$ Max. Thermal Resistance Junction to Ambient | 80          | $^\circ\text{C}/\text{W}$ | DC operation<br>Without cooling fins |
| $R_{thJL}$ Typical Thermal Resistance Junction to Lead | 34          | $^\circ\text{C}/\text{W}$ | DC operation                         |
| wt Approximate Weight                                  | 1.2 (0.042) | g (oz.)                   |                                      |
| Case Style   | C - 16      |                           |                                      |

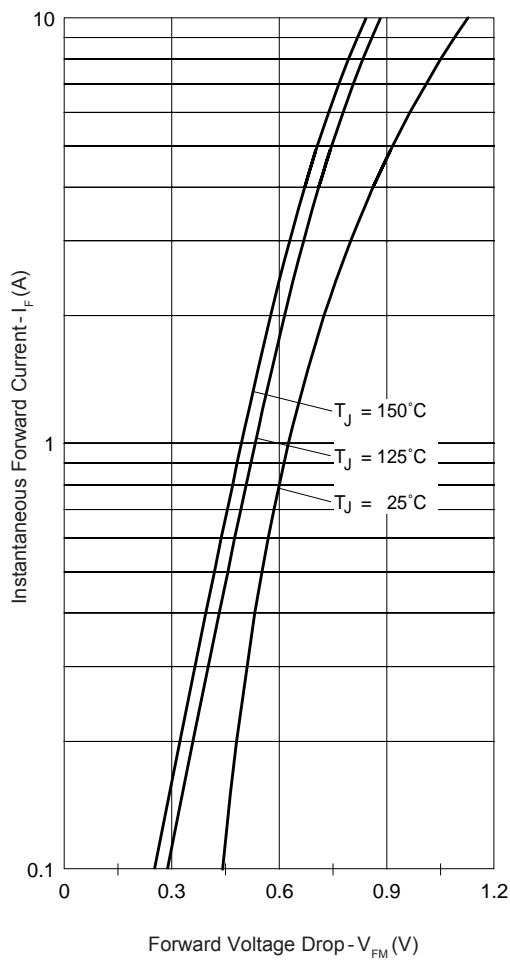


Fig. 1 - Max. Forward Voltage Drop Characteristics

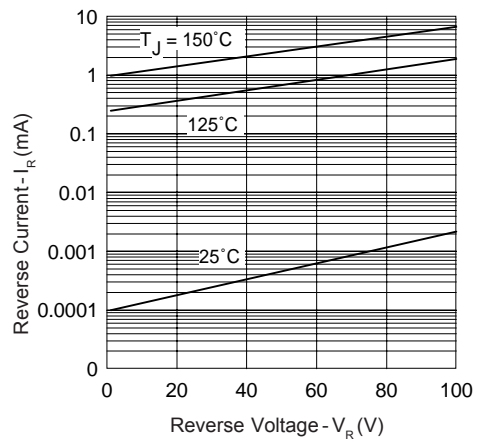


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage



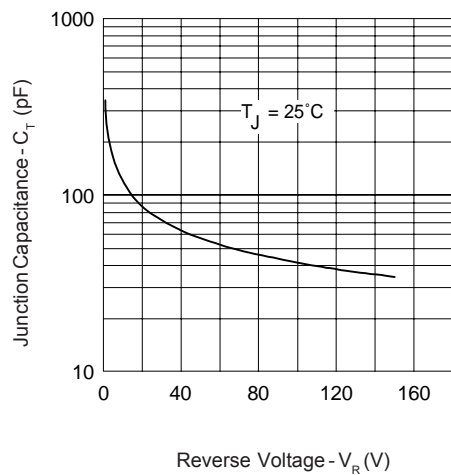



Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

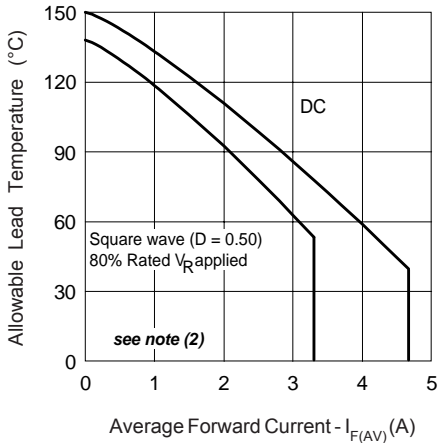

**Fig. 4 - Max. Allowable Lead Temperature Vs. Average Forward Current**

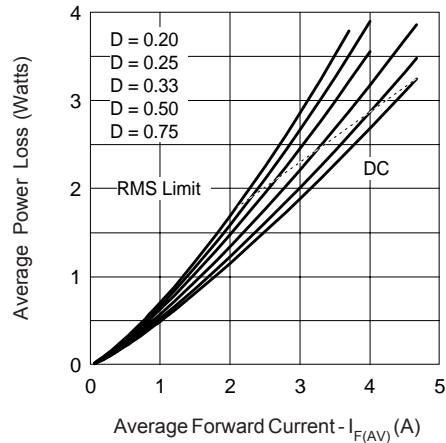

**Fig. 5 - Forward Power Loss Characteristics**

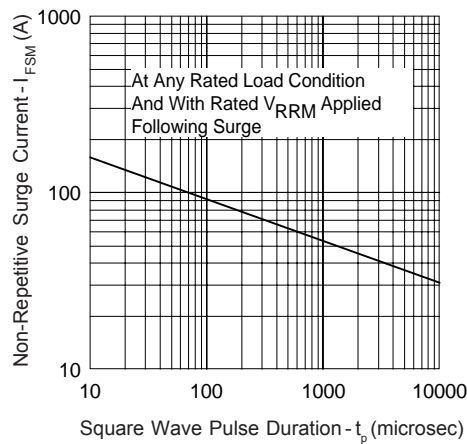

**Fig. 6 - Max. Non-Repetitive Surge Current**

(2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D); I_R @ V_{R1} = 80\% \text{ rated } V_R$

Ordering Information Table

| Device Code |  |    |    |    |    |    |   |   |   |   |   |
|-------------|--|----|----|----|----|----|---|---|---|---|---|
|             | <table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">31</td> <td style="padding: 5px;">D</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">10</td> <td style="padding: 5px;">TR</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> </tr> </table> | 31 | D  | Q  | 10 | TR | ① | ② | ③ | ④ | ⑤ |
| 31          | D  | Q  | 10 | TR |    |    |   |   |   |   |   |
| ①           | ②  | ③  | ④  | ⑤  |    |    |   |   |   |   |   |
| <b>1</b>    | - 31 = 3.3A (Axial and small packages - Current is x10)  |    |    |    |    |    |   |   |   |   |   |
| <b>2</b>    | - D = DO-41 package  |    |    |    |    |    |   |   |   |   |   |
| <b>3</b>    | - Q = Schottky Q.. Series  |    |    |    |    |    |   |   |   |   |   |
| <b>4</b>    | - 10 = Voltage Ratings   |    |    |    |    |    |   |   |   |   |   |
| <b>5</b>    | - TR= Tape & Reel package (1200 pcs)   |    |    |    |    |    |   |   |   |   |   |
|             | - = Box package (500 pcs)  |    |    |    |    |    |   |   |   |   |   |

10 = 100V  
 09 = 90V

```

31DQ10
*****
* SPICE Model Diode *
*****
.SUBCKT 31DQ10 ANO CAT
D1 ANO 1 CAT
*Define diode model
.MODEL DMOD D(Is=56.46E-06 N=2.202 Rs=28.27E-03 Ikf=0.5957 Xti=2 Eg=1.11
+ Cjo=199.3E-12 M=0.4572 Vj=1.873 Fc=0.5 Isr=165.6E-24 Nr=4.955
+ Bv=119.9 Ibv=215.5E-06 Tt=21.64E-09)
*****
.ENDS 31DQ10
  
```

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.