



APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement
Semiconductor Equipment

FEATURES

1 / 2

- 1 WATT UNREGULATED OUTPUT POWER
- OUTPUT CURRENT UP TO 0.2A
- SINGLE-IN-LINE PACKAGE (SIP)
- HIGH EFFICIENCY FOR LOW POWER APPLICATION
- INPUT RANGE FROM 4.5VDC TO 5.5VDC, 10.8VDC TO 13.2 VDC, 13.5VDC TO 16.5VDC AND 21.6VDC TO 26.4VDC
- UL 94-V0 NON-CONDUCTED CASE
- INTERNAL INPUT & OUTPUT FILTER
- INPUT / OUTPUT ISOLATION UP TO 3KVDC
- SUFFIX-N ISOLATION LEVEL REINFORCE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

OPTIONS

3KV ISOLATION

DESCRIPTION

The DU1P0 series are the standard building blocks for on-board distributed power systems. They are ideally suited to provide single and dual supplies on primarily digital boards with added benefit of galvanic isolation to reduce switching noise.


TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS	
Output power	1 Watt max
Voltage accuracy	Full load and nominal Vin ± 5%
Minimum load (Note 6)	10%
Line regulation	LL to HL at Full Load 1.3% / 1% of Vin
Load regulation	20% to 100% FL 5V output ± 10% others ± 8%
Ripple and noise	20MHz bandwidth See table
Temperature coefficient	±0.1% / °C, max
Short circuit protection	Short term

GENERAL SPECIFICATIONS	
Efficiency	See table
Isolation voltage	Input to Output Standard 1000VDC, min Suffix-N 3000VDC, min
Isolation resistance	10 ⁹ ohms, min
Isolation capacitance	30pF, max
Switching frequency	60KHz, min
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1
Case material	Non-conductive black plastic
Base material	None
Potting material	Epoxy (UL94-V0)
Dimensions	0.77 X 0.24 X 0.40 Inch (19.6 X 6.0 X 10.2 mm)
Weight	2.0g (0.071oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 1.471 x 10 ⁷ hrs MIL-HDBK-217F 1.238 x 10 ⁷ hrs

INPUT SPECIFICATIONS	
Input voltage range	5V nominal input 4.5 – 5.5VDC
	12V nominal input 10.8 – 13.2VDC
	15V nominal input 13.5 – 16.5VDC
	24V nominal input 21.6 – 26.4VDC
Input filter	Capacitor

ENVIRONMENTAL SPECIFICATIONS	
Operating temperature range	-25°C ~ +85°C (with derating)
Storage temperature range	-55°C ~ +105°C
Thermal shock	MIL-STD-810F
Vibration	10~55Hz, 10G, 30minutes along X,Y and Z
Relative humidity	5% to 95% RH

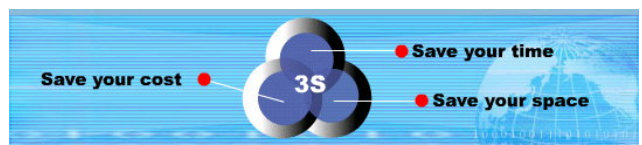




1 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Eff (4) (%)	Capacitor Load max(5)
			Min. load	Full load		No load (3)	Full load (2)		
DU1P0-05S05	4.5 – 5.5 VDC	5 VDC	20mA	200mA	100mVp-p	42mA	274mA	77	330uF
DU1P0-05S12	4.5 – 5.5 VDC	12 VDC	8.3mA	83mA	100mVp-p	32mA	255mA	82	330uF
DU1P0-05S15	4.5 – 5.5 VDC	15 VDC	6.7mA	67mA	100mVp-p	35mA	261mA	81	330uF
DU1P0-05D05	4.5 – 5.5 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	40mA	270mA	78	±150uF
DU1P0-05D12	4.5 – 5.5 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	35mA	258mA	82	±150uF
DU1P0-05D15	4.5 – 5.5 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	40mA	257mA	81	±150uF
DU1P0-12S05	10.8 – 13.2 VDC	5 VDC	20mA	200mA	100mVp-p	17mA	114mA	77	330uF
DU1P0-12S12	10.8 – 13.2 VDC	12 VDC	8.3mA	83mA	100mVp-p	17mA	106mA	82	330uF
DU1P0-12S15	10.8 – 13.2 VDC	15 VDC	6.7mA	67mA	100mVp-p	18mA	112mA	79	330uF
DU1P0-12D05	10.8 – 13.2 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	18mA	114mA	77	±150uF
DU1P0-12D12	10.8 – 13.2 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	18mA	109mA	81	±150uF
DU1P0-12D15	10.8 – 13.2 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	18mA	106mA	82	±150uF
DU1P0-15S05	13.5 – 16.5 VDC	5 VDC	20mA	200mA	100mVp-p	20mA	97mA	73	330uF
DU1P0-15S12	13.5 – 16.5 VDC	12 VDC	8.3mA	83mA	100mVp-p	18mA	89mA	79	330uF
DU1P0-15S15	13.5 – 16.5 VDC	15 VDC	6.7mA	67mA	100mVp-p	18mA	88mA	80	330uF
DU1P0-15D05	13.5 – 16.5 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	18mA	94mA	75	±150uF
DU1P0-15D12	13.5 – 16.5 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	16mA	88mA	80	±150uF
DU1P0-15D15	13.5 – 16.5 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	16mA	87mA	80	±150uF
DU1P0-24S05	21.6 – 26.4 VDC	5 VDC	20mA	200mA	100mVp-p	12mA	61mA	72	330uF
DU1P0-24S12	21.6 – 26.4 VDC	12 VDC	8.3mA	83mA	100mVp-p	12mA	56mA	78	330uF
DU1P0-24S15	21.6 – 26.4 VDC	15 VDC	6.7mA	67mA	100mVp-p	10mA	57mA	78	330uF
DU1P0-24D05	21.6 – 26.4 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	12mA	59mA	75	±150uF
DU1P0-24D12	21.6 – 26.4 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	10mA	57mA	78	±150uF
DU1P0-24D15	21.6 – 26.4 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	10mA	55mA	79	±150uF

Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C. MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.

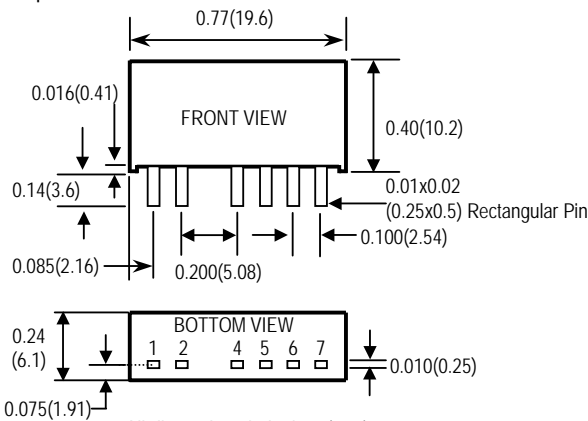

1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

STANDARD		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
4	- OUTPUT	- OUTPUT
5	NC	COMMON
6	+ OUTPUT	+ OUTPUT

"N" Models		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
5	- OUTPUT	- OUTPUT
6	NC	COMMON
7	+ OUTPUT	+ OUTPUT

