

SMPS MOSFET IRFP450NPbF

HEXFET® Power MOSFET


Applications

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply
- High Speed Power Switching
- Lead-Free

| | | |
|------------------------|-------------------------------|----------------------|
| V_{DSS} | R_{ds(on)} max | I_D |
| 500V | 0.37Ω | 14A |

Benefits

- Low Gate Charge Q_g results in Simple Drive Requirement
- Improved Gate, Avalanche and Dynamic dv/dt Ruggedness
- Fully Characterized Capacitance and Avalanche Voltage and Current
- Effective Coss Specified (See AN 1001)

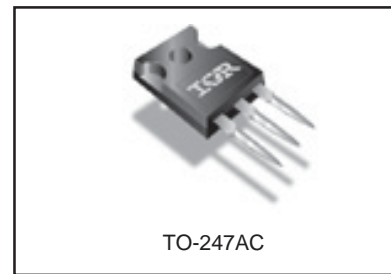

Absolute Maximum Ratings

| | Parameter | Max. | Units |
|---|---|------------------------|--------------|
| I _D @ T _C = 25°C | Continuous Drain Current, V _{GS} @ 10V | 14 | A |
| I _D @ T _C = 100°C | Continuous Drain Current, V _{GS} @ 10V | 8.8 | |
| I _{DM} | Pulsed Drain Current ① | 56 | |
| P _D @ T _C = 25°C | Power Dissipation | 200 | W |
| | Linear Derating Factor | 1.6 | W/°C |
| V _{GS} | Gate-to-Source Voltage | ± 30 | V |
| dv/dt | Peak Diode Recovery dv/dt ② | 5.0 | V/ns |
| T _J | Operating Junction and | -55 to + 150 | °C |
| T _{STG} | Storage Temperature Range | | |
| | Soldering Temperature, for 10 seconds | 300 (1.6mm from case) | |
| | Mounting torque, 6-32 or M3 screw | 10 lbf•in (1.1N•m) | |

Typical SMPS Topologies

- Two transistor Forward
- Half Bridge and Full Bridge
- PFC Boost

Notes ① through ⑤ are on page 8

IRFP450NPbF

International
IR Rectifier

Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------------------|--------------------------------------|------|------|------|----------|--|
| $V_{(BR)DSS}$ | Drain-to-Source Breakdown Voltage | 500 | — | — | V | $V_{GS} = 0V, I_D = 250\mu A$ |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient | — | 0.59 | — | | $V/^\circ\text{C}$ Reference to $25^\circ\text{C}, I_D = 1\text{mA}$ |
| $R_{DS(on)}$ | Static Drain-to-Source On-Resistance | — | — | 0.37 | Ω | $V_{GS} = 10V, I_D = 8.4A$ ④ |
| $V_{GS(th)}$ | Gate Threshold Voltage | 3.0 | — | 5.0 | V | $V_{DS} = V_{GS}, I_D = 250\mu A$ |
| I_{DSS} | Drain-to-Source Leakage Current | — | — | 25 | μA | $V_{DS} = 500V, V_{GS} = 0V$ |
| | | — | — | 250 | | $V_{DS} = 400V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| I_{GSS} | Gate-to-Source Forward Leakage | — | — | 100 | nA | $V_{GS} = 30V$ |
| | Gate-to-Source Reverse Leakage | — | — | -100 | | $V_{GS} = -30V$ |

Dynamic @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|-----------------|---------------------------------|------|------|------|-------|---|
| g_{fs} | Forward Transconductance | 7.9 | — | — | S | $V_{DS} = 50V, I_D = 8.4A$ |
| Q_g | Total Gate Charge | — | — | 77 | nC | $I_D = 14A$ |
| Q_{gs} | Gate-to-Source Charge | — | — | 26 | | $V_{DS} = 400V$ |
| Q_{gd} | Gate-to-Drain ("Miller") Charge | — | — | 34 | | $V_{GS} = 10V$, See Fig. 6 and 13 ④ |
| $t_{d(on)}$ | Turn-On Delay Time | — | 20 | — | ns | $V_{DD} = 250V$ |
| t_r | Rise Time | — | 63 | — | | $I_D = 14A$ |
| $t_{d(off)}$ | Turn-Off Delay Time | — | 29 | — | | $R_G = 6.2\Omega$ |
| t_f | Fall Time | — | 25 | — | | $V_{GS} = 10V$, See Fig. 10 ④ |
| C_{iss} | Input Capacitance | — | 2260 | — | pF | $V_{GS} = 0V$ |
| C_{oss} | Output Capacitance | — | 210 | — | | $V_{DS} = 25V$ |
| C_{rSS} | Reverse Transfer Capacitance | — | 14 | — | | $f = 1.0\text{MHz}$, See Fig. 5 |
| C_{oss} | Output Capacitance | — | 2410 | — | | $V_{GS} = 0V, V_{DS} = 1.0V, f = 1.0\text{MHz}$ |
| C_{oss} | Output Capacitance | — | 59 | — | | $V_{GS} = 0V, V_{DS} = 400V, f = 1.0\text{MHz}$ |
| $C_{oss\ eff.}$ | Effective Output Capacitance | — | 110 | — | | $V_{GS} = 0V, V_{DS} = 0V$ to $400V$ ⑤ |


Avalanche Characteristics

| | Parameter | Typ. | Max. | Units |
|----------|---------------------------------|------|------|-------|
| E_{AS} | Single Pulse Avalanche Energy ② | — | 170 | mJ |
| I_{AR} | Avalanche Current ① | — | 14 | A |
| E_{AR} | Repetitive Avalanche Energy ① | — | 20 | mJ |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|-------------------------------------|------|------|--------------------|
| $R_{\theta JC}$ | Junction-to-Case | — | 0.64 | $^\circ\text{C/W}$ |
| $R_{\theta CS}$ | Case-to-Sink, Flat, Greased Surface | 0.24 | — | |
| $R_{\theta JA}$ | Junction-to-Ambient | — | 40 | |

Diode Characteristics

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|----------|--|---|------|------|---------------|--|
| I_S | Continuous Source Current (Body Diode) | — | — | 14 | A | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I_{SM} | Pulsed Source Current (Body Diode) ① | — | — | 56 | | |
| V_{SD} | Diode Forward Voltage | — | — | 1.4 | V | $T_J = 25^\circ\text{C}, I_S = 14A, V_{GS} = 0V$ ④ |
| t_{rr} | Reverse Recovery Time | — | 430 | 650 | ns | $T_J = 25^\circ\text{C}, I_F = 14A$ |
| Q_{rr} | Reverse Recovery Charge | — | 3.7 | 5.6 | μC | $di/dt = 100A/\mu\text{s}$ ④ |
| t_{on} | Forward Turn-On Time | Intrinsic turn-on time is negligible (turn-on is dominated by L_S+L_D) | | | | |

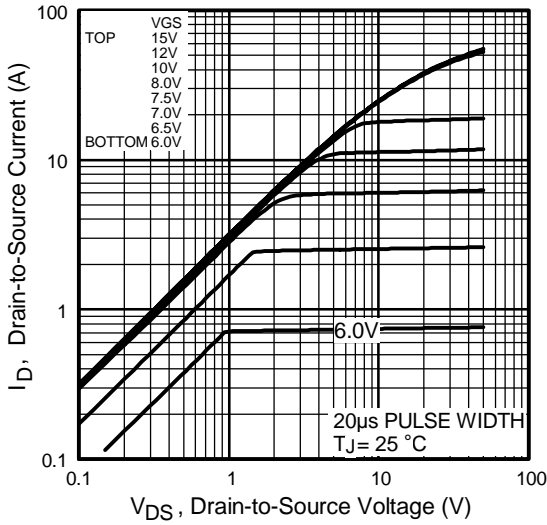


Fig 1. Typical Output Characteristics

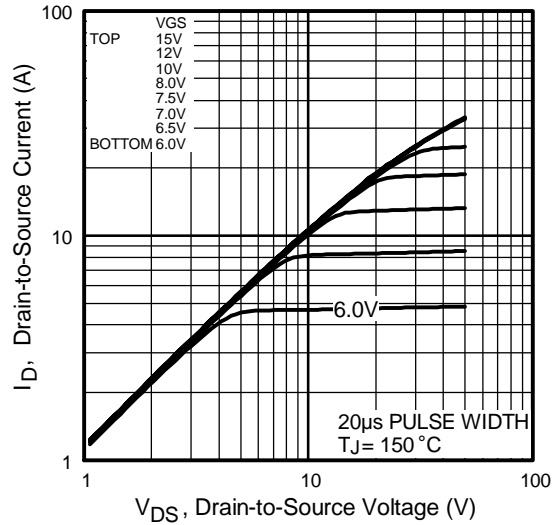


Fig 2. Typical Output Characteristics

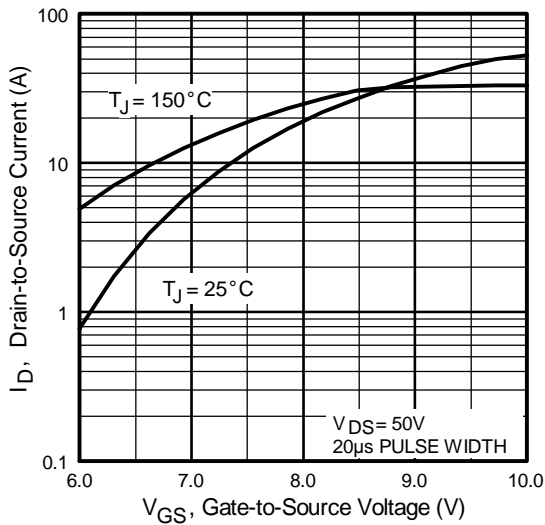


Fig 3. Typical Transfer Characteristics

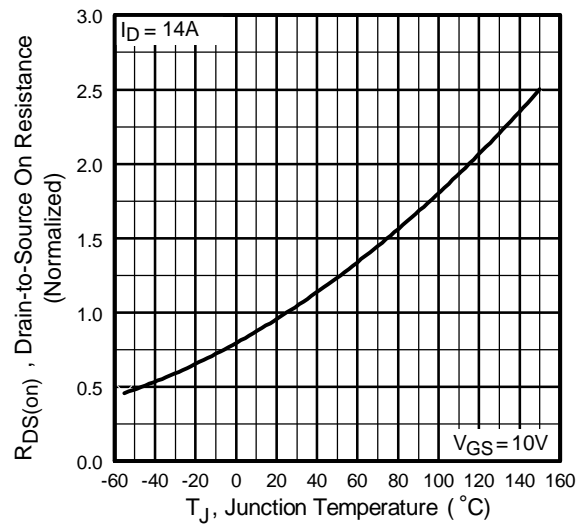


Fig 4. Normalized On-Resistance Vs. Temperature

IRFP450NPbF

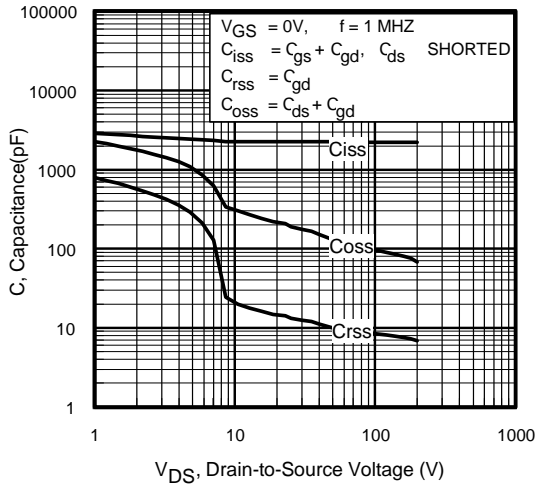


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

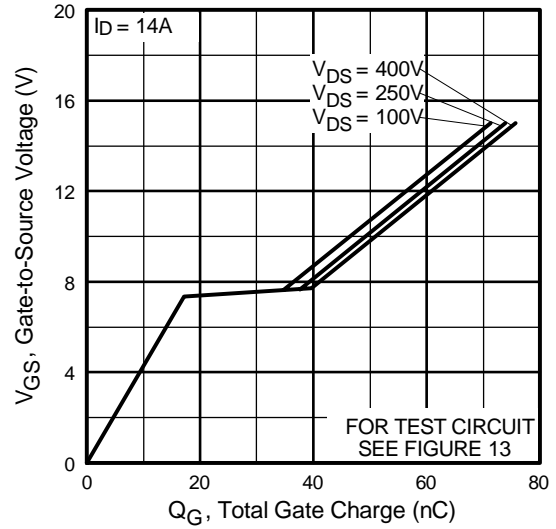


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

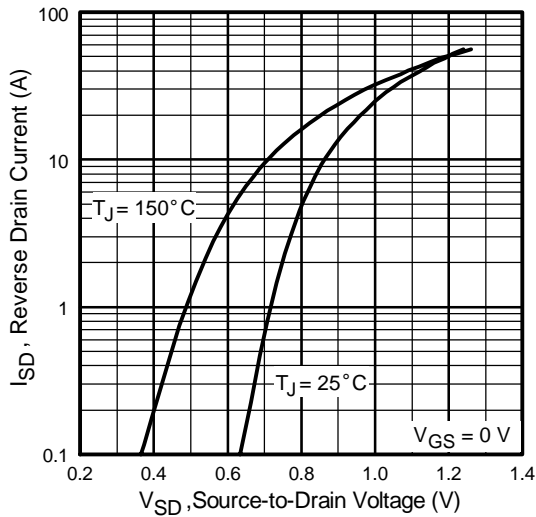


Fig 7. Typical Source-Drain Diode Forward Voltage

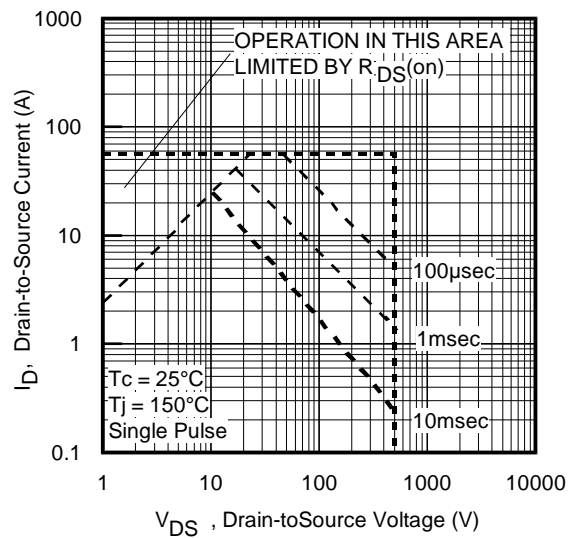


Fig 8. Maximum Safe Operating Area

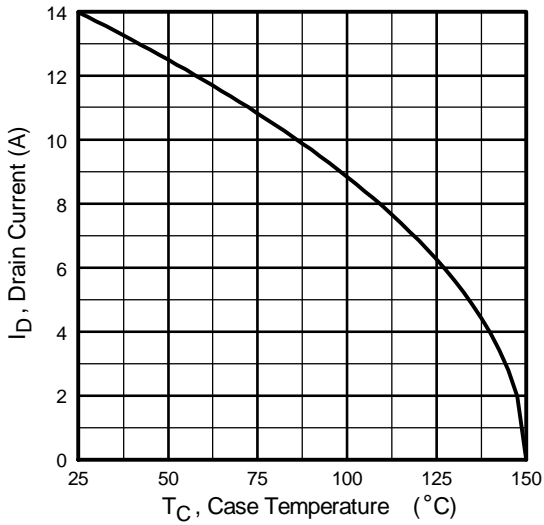


Fig 9. Maximum Drain Current Vs. Case Temperature

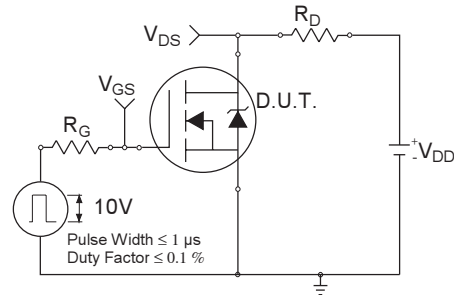


Fig 10a. Switching Time Test Circuit

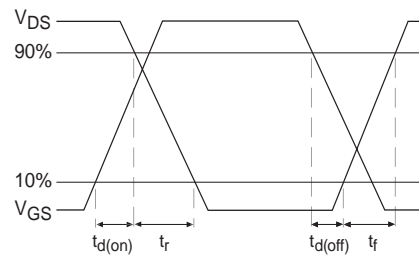


Fig 10b. Switching Time Waveforms

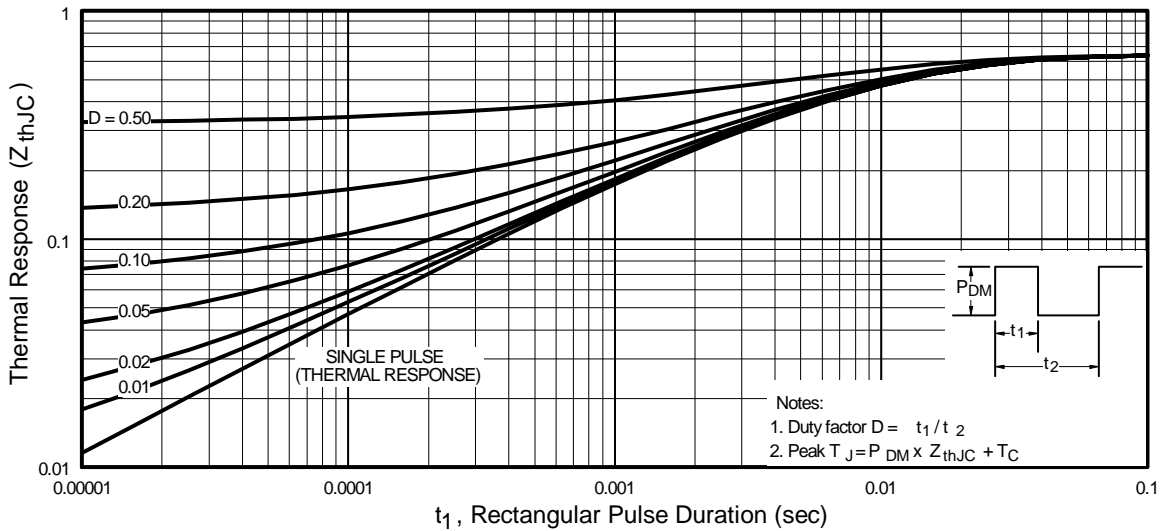


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRFP450NPbF

International
IR Rectifier

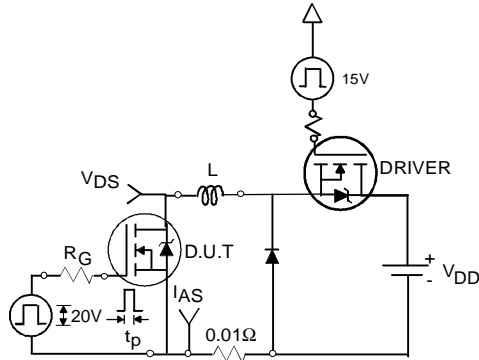


Fig 12a. Unclamped Inductive Test Circuit

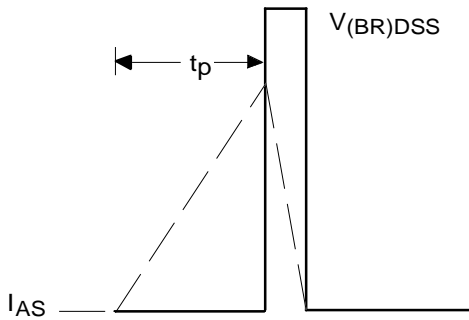


Fig 12b. Unclamped Inductive Waveforms

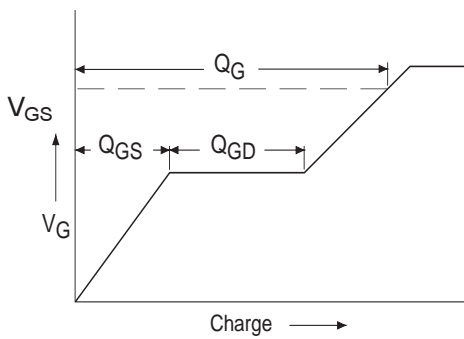


Fig 13a. Basic Gate Charge Waveform

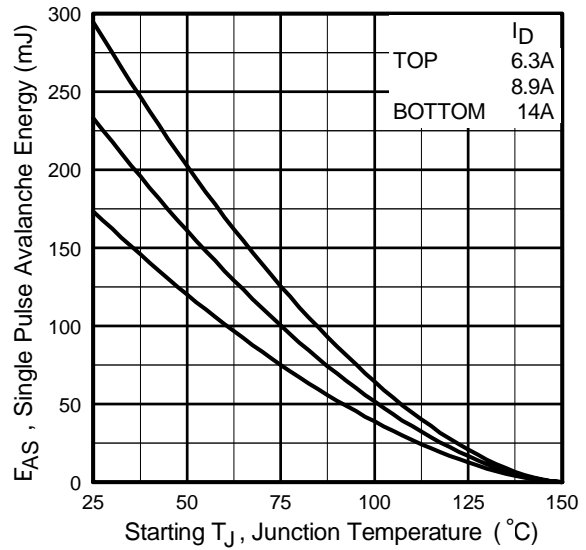


Fig 12c. Maximum Avalanche Energy Vs. Drain Current



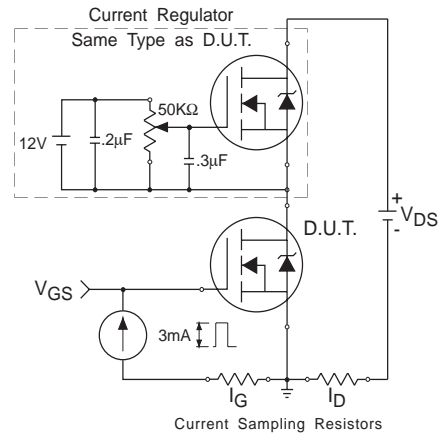


Fig 13b. Gate Charge Test Circuit

Peak Diode Recovery dv/dt Test Circuit

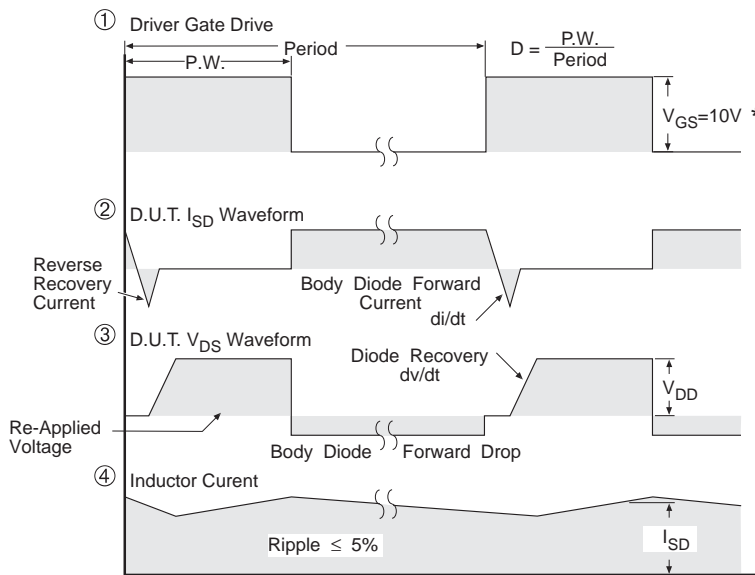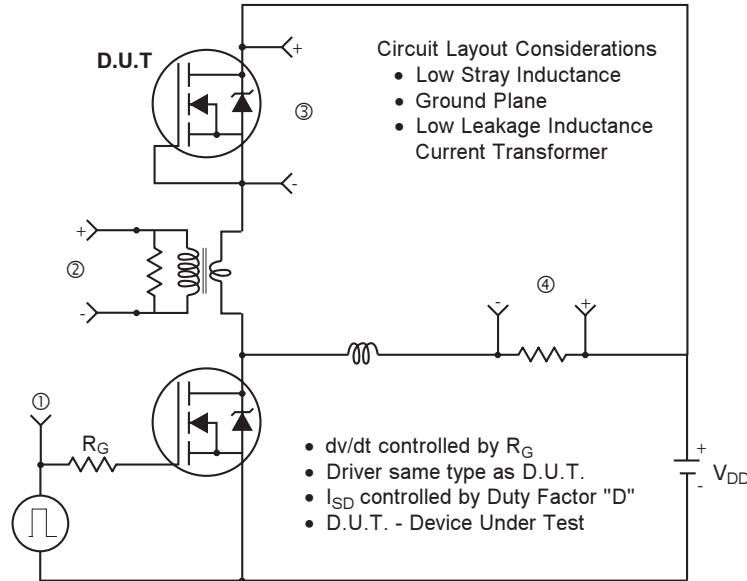


* $V_{GS} = 5V$ for Logic Level Devices

Fig 14. For N-Channel HEXFETS

IRFP450NPbF

International
IR Rectifier

TO-247AC Package Outline Dimensions are shown in millimeters (inches)

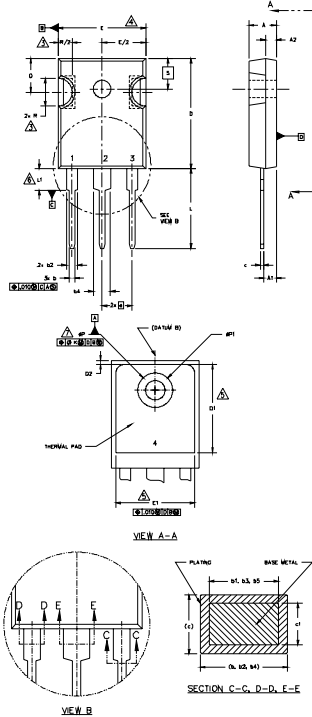


NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M 1994.
- DIMENSIONS ARE SHOWN IN INCHES (MILLIMETERS)
- CONTOUR OF SLOT OPTIONAL.
- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS D1 & E1.
- LEAD FINISH UNCONTROLLED IN L1.
- ØP TO HAVE A MAXIMUM DRAFT ANGLE OF 1.5° TO THE TOP OF THE PART WITH A MAXIMUM HOLE DIAMETER OF .154" [3.91]
- OUTLINE CONFORMS TO JEDEC OUTLINE TO-247 WITH THE EXCEPTION OF DIMENSION C.

| SYMBOL | DIMENSIONS | | | | NOTES | |
|--------|------------|------|-------------|-------|-------|------------------|
| | INCHES | | MILLIMETERS | | | |
| | MIN. | MAX. | MIN. | MAX. | | |
| A | .185 | .209 | 4.65 | 5.31 | | |
| A1 | .087 | .102 | 2.21 | 2.59 | | |
| A2 | .059 | .098 | 1.50 | 2.49 | | |
| b | .039 | .055 | 0.99 | 1.40 | | LEAD ASSIGNMENTS |
| b1 | .039 | .053 | 0.99 | 1.35 | | HEXFET |
| b2 | .065 | .094 | 1.65 | 2.39 | | 1.- GATE |
| b3 | .065 | .092 | 1.65 | 2.37 | | 2.- DRAIN |
| b4 | .102 | .135 | 2.59 | 3.43 | | 3.- SOURCE |
| b5 | .102 | .133 | 2.59 | 3.38 | | 4.- DRAIN |
| c | .015 | .034 | 0.38 | 0.86 | | |
| c1 | .015 | .030 | 0.38 | 0.76 | | |
| D | .776 | .815 | 19.71 | 20.70 | 4 | IGBTs, CoPACK |
| D1 | .515 | - | 13.08 | - | 5 | 1.- GATE |
| D2 | .020 | .030 | 0.51 | 0.76 | | 2.- COLLECTOR |
| E | .602 | .625 | 15.29 | 15.87 | 4 | 3.- EMITTER |
| E1 | .540 | - | 13.72 | - | | 4.- COLLECTOR |
| e | .215 BSC | | 5.46 BSC | | | |
| Øk | .010 | | 2.54 | | | DIODES |
| L | .559 | .634 | 14.20 | 16.10 | | 1.- ANODE/OPEN |
| L1 | .146 | .169 | 3.71 | 4.29 | | 2.- CATHODE |
| N | 3 7.62 BSC | | | | | 3.- ANODE |
| ØP | .140 | .144 | 3.56 | 3.66 | | |
| ØP1 | - | .275 | - | 6.98 | | |
| Q | .209 | .224 | 5.31 | 5.69 | | |
| R | .178 | .216 | 4.52 | 5.49 | | |
| S | .217 BSC | | 5.51 BSC | | | |

TO-247AC Part Marking Information

EXAMPLE: THIS IS AN IRFP30
WITH ASSEMBLY
LOT CODE 5657
ASSEMBLED ON WW 35, 2000
IN THE ASSEMBLY LINE "H"
Note: "P" in assembly line
position indicates "Lead-Free"



Notes:

- Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- Starting $T_J = 25^\circ\text{C}$, $L = 1.7\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 14\text{A}$. (See Figure 12)
- $I_{SD} \leq 14\text{A}$, $di/dt \leq 510\text{A}/\mu\text{s}$, $V_{DD} \leq V_{(BR)DSS}$,
 $T_J \leq 150^\circ\text{C}$
- Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- C_{OSS} eff. is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 80% V_{DSS}

Data and specifications subject to change without notice.
This product has been designed and qualified for the Automotive [Q101] market.
Qualification Standards can be found on IR's Web site,

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

07/04



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.