




Dual Common-Cathode Schottky Rectifiers

High Barrier Technology for Improved High Temperature Performance

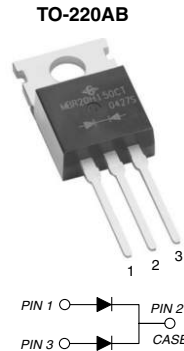

FEATURES

- Guardring for overvoltage protection
- Low power losses, high efficiency
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High frequency operation
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in low voltage, high frequency rectifier of switching mode power supplies, freewheeling diodes, dc-to-dc converters or polarity protection application.

MECHANICAL DATA

Case: TO-220AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test

Mounting Torque: 10 in-lbs maximum**Polarity:** As marked

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	20 A x 2
V_{RRM}	35 V to 60 V
I_{FSM}	350 A, 320 A
V_F at $I_F = 20$ A	0.55 V, 0.60 V
I_R	100 μ A
T_J max.	175 °C

MAXIMUM RATINGS ($T_C = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	MBR40H35CT	MBR40H45CT	MBR40H50CT	MBR40H60CT	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	50	60	V
Maximum average forward rectified current (Fig. 1) total device per diode	$I_{F(AV)}$	40 20				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on per diode rated load	I_{FSM}	350	320			A
Peak repetitive reverse current per diode at $t_p = 2$ μ s, 1 kHz	I_{RRM}	1.0				A
Peak non-repetitive reverse surge energy (8/20 μ s waveform) per diode	E_{RSM}	20				mJ
Non-repetitive avalanche energy at 25 °C, $I_{AS} = 3.0$ A, L = 5 mH per diode	E_{AS}	22.5				mJ
Voltage rate of change (rated V_R)	dV/dt	10 000				V/ μ s
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 175				°C

MBR40H35CT thru MBR40H60CT

New Product



Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS		SYMBOL	MBR40H35CT	MBR40H45CT	MBR40H50CT	MBR40H60CT	UNIT
Maximum instantaneous forward voltage per diode ⁽¹⁾	$I_F = 20\text{ A}$	$T_J = 25\text{ }^\circ\text{C}$	V_F		0.64	0.68		V
	$I_F = 20\text{ A}$	$T_J = 125\text{ }^\circ\text{C}$						
	$I_F = 40\text{ A}$	$T_J = 25\text{ }^\circ\text{C}$						
	$I_F = 40\text{ A}$	$T_J = 125\text{ }^\circ\text{C}$						
Maximum instantaneous reverse current per diode ⁽²⁾	rated V_R	$T_J = 25\text{ }^\circ\text{C}$ $T_J = 125\text{ }^\circ\text{C}$	I_R		100 15			μA mA
Typical junction capacitance	4.0 V, 1 MHz per diode		C_J	1200		920		pF

Notes:

- (1) Pulse test: 300 μs pulse width, 1 % duty cycle
- (2) Pulse test: Pulse width $\leq 40\text{ ms}$

THERMAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MBR40H35CT	MBR40H45CT	MBR40H50CT	MBR40H60CT	UNIT	
Thermal resistance, junction to case per diode	$R_{\theta JC}$	1.8					$^\circ\text{C/W}$

ORDERING INFORMATION (Example)					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AB	MBR40H45CT-E3/45	1.58	45	50/tube	Tube

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

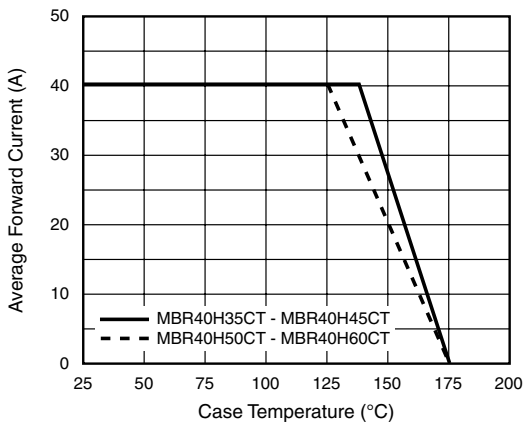


Figure 1. Forward Derating Curve Per Diode

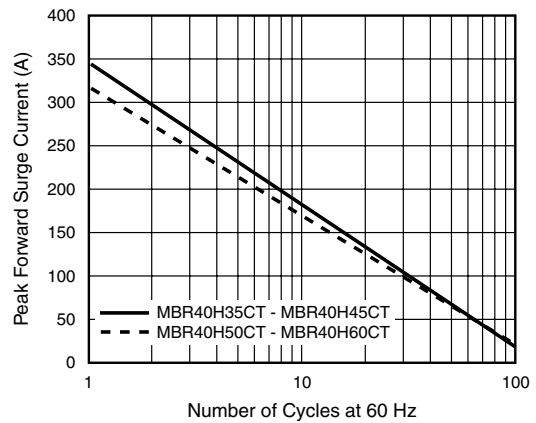


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Diode

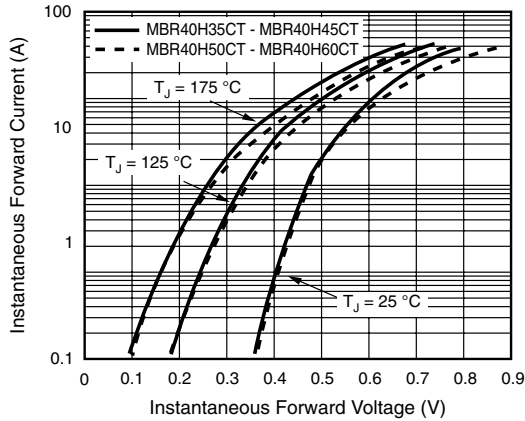


Figure 3. Typical Instantaneous Forward Characteristics Per Diode

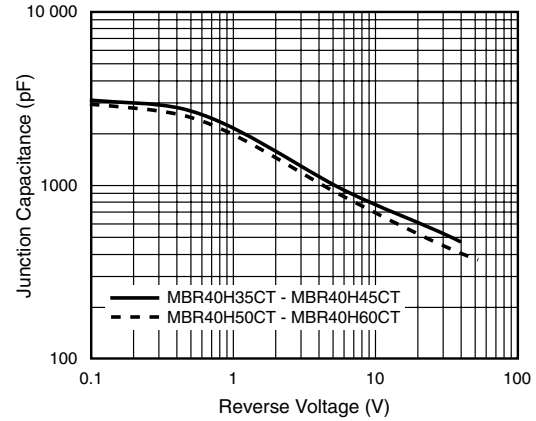


Figure 5. Typical Junction Capacitance Per Diode

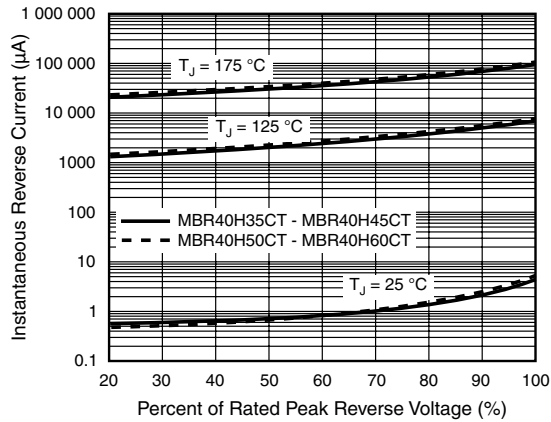


Figure 4. Typical Reverse Characteristics Per Diode


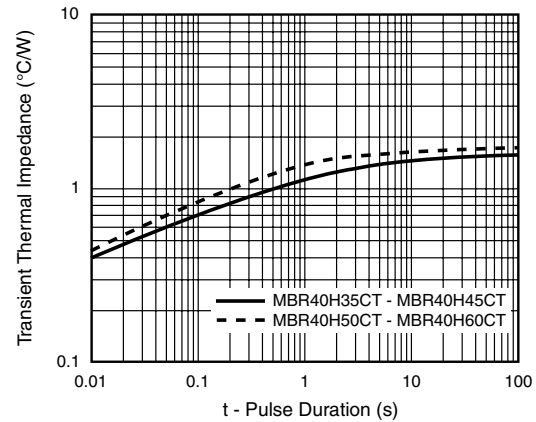


Figure 6. Typical Transient Thermal Impedance Per Diode

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

TO-220AB



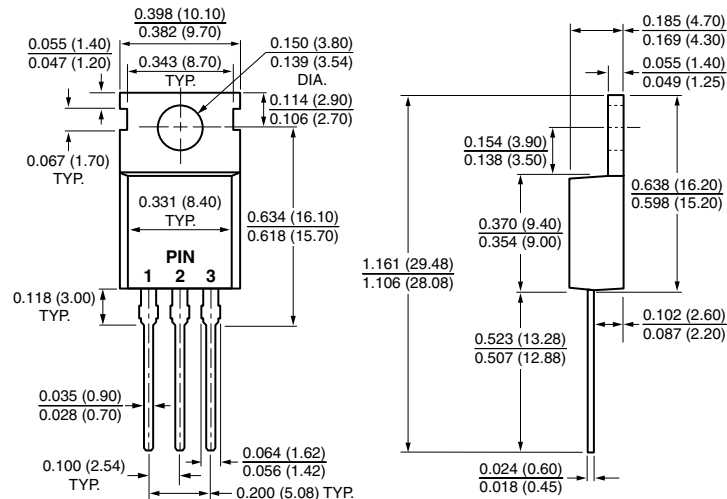

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.