



P-Channel 60-V (D-S), 175°C MOSFET


PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-60	0.015 @ $V_{GS} = -10$ V	-50 ^d
	0.020 @ $V_{GS} = -4.5$ V	-50

FEATURES


- TrenchFET® Power MOSFET
- 175°C Junction Temperature

APPLICATIONS

- Automotive 12-V Boardnet

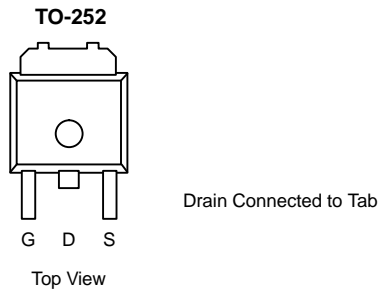

Ordering Information: SUD50P06-15L

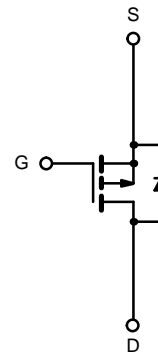

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V_{DS}	-60	V	
Gate-Source Voltage	V_{GS}	± 20		
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	I_D	$T_C = 25^\circ\text{C}$	-50 ^d	A
		$T_C = 125^\circ\text{C}$	-39	
Pulsed Drain Current	I_{DM}	-80		
Avalanche Current	I_{AR}	-50		
Repetitive Avalanche Energy ^a	E_{AR}	125	mJ	
Power Dissipation	P_D	$T_C = 25^\circ\text{C}$	136 ^c	W
		$T_A = 25^\circ\text{C}$	3 ^{b, c}	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 175	$^\circ\text{C}$	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Junction-to-Ambient ^b	R_{thJA}	$t \leq 10$ sec	15	18	$^\circ\text{C/W}$
		Steady State	40	50	
Junction-to-Case	R_{thJC}	0.82	1.1		

Notes:

- Duty cycle $\leq 1\%$.
- When mounted on 1" square PCB (FR-4 material).
- See SOA curve for voltage derating.
- Package limited.

SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -250 μA	-60			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-1		-3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -48 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -48 V, V _{GS} = 0 V, T _J = 125°C			-50	
		V _{DS} = -48 V, V _{GS} = 0 V, T _J = 175°C			-150	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -10 V	-50			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -10 V, I _D = -17 A		0.012	0.015	Ω
		V _{GS} = -10 V, I _D = -50 A, T _J = 125°C			0.025	
		V _{GS} = -10 V, I _D = -50 A, T _J = 175°C			0.030	
		V _{GS} = -4.5 V, I _D = -14 A			0.020	
Forward Transconductance ^a	g _{fs}	V _{DS} = -15 V, I _D = -17 A		61		S
Dynamic^b						
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = -25 V, f = 1 MHz		4950		pF
Output Capacitance	C _{oss}			480		
Reverse Transfer Capacitance	C _{rss}			405		
Total Gate Charge ^c	Q _g	V _{DS} = -30 V, V _{GS} = -10 V, I _D = -50 A		110	165	nC
Gate-Source Charge ^c	Q _{gs}			19		
Gate-Drain Charge ^c	Q _{gd}			28		
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = -30 V, R _L = 0.6 Ω I _D = -50 A, V _{GEN} = -10 V, R _G = 6 Ω		15	23	ns
Rise Time ^c	t _r			70	105	
Turn-Off Delay Time ^c	t _{d(off)}			175	260	
Fall Time ^c	t _f			175	260	
Source-Drain Diode Ratings and Characteristics (T_C = 25 °C)^b						
Continuous Current	I _s				-50	A
Pulsed Current	I _{SM}				-80	
Forward Voltage ^a	V _{SD}	I _F = -50 A, V _{GS} = 0 V		1.0	1.6	V
Reverse Recovery Time	t _{rr}	I _F = -50 A, di/dt = 100 A/μs		45	70	ns


Notes:

- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.
- Independent of operating temperature.




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Output Characteristics

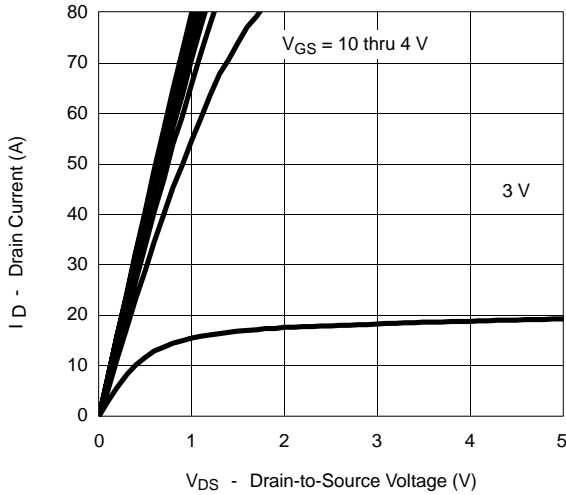


Transfer Characteristics

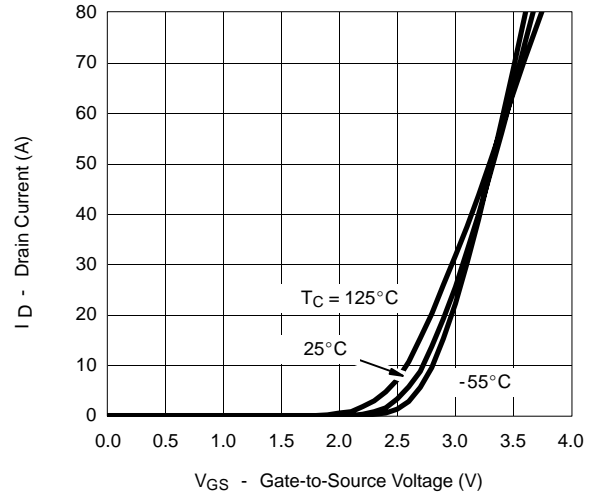


Transconductance

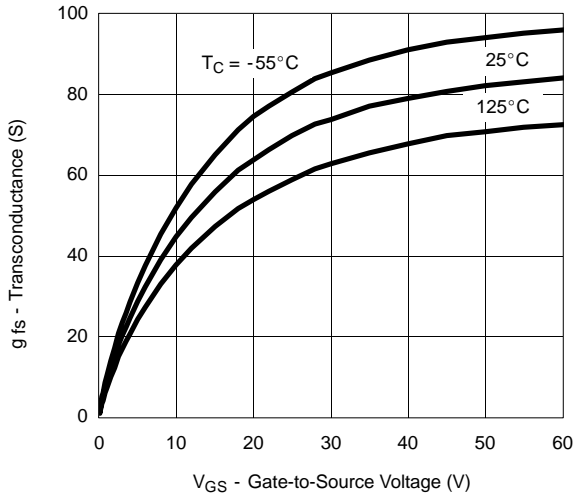


On-Resistance vs. Drain Current

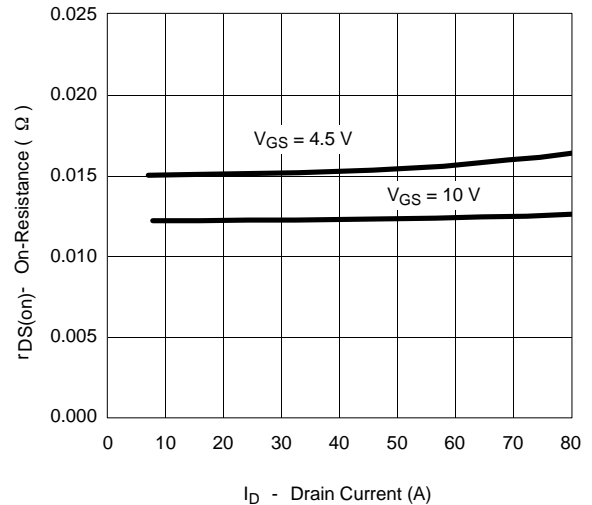



Capacitance

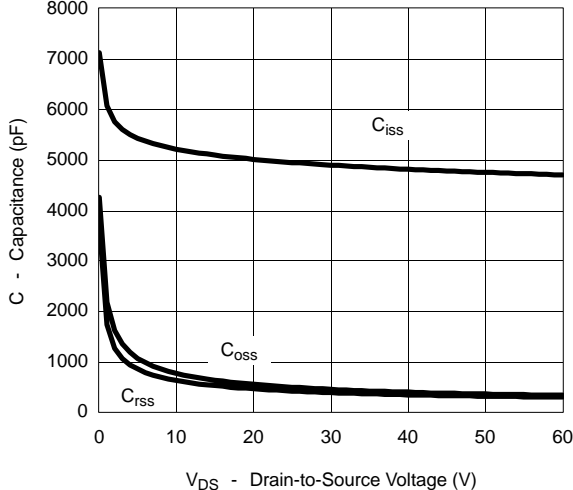




Gate Charge

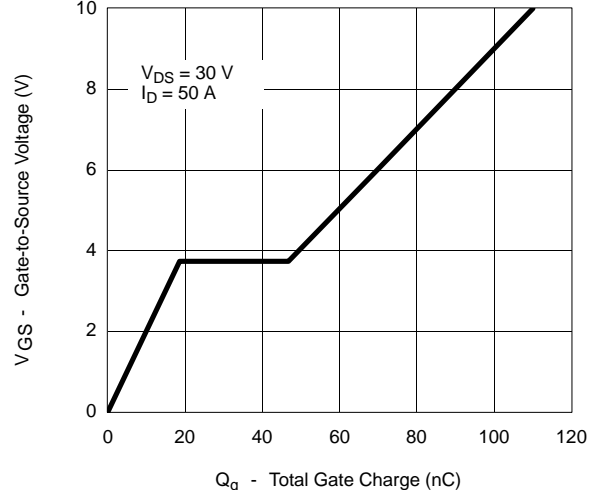

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

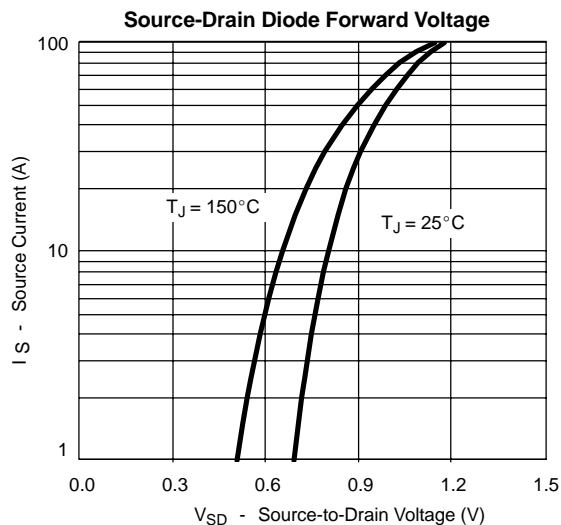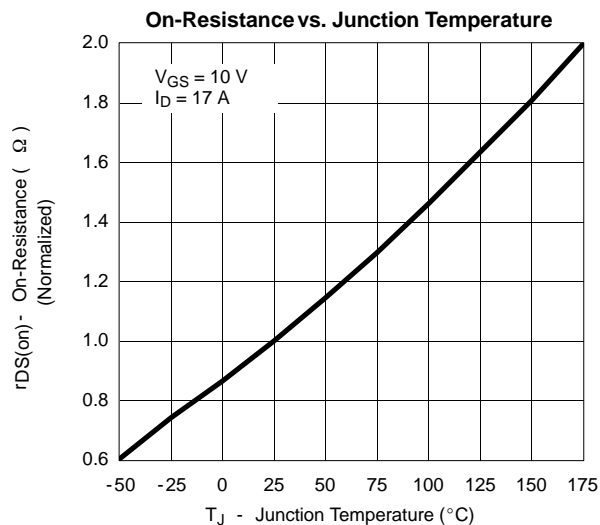

THERMAL RATINGS

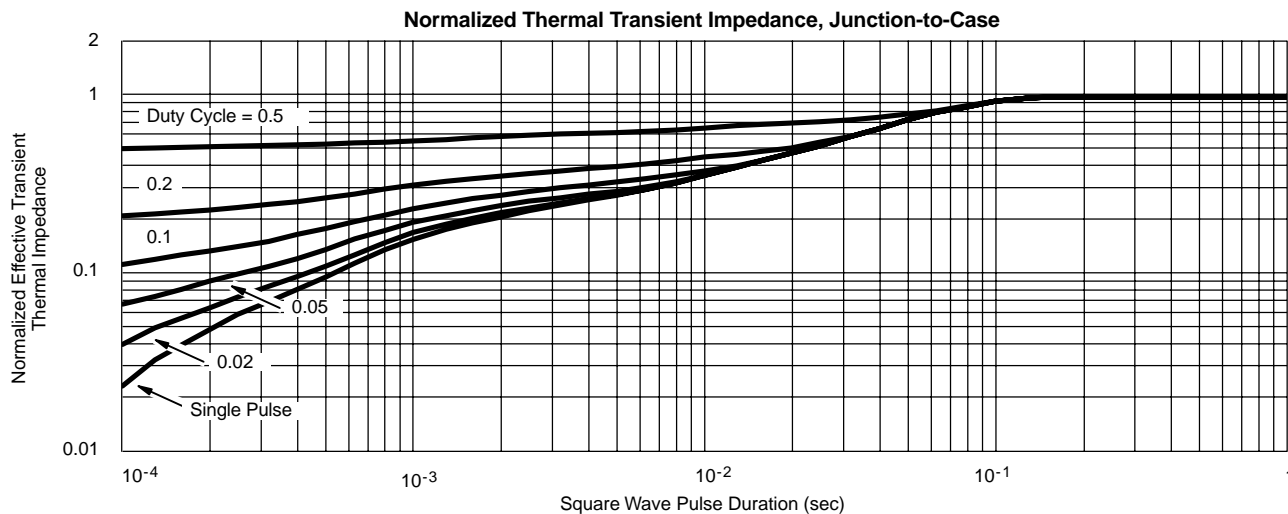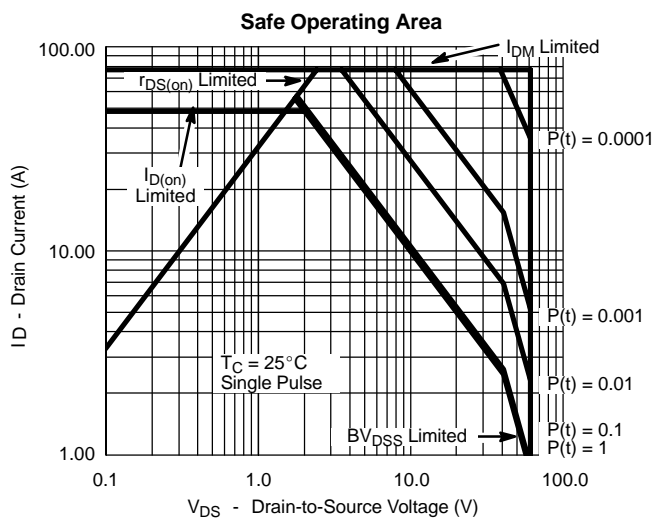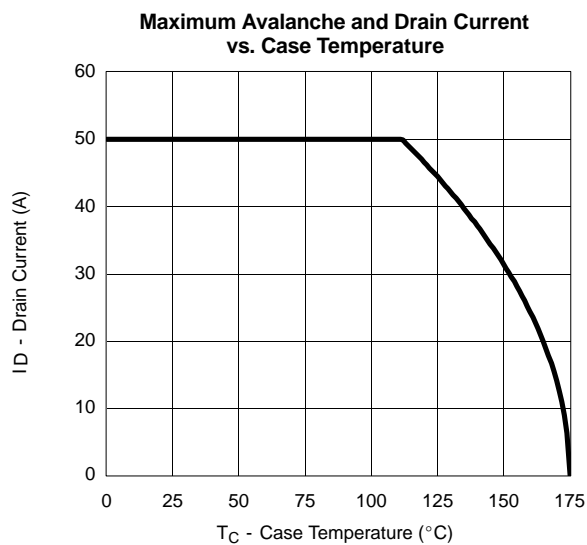



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.