


# HDSP-521A/523A

14.22 mm (0.56 inch) Dual Digit General Purpose Seven Segment Display



## Data Sheet



### Description

The 14.22 mm (0.56 inch) LED dual digit seven segment displays use industry standard size package and pinout. The device is available in either common anode or common cathode. These gray face displays are suitable for indoor use.

### Devices

AlGaAs Red	Description
HDSP-521A	Common Anode Right Hand Decimal
HDSP-523A	Common Cathode Right Hand Decimal

### Features

- **Industry standard size**
- **Industry standard pinout**  
14.22 mm (0.56 inch)  
DIP lead on 2.54 mm
- **AlGaAs Red color**
- **Excellent appearance**  
Evenly lighted segments gray package gives optimum contrast  
± 50 ft. viewing angle
- **Design flexibility**  
Common anode right hand decimal point or common cathode right hand decimal point

### Applications

- **Suitable for indoor use**
- **Not recommended for industrial application, i.e., operating temperature requirements exceeding +85°C or below -25°C<sup>[1]</sup>**
- **Extreme temperature cycling not recommended**


### Note:

1. For additional details, please contact your local Avago sales office or an authorized distributor.

## Part Numbering System

5082 -X X X X-X X X X X


HDSP-X X X X-X X X X X

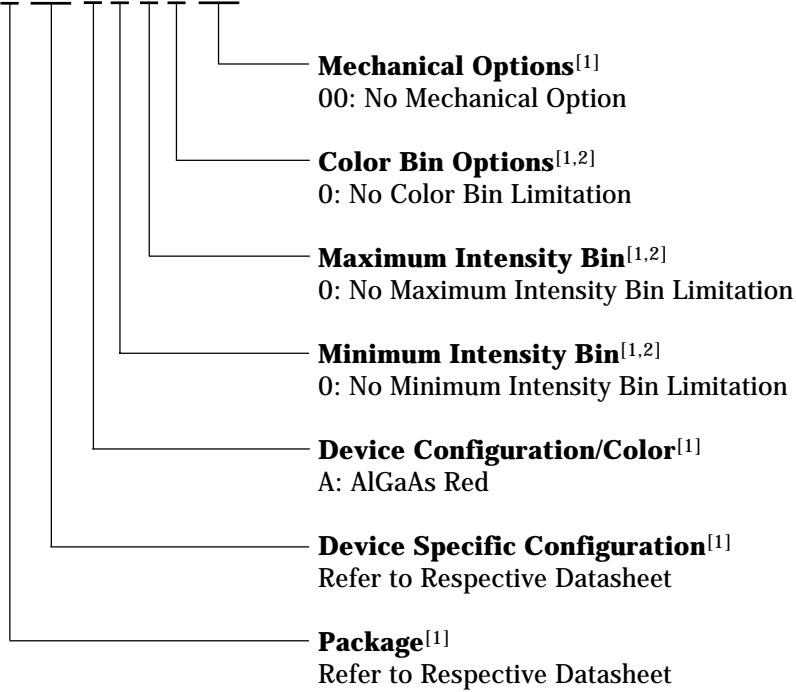

### Notes:


1. For codes not listed in the figure above, please refer to the respective datasheet or contact your nearest Avago representative for details.
2. Bin options refer to shippable bins for a part number. Color and Intensity Bins are typically restricted to 1 bin per tube (exceptions may apply). Please refer to respective datasheet for specific bin limit information.

# Package Dimensions

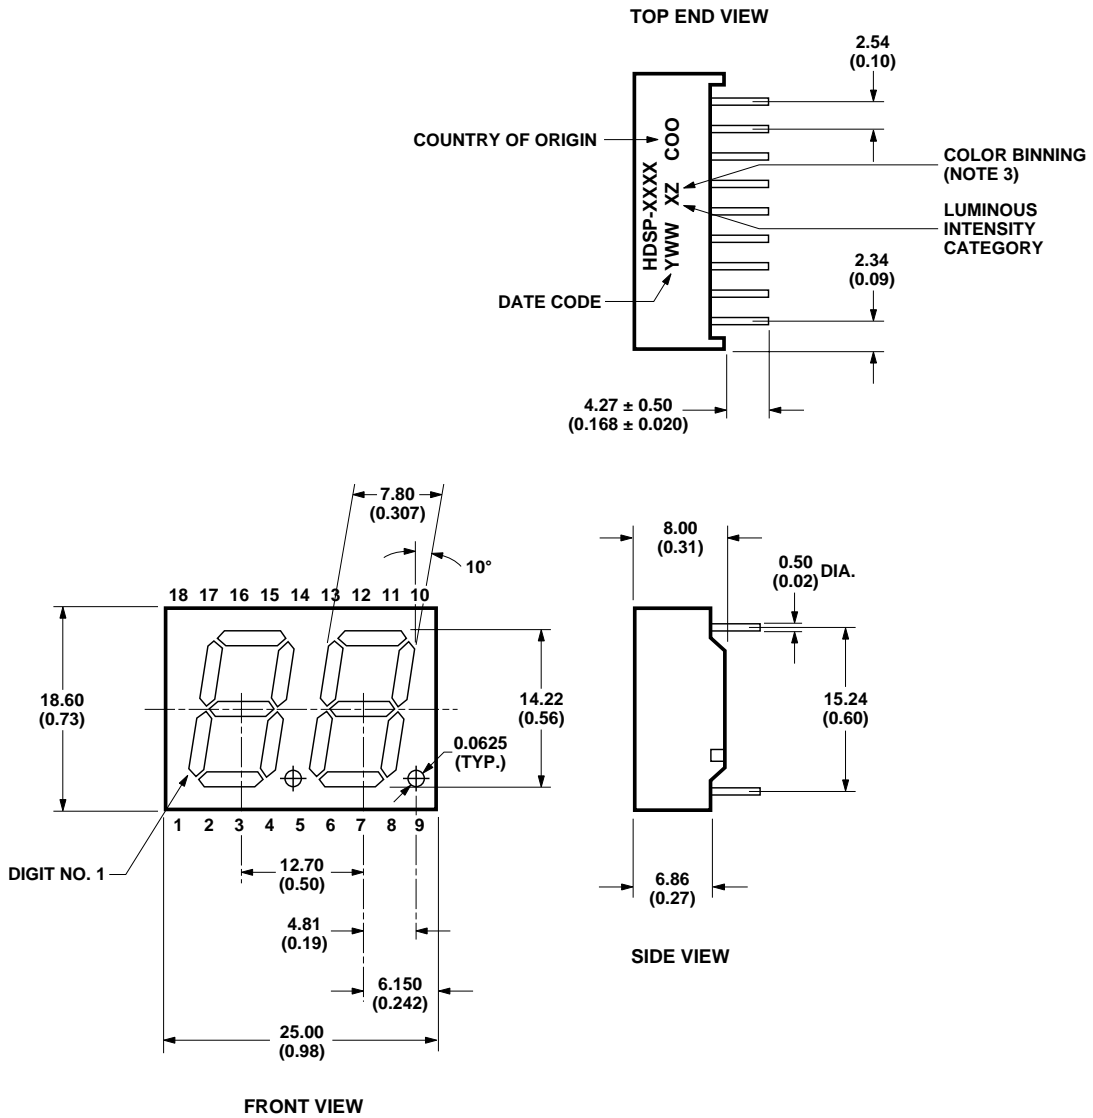


ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).

## Internal Circuit Diagram

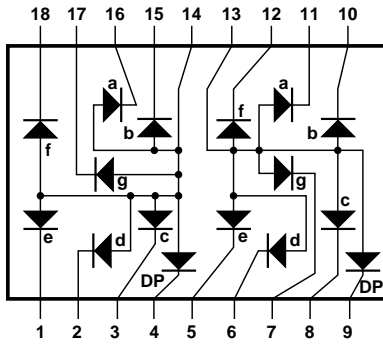

COMMON ANODE

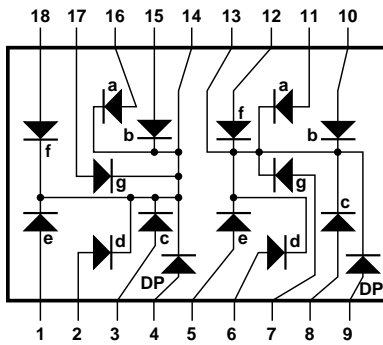

COMMON CATHODE

COMMON ANODE		COMMON CATHODE	
PIN	FUNCTION	PIN	FUNCTION
1	E CATHODE NO. 1	1	E ANODE NO. 1
2	D CATHODE NO. 1	2	D ANODE NO. 1
3	C CATHODE NO. 1	3	C ANODE NO. 1
4	DP CATHODE NO. 1	4	DP ANODE NO. 1
5	E CATHODE NO. 2	5	E ANODE NO. 2
6	D CATHODE NO. 2	6	D ANODE NO. 2
7	G CATHODE NO. 2	7	G ANODE NO. 2
8	C CATHODE NO. 2	8	C ANODE NO. 2
9	DP CATHODE NO. 2	9	DP ANODE NO. 2
10	B CATHODE NO. 2	10	B ANODE NO. 2
11	A CATHODE NO. 2	11	A ANODE NO. 2
12	F CATHODE NO. 2	12	F ANODE NO. 2
13	DIGIT NO. 2 ANODE	13	DIGIT NO. 2 CATHODE
14	DIGIT NO. 1 ANODE	14	DIGIT NO. 1 CATHODE
15	B CATHODE NO. 1	15	B ANODE NO. 1
16	A CATHODE NO. 1	16	A ANODE NO. 1
17	G CATHODE NO. 1	17	G ANODE NO. 1
18	F CATHODE NO. 1	18	F ANODE NO. 1

### Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Description	AlGaAs Red HDSP-52xA	Units
Power Dissipation Segment	30	mW
Forward Current Segment	15 <sup>[1]</sup>	mA
Peak Forward Current per Segment (1/10 Duty Factor at 10 KHz)	80	mA
Operating Temperature Range	-35 to +85	$^\circ\text{C}$
Storage Temperature Range	-35 to +85	$^\circ\text{C}$
Reverse Voltage per Segment or DP	5	V
Wavesoldering Temperature for 3 seconds (at 2 mm Distance from the bodyz)	250	$^\circ\text{C}$

#### Note:

1. Derate above  $25^\circ\text{C}$  at  $0.2\text{ mA}/^\circ\text{C}$ .

### Intensity Bin Limits (mcd at 10 mA)

Bin Name	AlGaAs Red	
	Min. <sup>[1]</sup>	Max. <sup>[1]</sup>
J	3.201	5.050
K	5.051	8.000
L	8.001	12.650

#### Note:

1. Tolerance for each bin limit is  $\pm 10\%$ .

Electrical/Optical Characteristics at  $T_A = 25^\circ\text{C}$   
 AlGaAs Red

Device	Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
521A	Luminous Intensity/Segment	$I_V$		3.66		mcd	$I_F = 5\text{ mA}$
523A			3.201	6.500	mcd	$I_F = 10\text{ mA}$	
	Forward Voltage	$V_F$		1.85	2.00	V	$I_F = 20\text{ mA}$
	Peak Wavelength	$\lambda_{\text{PEAK}}$		660		nm	
	Dominant Wavelength	$\lambda_d$		643		nm	
	Reverse Voltage	$V_R$	5			V	$I_R = 100\ \mu\text{A}$

AlGaAs Red

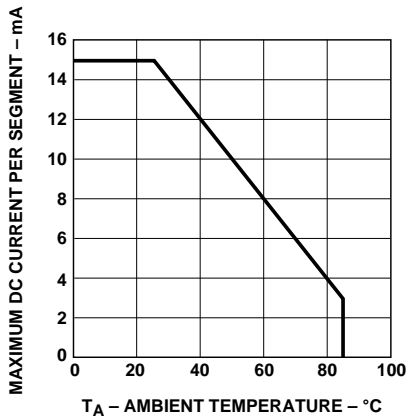


Figure 1. Maximum allowable average or DC current vs. ambient temperature.

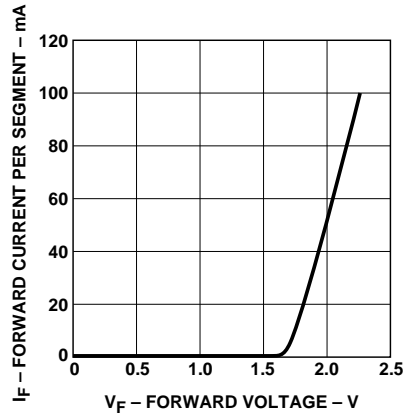


Figure 2. Forward current vs. forward voltage.

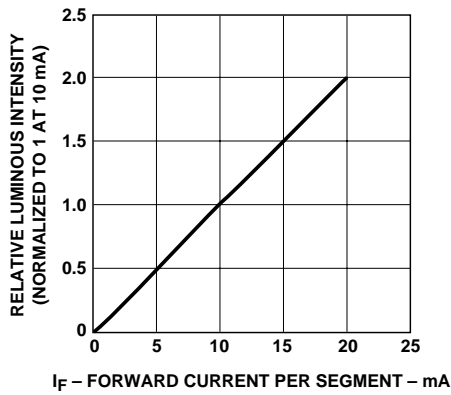


Figure 3. Relative luminous intensity vs. DC forward current.

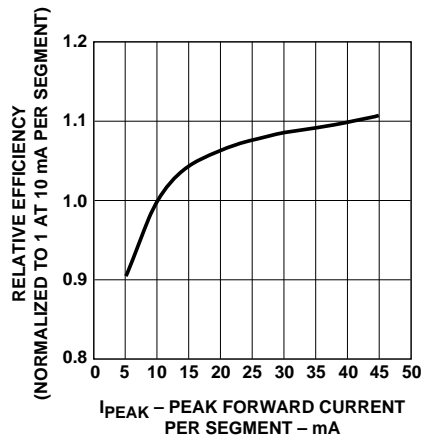


Figure 4. Relative efficiency (luminous intensity per unit current) vs. peak current.

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries.  
Data subject to change. Copyright © 2006 Avago Technologies Limited. All rights reserved. Obsoletes 5980-2919EN  
5988-2970EN May 18, 2006

