

LM8262 Dual RRIO, High Output Current & Unlimited Cap Load Op Amp in MSOP

General Description

The LM8262 is a Rail-to-Rail input and output Op Amp which can operate with a wide supply voltage range. This device has high output current drive, greater than Rail-to-Rail input common mode voltage range, unlimited capacitive load drive capability, and provides tested and guaranteed high speed and slew rate. It is specifically designed to handle the requirements of flat panel TFT panel V_{COM} driver applications as well as being suitable for other low power, and medium speed applications which require ease of use and enhanced performance over existing devices.

Greater than Rail-to-Rail input common mode voltage range with 50dB of Common Mode Rejection, allows high side and low side sensing, among many applications, without having any concerns over exceeding the range and no compromise in accuracy. In addition, most device parameters are insensitive to power supply variations; this design enhancement is yet another step in simplifying its usage. The output stage has low distortion (0.05% THD+N) and can supply a respectable amount of current (15mA) with minimal headroom from either rail (300mV).

The LM8262 is offered in the space saving MSOP package.

Features


($V_S = 5V$, $T_A = 25^\circ C$, Typical values unless specified).

- GBWP 21MHz
- Wide supply voltage range 2.5V to 22V
- Slew rate 12V/ μs
- Supply current/channel 1.15 mA
- Cap load limit Unlimited
- Output short circuit current +53mA/-75mA
- +/-5% Settling time 400ns (500pF, 100mV_{PP} step)
- Input common mode voltage 0.3V beyond rails
- Input voltage noise 15nV/ \sqrt{Hz}
- Input current noise 1pA/ \sqrt{Hz}
- THD+N < 0.05%

Applications


- TFT-LCD flat panel V_{COM} driver
- A/D converter buffer
- High side/low side sensing
- Headphone amplifier

Output Response with Heavy Capacitive Load

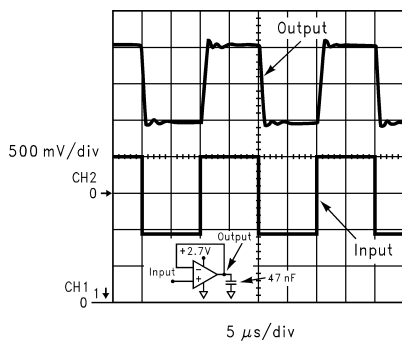

20021037

Connection Diagram

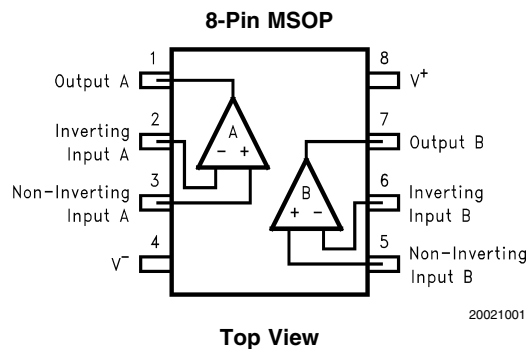

20021001

Ordering Information

| Package | Part Number | Package Marking | Media Transport | NSC Drawing |
|------------|-------------|-----------------|--------------------------|-------------|
| 8-Pin MSOP | LM8262MM | A46 | 1k Units Tape and Reel | MUA08A |
| | LM8262MMX | | 3.5k Units Tape and Reel | |

LM8262 Dual RRIO, High Output Current & Unlimited Cap Load Op Amp in MSOP

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|--|
| ESD Tolerance | 2KV (Note 2) 200V(Note 9) |
| V _{IN} Differential | +/-10V |
| Output Short Circuit Duration | (Notes 3, 11) |
| Supply Voltage (V ⁺ - V ⁻) | 24V |
| Voltage at Input/Output pins | V ⁺ +0.8V, V ⁻ -0.8V |
| Storage Temperature Range | -65°C to +150°C |
| Junction Temperature (Note 4) | +150°C |

Soldering Information:

| | |
|----------------------------------|-------|
| Infrared or Convection (20 sec.) | 235°C |
| Wave Soldering (10 sec.) | 260°C |

Operating Ratings

| | |
|--|-----------------------|
| Supply Voltage (V ⁺ - V ⁻) | 2.5V to 22V |
| Junction Temperature Range(Note 4) | -40°C to +85°C |
| Package Thermal Resistance, θ_{JA} , (Note 4) | 8-Pin MSOP 235°C/W |

2.7V Electrical Characteristics

Unless otherwise specified, all limits guaranteed for T_J = 25°C, V⁺ = 2.7V, V⁻ = 0V, V_{CM} = 0.5V, V_O = V⁺/2, and R_L > 1M Ω to V⁻. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|--------------------|---------------------------------------|---|---------------------|-----------------|-----------------------|-----------|
| V _{OS} | Input Offset Voltage | V _{CM} = 0.5V & V _{CM} = 2.2V | - | +/-0.7 | +/-5 +/-7 | mV |
| TC V _{OS} | Input Offset Average Drift | V _{CM} = 0.5V & V _{CM} = 2.2V (Note 12) | - | +/-2 | - | μ V/C |
| I _B | Input Bias Current | V _{CM} = 0.5V (Note 7) | - | -1.20 | -2.00 -2.70 | μ A |
| | | V _{CM} = 2.2V (Note 7) | - | +0.49 | +1.00 +1.60 | |
| I _{OS} | Input Offset Current | V _{CM} = 0.5V & V _{CM} = 2.2V | - | 20 | 250 400 | nA |
| CMRR | Common Mode Rejection Ratio | V _{CM} stepped from 0V to 1.0V | 76 60 | 100 | - | dB |
| | | V _{CM} stepped from 1.7V to 2.7V | - | 100 | - | |
| | | V _{CM} stepped from 0V to 2.7V | 58 50 | 70 | - | |
| +PSRR | Positive Power Supply Rejection Ratio | V ⁺ = 2.7V to 5V | 78 74 | 104 | - | dB |
| CMVR | Input Common-Mode Voltage Range | CMRR > 50dB | - | -0.3 | -0.1 0.0 | V |
| | | | 2.8 2.7 | 3.0 | - | V |
| A _{VOL} | Large Signal Voltage Gain | V _O = 0.5 to 2.2V, R _L = 10k to V ⁻ | 70 67 | 78 | - | dB |
| | | V _O = 0.5 to 2.2V, R _L = 2k to V ⁻ | 67 63 | 73 | - | dB |
| V _O | Output Swing High | R _L = 10k to V ⁻ | 2.49 2.46 | 2.59 | - | V |
| | | R _L = 2k to V ⁻ | 2.45 2.41 | 2.53 | - | |
| | Output Swing Low | R _L = 10k to V ⁻ | - | 90 | 100 120 | mV |
| I _{SC} | Output Short Circuit Current | Sourcing to V ⁻ V _{ID} = 200mV (Note 10) | 30 20 | 48 | - | mA |
| | | Sinking to V ⁺ V _{ID} = -200mV (Note 10) | 50 30 | 65 | - | |

2.7V Electrical Characteristics (Continued)

Unless otherwise specified, all limits guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = 0.5\text{V}$, $V_O = V^+/2$, and $R_L > 1\text{M}\Omega$ to V^- . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|-------------------|------------------------------|---|-------------------|-----------------|-------------------|------------------------|
| I_S | Supply Current (both amps) | No load, $V_{\text{CM}} = 0.5\text{V}$ | – | 2.0 | 2.5 3.0 | mA |
| SR | Slew Rate (Note 8) | $A_V = +1, V_I = 2V_{\text{PP}}$ | – | 9 | – | V/ μs |
| f_u | Unity Gain-Frequency | $V_I = 10\text{mV}$, $R_L = 2\text{k}\Omega$ to $V^+/2$ | – | 10 | – | MHz |
| GBWP | Gain Bandwidth Product | $f = 50\text{KHz}$ | 15.5 14 | 21 | – | MHz |
| Φ_{m} | Phase Margin | $V_I = 10\text{mV}$ | – | 50 | – | Deg |
| e_n | Input-Referred Voltage Noise | $f = 2\text{KHz}$, $R_S = 50\Omega$ | – | 15 | – | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input-Referred Current Noise | $f = 2\text{KHz}$ | – | 1 | – | pA/ $\sqrt{\text{Hz}}$ |
| f_{max} | Full Power Bandwidth | $Z_L = (20\text{pF} \parallel 10\text{k}\Omega)$ to $V^+/2$ | – | 1 | – | MHz |

5V Electrical Characteristics

Unless otherwise specified, all limited guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = 1\text{V}$, $V_O = V^+/2$, and $R_L > 1\text{M}\Omega$ to V^- . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|--------------------|---------------------------------------|--|---------------------|-----------------|-----------------------|------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = 1\text{V}$ & $V_{\text{CM}} = 4.5\text{V}$ | – | +/-0.7 | +/-5 +/- 7 | mV |
| TC V_{OS} | Input Offset Average Drift | $V_{\text{CM}} = 1\text{V}$ & $V_{\text{CM}} = 4.5\text{V}$ (Note 12) | – | +/-2 | – | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | $V_{\text{CM}} = 1\text{V}$ (Note 7) | – | -1.18 | -2.00 -2.70 | μA |
| | | $V_{\text{CM}} = 4.5\text{V}$ (Note 7) | – | +0.49 | +1.00 +1.60 | |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = 1\text{V}$ & $V_{\text{CM}} = 4.5\text{V}$ | – | 20 | 250 400 | nA |
| CMRR | Common Mode Rejection Ratio | V_{CM} stepped from 0V to 3.3V | 84 72 | 110 | – | dB |
| | | V_{CM} stepped from 4V to 5V | – | 100 | – | |
| | | V_{CM} stepped from 0V to 5V | 64 61 | 80 | – | |
| +PSRR | Positive Power Supply Rejection Ratio | $V^+ = 2.7\text{V}$ to 5V, $V_{\text{CM}} = 0.5\text{V}$ | 78 74 | 104 | – | dB |
| CMVR | Input Common-Mode Voltage Range | CMRR > 50dB | – | -0.3 | -0.1 0.0 | V |
| | | | 5.1 5.0 | 5.3 | – | V |
| A_{VOL} | Large Signal Voltage Gain | $V_O = 0.5$ to 4.5V, $R_L = 10\text{k}$ to V^- | 74 70 | 84 | – | dB |
| | | $V_O = 0.5$ to 4.5V, $R_L = 2\text{k}$ to V^- | 70 66 | 80 | – | |
| V_O | Output Swing High | $R_L = 10\text{k}$ to V^- | 4.75 4.72 | 4.87 | – | V |
| | | $R_L = 2\text{k}$ to V^- | 4.70 4.66 | 4.81 | – | |
| | Output Swing Low | $R_L = 10\text{k}$ to V^- | – | 86 | 125 135 | mV |

5V Electrical Characteristics (Continued)

Unless otherwise specified, all limited guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = 1\text{V}$, $V_O = V^+/2$, and $R_L > 1\text{M}\Omega$ to V^- . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|------------------|-----------------------------------|---|-----------------|-----------------|-------------------|------------------------|
| I_{SC} | Output Short Circuit Current | Sourcing to V^- $V_{\text{ID}} = 200\text{mV}$ (Note 10) | 35 20 | 53 | – | mA |
| | | Sinking to V^+ $V_{\text{ID}} = -200\text{mV}$ (Note 10) | 60 50 | 75 | – | |
| I_{S} | Supply Current (both amps) | No load, $V_{\text{CM}} = 1\text{V}$ | – | 2.3 | 2.8 3.5 | mA |
| SR | Slew Rate (Note 8) | $A_V = +1$, $V_I = 5V_{\text{PP}}$ | 10 7 | 12 | – | V/ μs |
| f_u | Unity Gain Frequency | $V_I = 10\text{mV}$, $R_L = 2\text{k}\Omega$ to $V^+/2$ | – | 10.5 | – | MHz |
| GBWP | Gain-Bandwidth Product | $f = 50\text{KHz}$ | 16 15 | 21 | – | MHz |
| Phi_m | Phase Margin | $V_I = 10\text{mV}$ | – | 53 | – | Deg |
| e_n | Input-Referred Voltage Noise | $f = 2\text{KHz}$, $R_S = 50\Omega$ | – | 15 | – | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input-Referred Current Noise | $f = 2\text{KHz}$ | – | 1 | – | pA/ $\sqrt{\text{Hz}}$ |
| f_{max} | Full Power Bandwidth | $Z_L = (20\text{pF} \parallel 10\text{k}\Omega)$ to $V^+/2$ | – | 900 | – | KHz |
| t_s | Settling Time (+/-5%) | 100mV _{PP} Step, 500pF load | – | 400 | – | ns |
| THD+N | Total Harmonic Distortion + Noise | $R_L = 1\text{k}\Omega$ to $V^+/2$ $f = 10\text{KHz}$ to $A_V = +2$, 4V _{PP} swing | – | 0.05 | – | % |

+/-11V Electrical Characteristics

Unless otherwise specified, all limited guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 11\text{V}$, $V^- = -11\text{V}$, $V_{\text{CM}} = 0\text{V}$, $V_O = 0\text{V}$, and $R_L > 1\text{M}\Omega$ to 0V . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|--------------------|---------------------------------------|---|-----------------|-----------------|-----------------------|------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = -10.5\text{V}$ & $V_{\text{CM}} = 10.5\text{V}$ | – | +/-0.7 | +/-7 +/- 9 | mV |
| TC V_{OS} | Input Offset Average Drift | $V_{\text{CM}} = -10.5\text{V}$ & $V_{\text{CM}} = 10.5\text{V}$ (Note 12) | – | +/-2 | – | $\mu\text{V}/^\circ\text{C}$ |
| I_{B} | Input Bias Current | $V_{\text{CM}} = -10.5\text{V}$ (Note 7) | – | -1.05 | -2.00 -2.80 | μA |
| | | $V_{\text{CM}} = 10.5\text{V}$ (Note 7) | – | +0.49 | +1.00 +1.50 | |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = -10.5\text{V}$ & $V_{\text{CM}} = 10.5\text{V}$ | – | 30 | 275 550 | nA |
| CMRR | Common Mode Rejection Ratio | V_{CM} stepped from -11V to 9V | 84 80 | 100 | – | dB |
| | | V_{CM} stepped from 10V to 11V | – | 100 | – | |
| | | V_{CM} stepped from -11V to 11V | 74 72 | 88 | – | |
| +PSRR | Positive Power Supply Rejection Ratio | $V^+ = 9\text{V}$ to 11V | 70 66 | 100 | – | dB |
| -PSRR | Negative Power Supply Rejection Ratio | $V^- = -9\text{V}$ to -11V | 70 66 | 100 | – | dB |

+/-11V Electrical Characteristics (Continued)

Unless otherwise specified, all limited guaranteed for $T_J = 25^\circ\text{C}$, $V^+ = 11\text{V}$, $V^- = -11\text{V}$, $V_{\text{CM}} = 0\text{V}$, $V_O = 0\text{V}$, and $R_L > 1\text{M}\Omega$ to 0V . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Condition | Min (Note 6) | Typ (Note 5) | Max (Note 6) | Units |
|-------------------|--|--|-----------------------|-----------------|-------------------------|------------|
| CMVR | Input Common-Mode Voltage Range | CMRR > 50dB | – | –11.3 | –11.1 –11.0 | V |
| | | | 11.1 11.0 | 11.3 | – | V |
| A _{VOL} | Large Signal Voltage Gain | V _O = 0V to +/-9V, R _L = 10kΩ | 78 74 | 85 | – | dB |
| | | V _O = 0V to +/-9V, R _L = 2kΩ | 72 66 | 79 | – | |
| V _O | Output Swing High | R _L = 10kΩ | 10.65 10.61 | 10.77 | – | V |
| | | R _L = 2kΩ | 10.6 10.55 | 10.69 | – | |
| | Output Swing Low | R _L = 10kΩ | – | –10.98 | –10.75 –10.65 | V |
| | | R _L = 2kΩ | – | –10.91 | –10.65 –10.6 | |
| I _{SC} | Output Short Circuit Current | Sourcing to ground V _{ID} = 200mV (Note 10) | 40 25 | 60 | – | mA |
| | | Sinking to ground V _{ID} = 200mV (Note 10) | 65 55 | 100 | – | |
| I _S | Supply Current | No load, V _{CM} = 0V | – | 2.5 | 4 5 | mA |
| SR | Slew Rate (Note 8) | A _V = +1, V _I = 16V _{PP} | 10 8 | 15 | – | V/μs |
| f _U | Unity Gain Frequency | V _I = 10mV, R _L = 2kΩ | – | 13 | – | MHz |
| GBWP | Gain-Bandwidth Product | f = 50KHz | 18 16 | 24 | – | MHz |
| Phi _m | Phase Margin | V _I = 10mV | – | 58 | – | Deg |
| e _n | Input-Referred Voltage Noise | f = 2KHz, R _S = 50Ω | – | 15 | – | nV/ √Hz |
| i _n | Input-Referred Current Noise | f = 2KHz | – | 1 | – | pA/ √Hz |
| t _S | Settling Time (+/-1%, A _V = +1) | Positive Step, 5V _{PP} | – | 320 | – | ns |
| | | Negative Step, 5V _{PP} | – | 600 | – | |
| THD+N | Total Harmonic Distortion +Noise | R _L = 1kΩ, f = 10KHz, A _V = +2, 15V _{PP} swing | – | 0.01 | – | % |
| CT _{REJ} | Cross-Talk Rejection | f = 5MHz, Driver R _L = 10kΩ | – | 68 | – | dB |

+/-11V Electrical Characteristics (Continued)

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Rating indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

Note 2: Human body model, 1.5kΩ in series with 100pF.

Note 3: Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

Note 4: The maximum power dissipation is a function of $T_J(\text{max})$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_J(\text{max}) - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC board.

Note 5: Typical Values represent the most likely parametric norm.

Note 6: All limits are guaranteed by testing or statistical analysis.

Note 7: Positive current corresponds to current flowing into the device.

Note 8: Slew rate is the slower of the rising and falling slew rates. Connected as a Voltage Follower.

Note 9: Machine Model, 0Ω in series with 200pF.


Note 10: Short circuit test is a momentary test. See Note 11.

Note 11: Output short circuit duration is infinite for $V_S \leq 6V$ at room temperature and below. For $V_S > 6V$, allowable short circuit duration is 1.5ms.


Note 12: Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

Typical Performance Characteristics $T_A = 25^\circ\text{C}$, Unless Otherwise Noted


V_{OS} vs. V_{CM} for 3 Representative Units

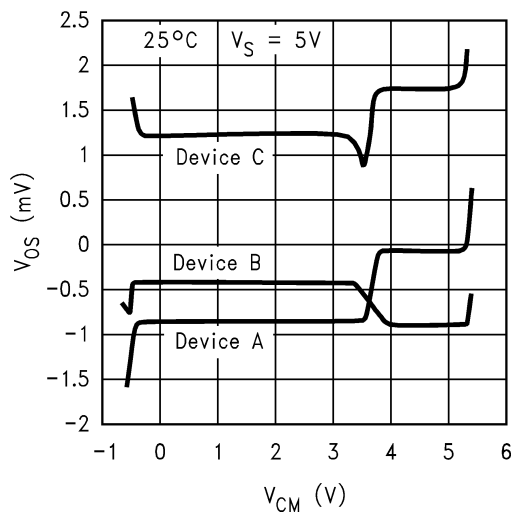


V_{OS} vs. V_{CM} for 3 Representative Units

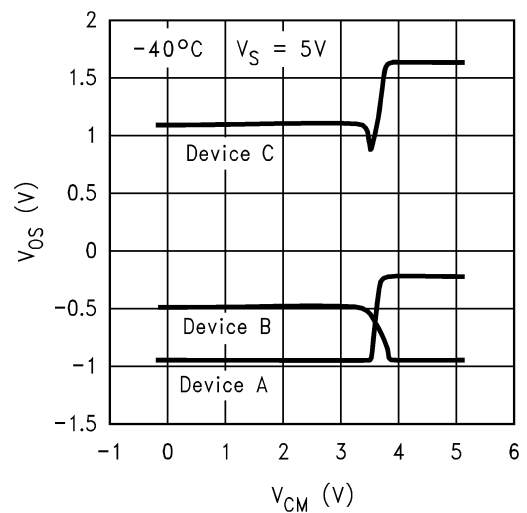


V_{OS} vs. V_{CM} for 3 Representative Units

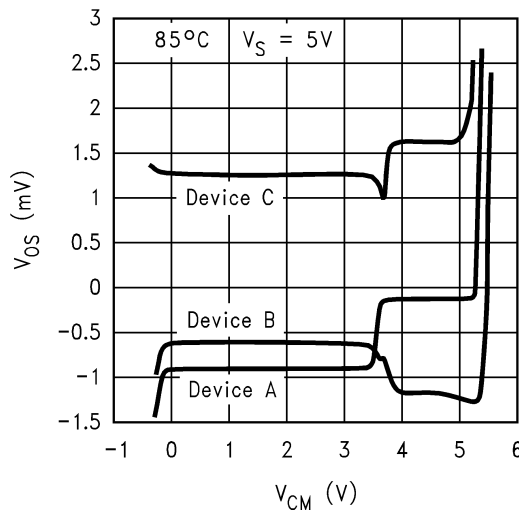


V_{OS} vs. V_S for 3 Representative Units

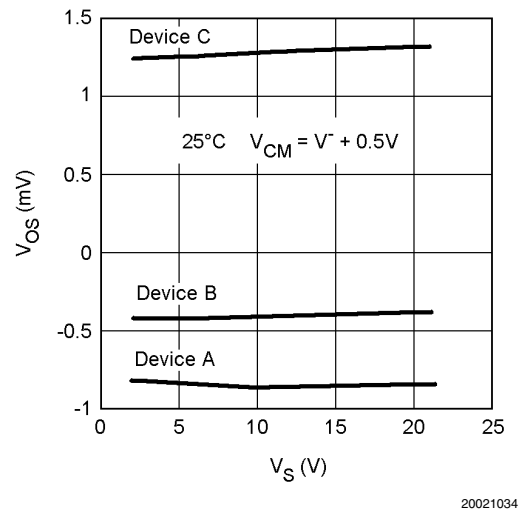


Typical Performance Characteristics $T_A = 25^\circ\text{C}$, Unless Otherwise Noted (Continued)

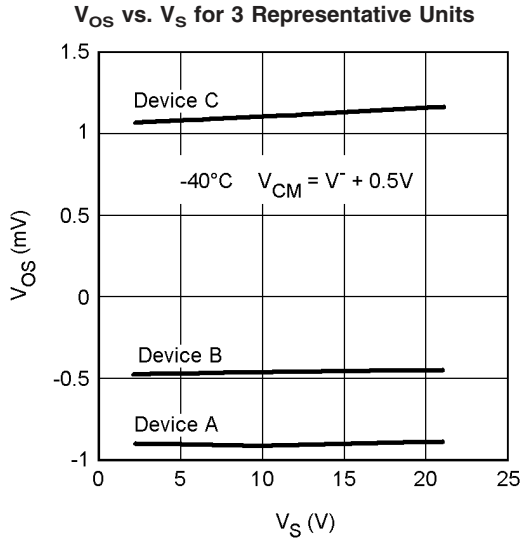


20021035

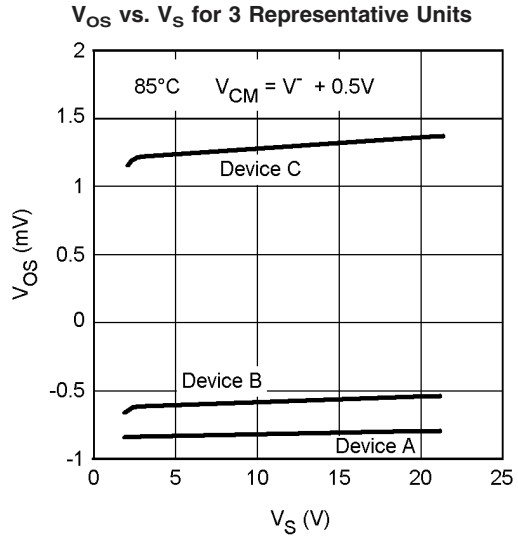


20021033

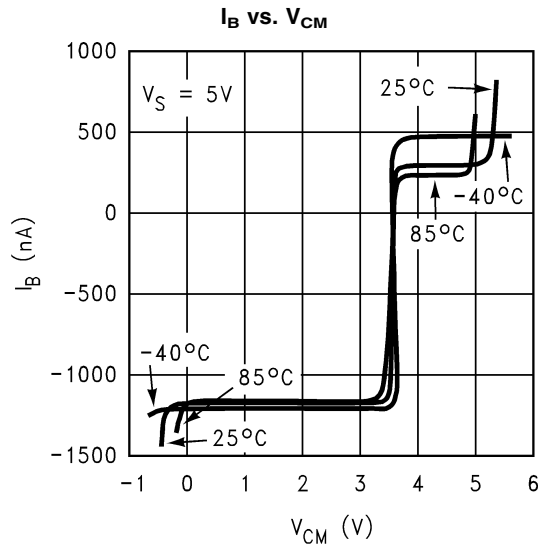


20021024

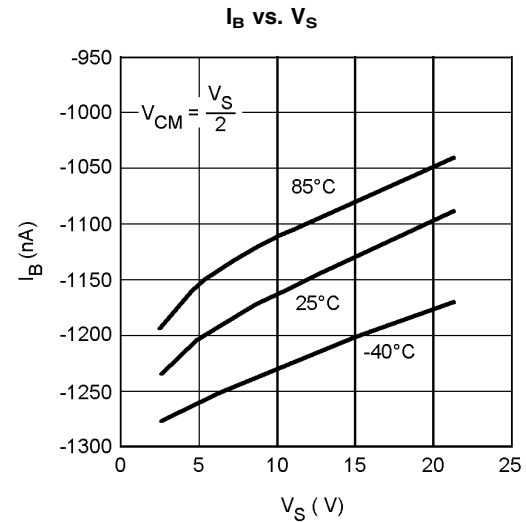

20021036






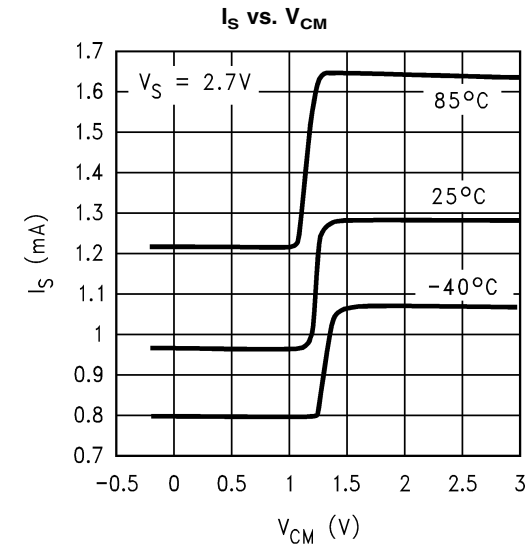


20021027

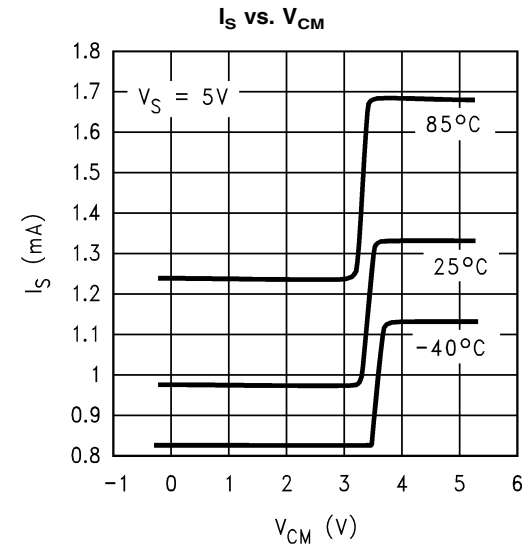


20021028

Typical Performance Characteristics $T_A = 25^\circ\text{C}$, Unless Otherwise Noted (Continued)

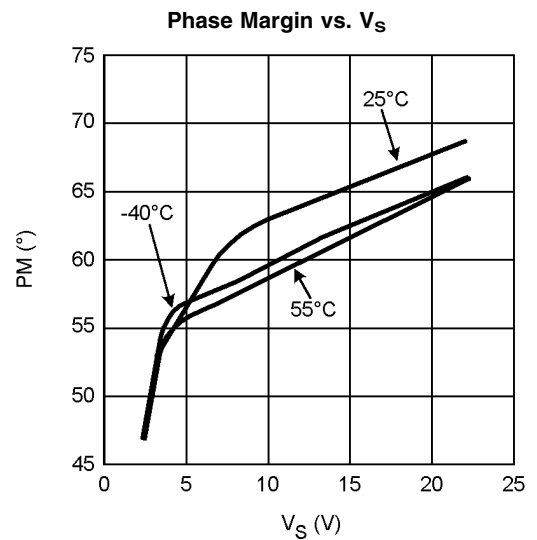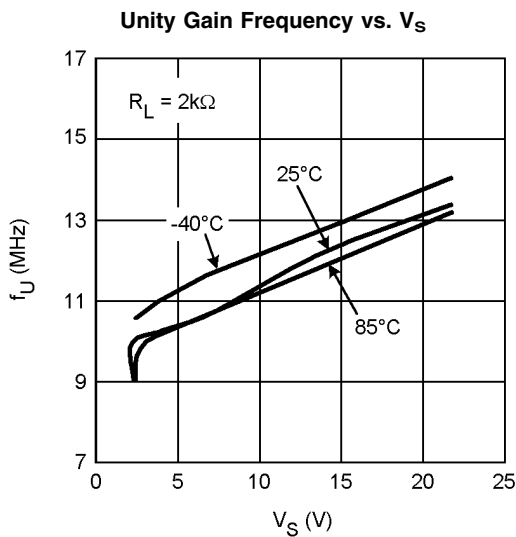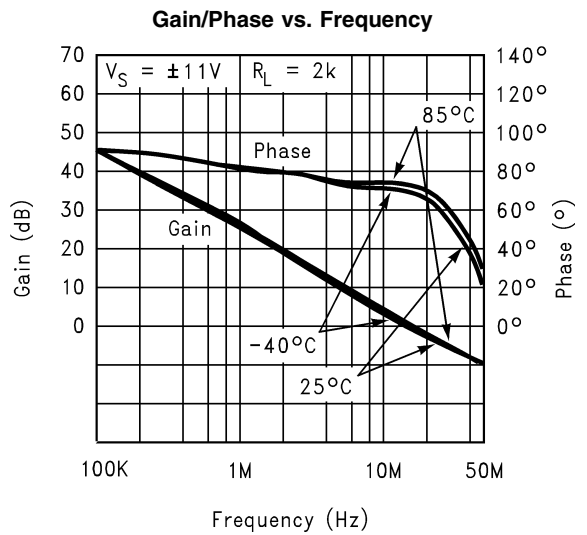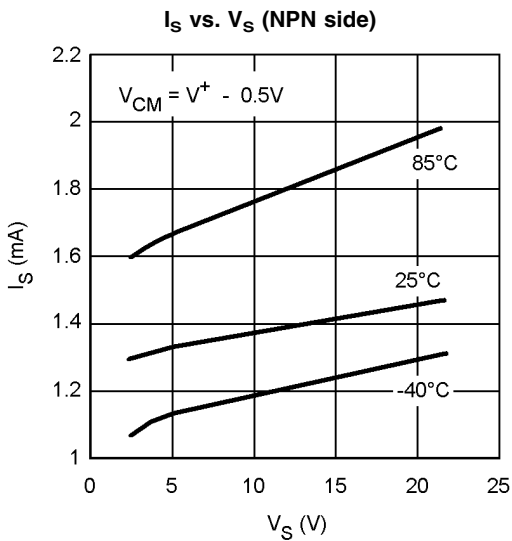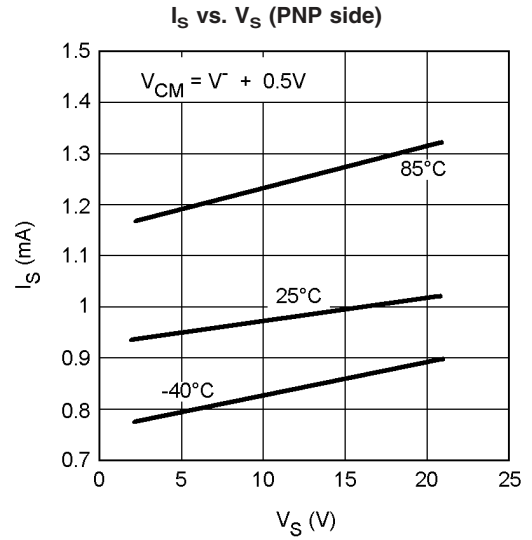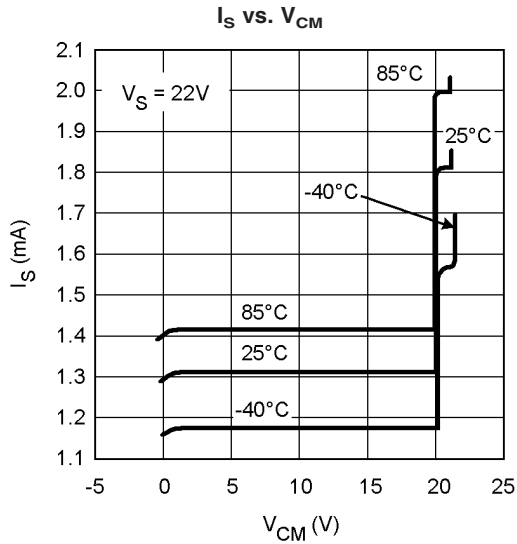


Typical Performance Characteristics $T_A = 25^\circ\text{C}$, Unless Otherwise Noted (Continued)

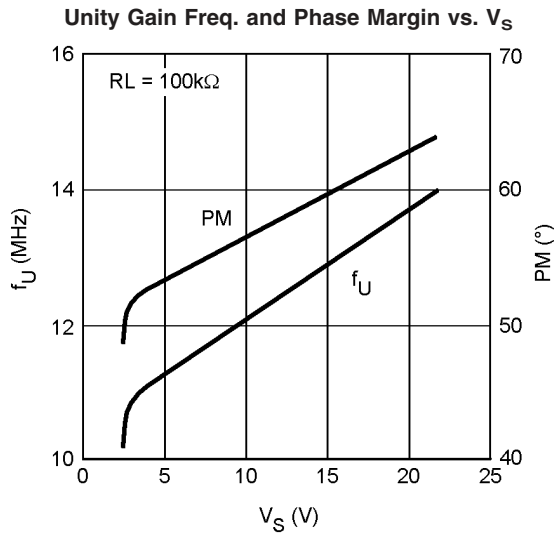

20021004

Physical Dimensions inches (millimeters)

unless otherwise noted

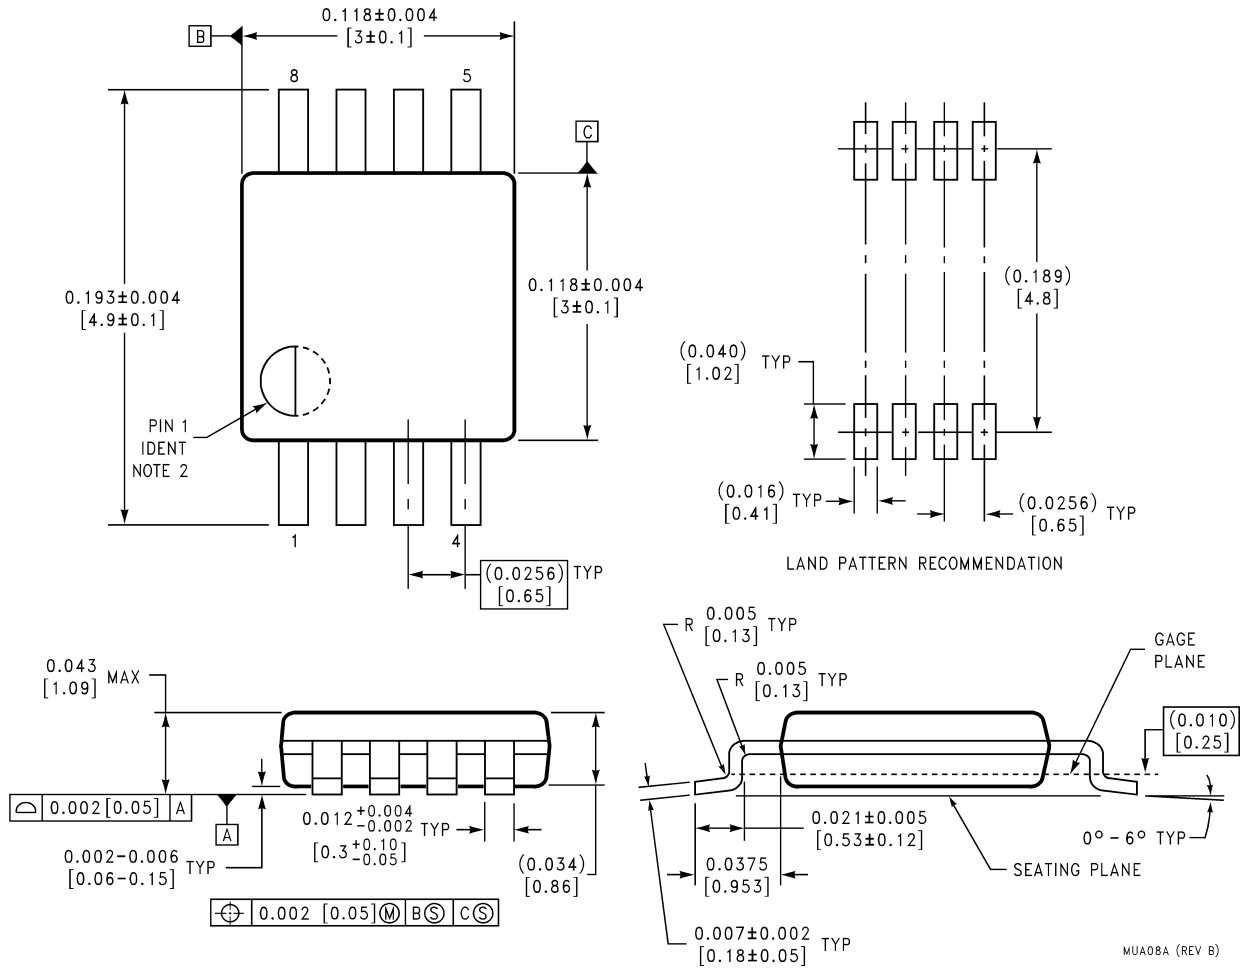

8-Pin MSOP
NS Package Number MUA08A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507