

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 02/01/07	~	LJC 02/01/07
B	整理圖面	YCH 08/15/07	~	


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30mΩ Max.INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE:1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
  - DURABILITY: 300 CYCLES.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE RANGE: -45°C~+105°C.
- PRODUCT NUMBER CODE:


DS1036 - XX X X X X X X

- RIVET TYPE
- P:W/ THREAD(UNC #4-40)
- N:W/O THREAD
- CONTACT PLATING
- Si: SELECTIVE GOLD FLASH
- HOUSING COLOR
- U:BLUE
- B:BLACK
- STRAIN RELIEF
- P:W/
- N:W/O
- CONNECTOR TYPE
- M:MALE
- F:FEMALE
- No.OF CONTACTS
- 09:9pos
- 15:15pos
- 25:25pos
- 37:37pos


Position	A±0.1	B±0.2	C±0.2	D±0.2		E±0.2
				Male	Female	
9P	10.16	30.80	24.99	17.90	16.33	19.00
15P	17.78	39.14	33.32	26.50	24.66	27.34
25P	30.48	53.04	47.04	40.00	38.38	41.24
37P	45.72	69.32	63.50	56.50	54.84	57.52

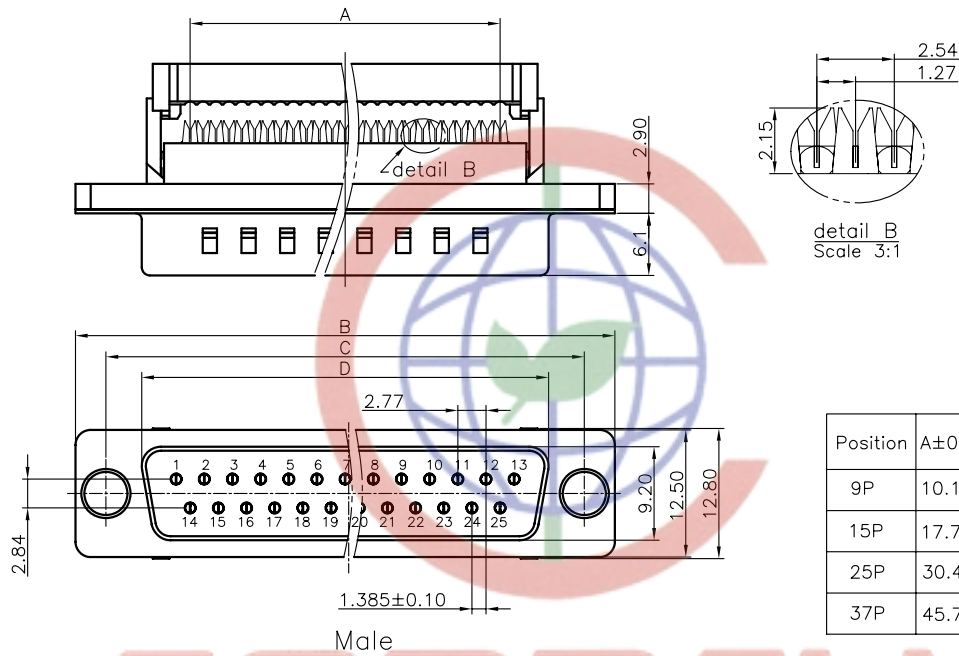

Male

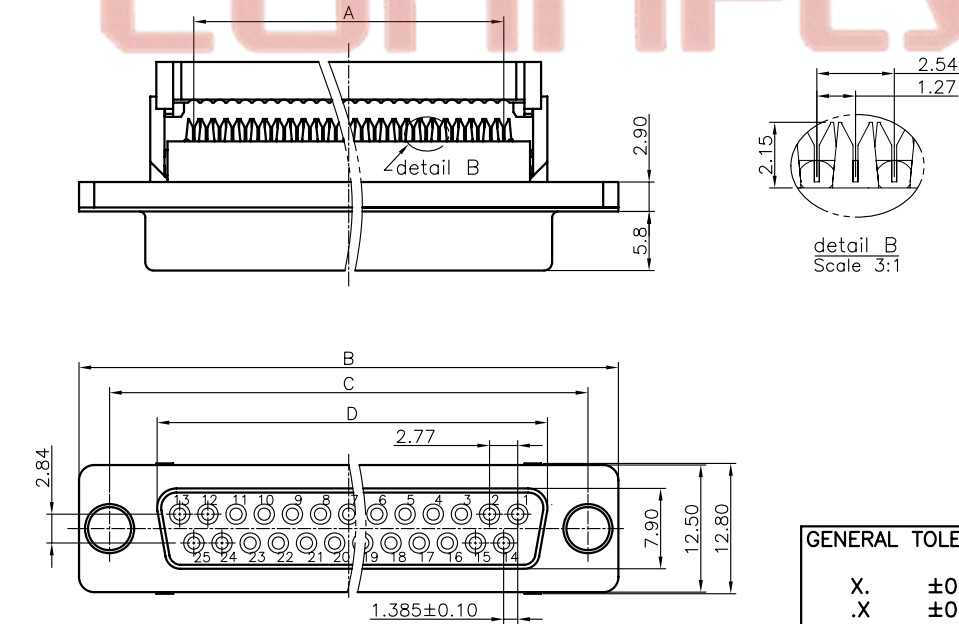

Female

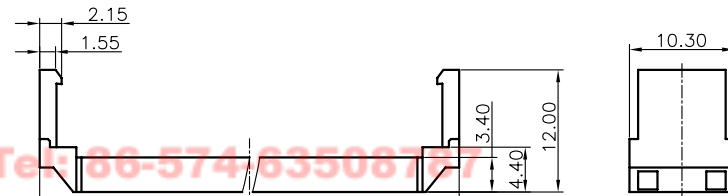

UPPER COVER

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±3°	mm	I.D.C D-SUB
.X	±0.38	.X	±2°	A4	SERIES DS1036 SERIES
.XX	±0.25	.XX	±1°		
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1036-XXXXXXX				

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD