

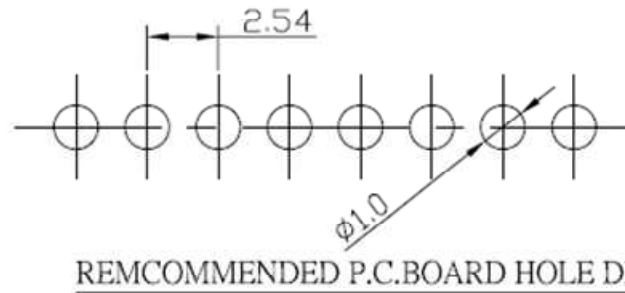
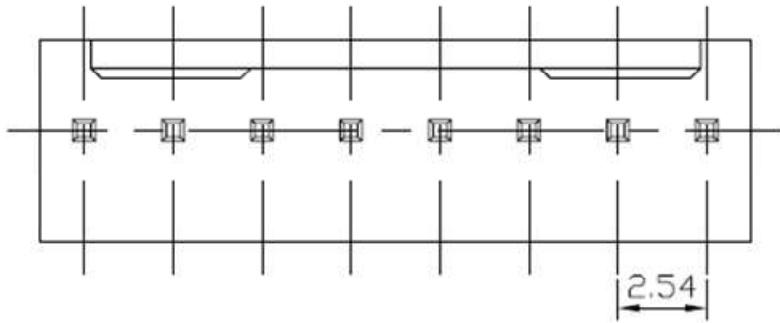
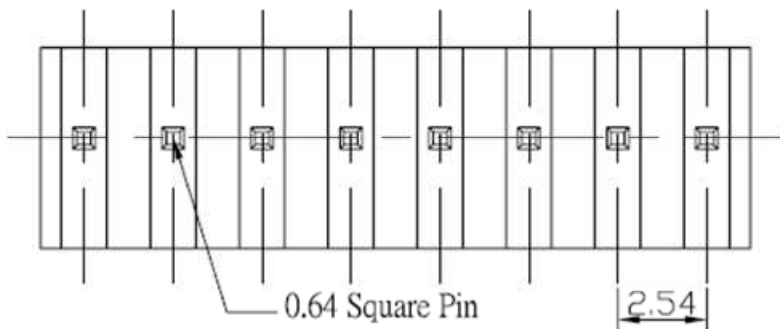


## Specifications


Current Rating: 3A AC, DC  
 Voltage Rating: 250 AC Maximum  
 Operating Temp: -25°C ~ + 85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Terminal Material: Brass/ Tin-plated  
 Material: Nylon 66, UL94V-2

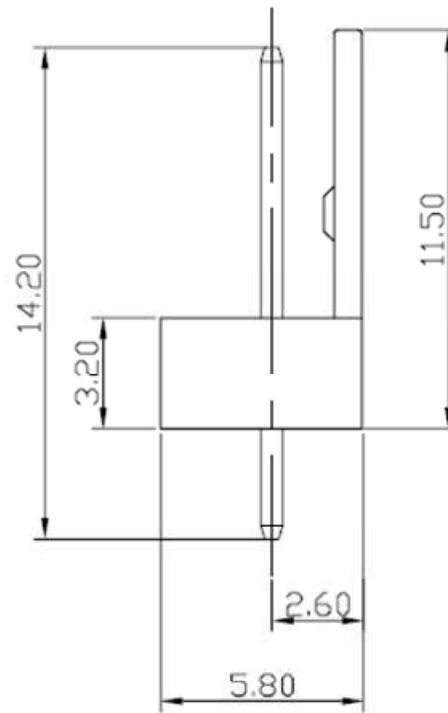

RECOMMENDED P.C.BOARD HOLE DIMM.

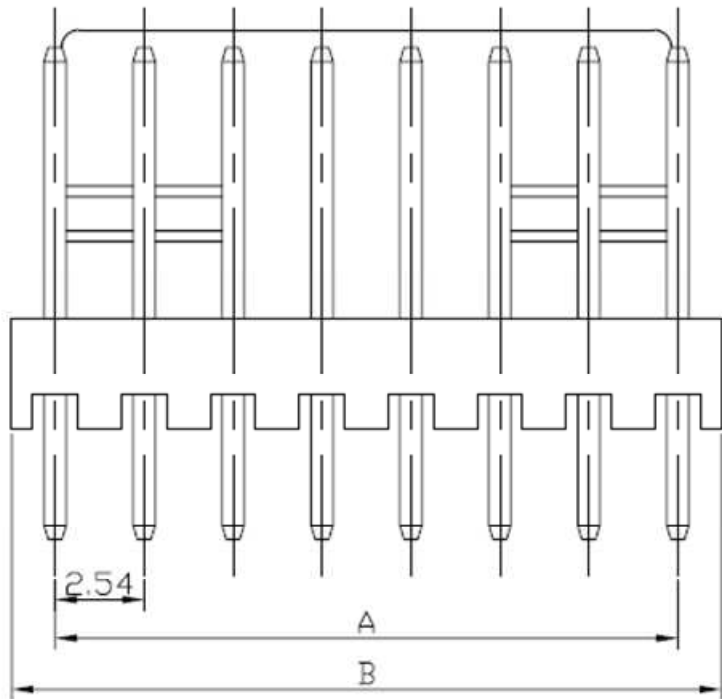

Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.54(0.100)	5.12(0.202)	WF 02M
3	5.08(0.200)	7.66(0.302)	WF 03M
4	7.62(0.300)	10.20(0.402)	WF 04M
5	10.16(0.400)	12.74(0.502)	WF 05M
6	12.70(0.500)	15.30(0.602)	WF 06M
7	15.24(0.600)	17.94(0.706)	WF 07M
8	17.78(0.700)	20.48(0.806)	WF 08M
9	20.32(0.800)	23.02(0.906)	WF 09M
10	22.86(0.900)	25.58(1.007)	WF 10M
11	25.40(1.000)	28.12(1.107)	WF 11M
12	27.94(1.100)	30.68(1.208)	WF 12M
13	30.48(1.200)	33.10(1.303)	WF 13M
14	33.02(1.300)	35.80(1.409)	WF 14M
15	35.56(1.400)	38.34(1.509)	WF 15M
16	38.10(1.500)	40.94(1.612)	WF 16M
17	40.64(1.600)	43.30(1.705)	WF 17M
18	43.18(1.700)	45.90(1.807)	WF 18M
19	45.72(1.800)	48.56(1.912)	WF 19M
20	48.26(1.900)	50.80(2.000)	WF 20M

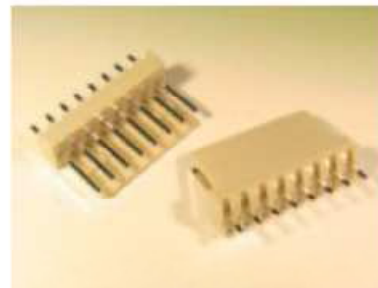

## RoHS Compliant

TOLERANCES ARE

X ±  
 .X ± 0.50  
 .XX ± 0.10  
 .XXX ±  
 ANG ±