
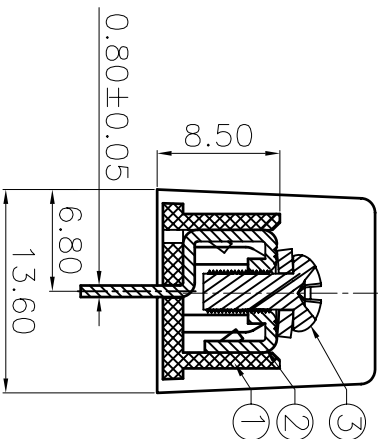


NOTES:

1. Pitch: 8.25mm, Poles: 2P-26P
2. Rated voltage/current: UL 300V/20A
IEC 450V/32A
3. Operation temperatures: -40° C ~ +105° C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 500MΩ /DC500V
6. Wire Range: 22-12AWG, 4.0mm²
7. Max. Torque Value: M3, 5.10Kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range					
	over	over	over	over	over	over
6	10	30	60	100	150	∩
to	to	to	to	to	to	
e	10	24	30	60	100	∇
to	to	to	to	to	to	
∅0.10	∅0.15	∅0.25	∅0.2±0.3	∅0.5±0.7	∅1.0±0.10	∅0.05/0

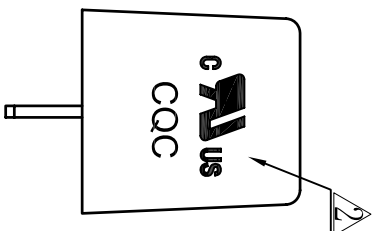

SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	3*6(6*6) bright-Screw	S000000450(H)	XX	Steel	Ni Plated
2	DG25C-Pin Header	5001B00010(H)	XX	Brass	SnCe
1	DG35C-B-Housing	5002A0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS	
MM	(INCH)
0 ±	±
.00 ±	±
.000 ±	±
TOLERANCES EXCEPT AS NOTED	
DATE	DATE
CHKD	DATE
APP'D	DATE
MATERIAL:	
G.E.:	
FINISH:	
SCALE: 1:1	
THIRD ANGLE PROJECTION	

宁波高正电子有限公司 DEGSON® DEGSON ELECTRONICS CO., LTD.	
NAME DG35C-B-XXP-1Y-00A(H)	
DRAWING NO. DG35C-E07	
/PART NO.	
SIZE A3	REV T4
DO NOT SCALE DRAWING	
SHEET 1	OF 1

REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT DATE
△		图面整理	CSX 12/23/05
△		增加U刻字	CSX 06/05/06
△		修改脚宽	CSX 09/21/06
△		工程变更:品名商标更改到侧面	WLM 07/19/08