


## Glass Passivated Single-Phase Bridge Rectifier

### FEATURES

- UL Recognized File # E-326243
- Ideal for printed circuit board
- High case dielectric strength of 1500 VRMS
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



GBU



### MECHANICAL DATA


**Case :** GBU

Molding compound, UL flammability classification rating 94V-0  
Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant

**Terminal :** Matte tin plated leads, solderable per JESD22-B102

**Polarity :** As marked

**Weight :** 4 gram (approximately)



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted)									
PARAMETER	SYMBOL	GBU 401	GBU 402	GBU 403	GBU 404	GBU 405	GBU 406	GBU 407	UNIT
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	I <sub>F(AV)</sub>	4							A
Peak forward surge current, 8.3 ms single half sine-wave	T <sub>J</sub> = 25°C	150							A
	T <sub>J</sub> = 125°C	80							
Peak forward surge current, 1.0 ms single half sine-wave	T <sub>J</sub> = 25°C	280							A
	T <sub>J</sub> = 125°C	260							
Rating of fusing ( t<8.3ms)	I <sup>2</sup> T	93							A <sup>2</sup> S
Maximum Instantaneous Forward Voltage (Note 1) IF= 2 A IF= 4 A	V <sub>F</sub>	1.0 1.1							V
Maximum reverse current @ rated VR T <sub>A</sub> =25 °C T <sub>A</sub> =125 °C	I <sub>R</sub>	5							μA
		500							
Typical junction capacitance per leg (Note 2)	C <sub>j</sub>	100			45				pF
Typical thermal resistance	R <sub>θJC</sub>	4							°C/W
	R <sub>θJA</sub>	20							
Operating junction temperature range	T <sub>J</sub>	- 55 to + 150							°C
Storage temperature range	T <sub>STG</sub>	- 55 to + 150							°C

Note 1 : Pulse test with PW=300u sec, 1% duty cycle

Note 2 : Measured at 1MHz and applied Reverse bias of 4.0V DC

ORDERING INFORMATION				
PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
GBU40x (Note 1)	C2	Suffix "G"	GBU	25 / Tube

Note 1: "x" defines voltage from 50V (GBU401) to 1000V (GBU407)

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
GBU406 C2	GBU406	C2		
GBU406 C2G	GBU406	C2	G	Green compound

**RATINGS AND CHARACTERISTICS CURVES**

(TA=25°C unless otherwise noted)

FIG. 1 FORWARD CURRENT DERATING CURVE

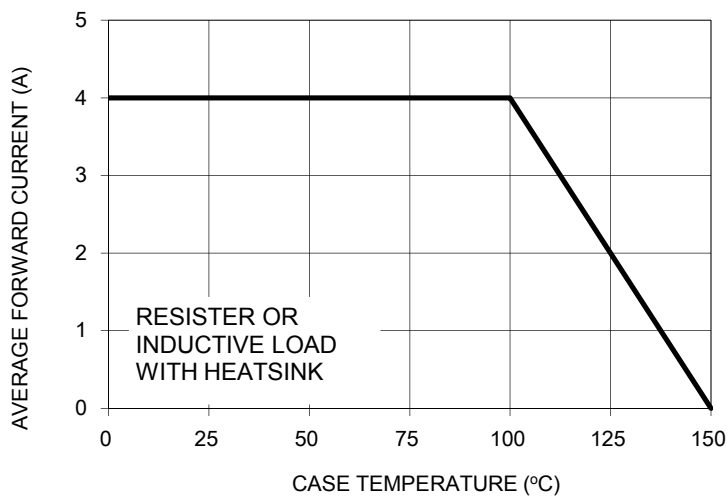


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

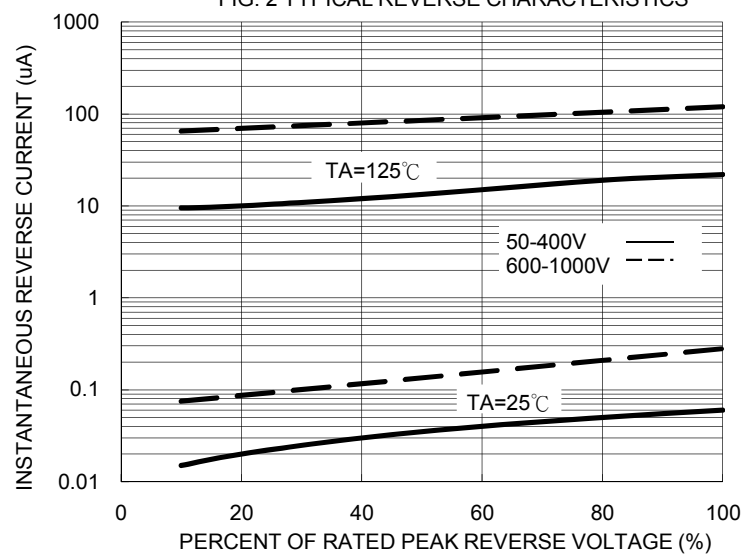


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

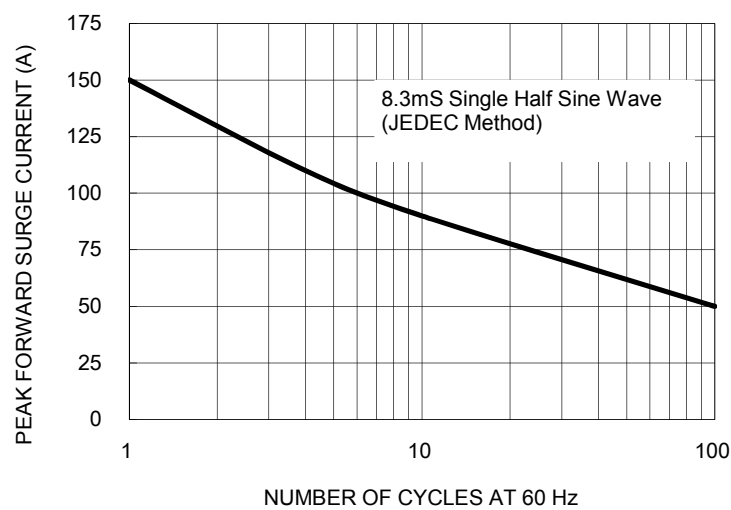


FIG. 4 TYPICAL FORWARD CHARACTERISTICS



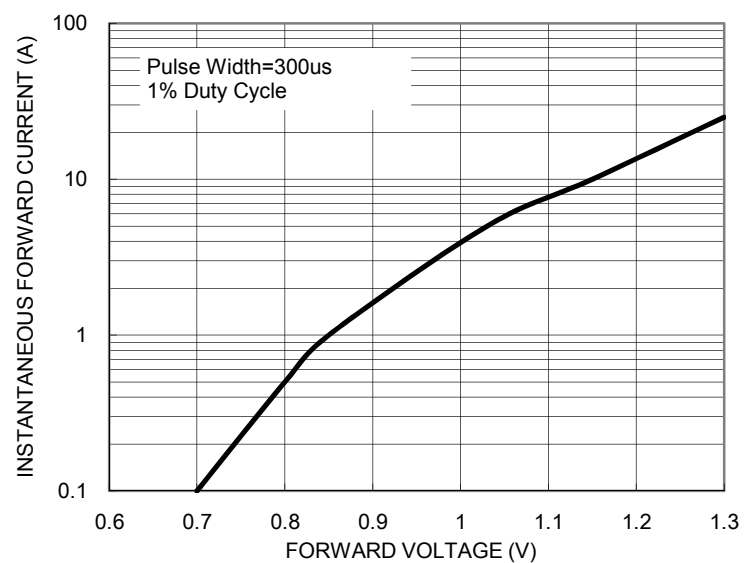


FIG. 5 TYPICAL JUNCTION CAPACITANCE

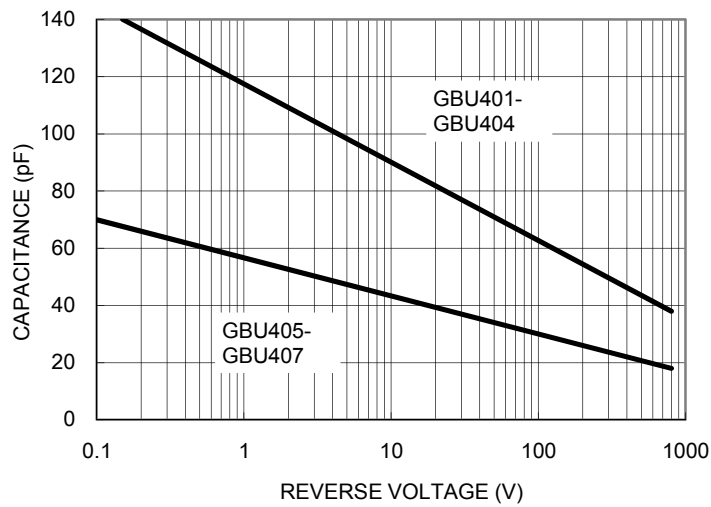

PACKAGE OUTLINE DIMENSIONS

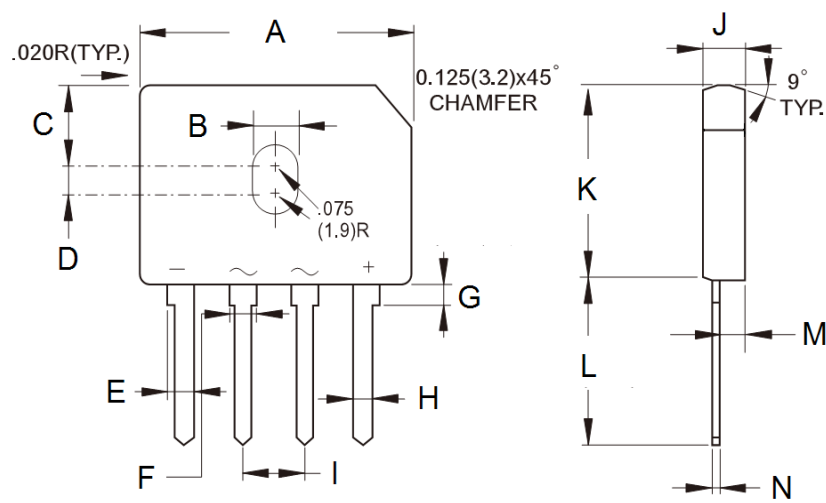

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	21.80	22.30	0.858	0.878
B	3.50	4.10	0.138	0.161
C	7.40	7.90	0.291	0.311
D	1.65	2.16	0.065	0.085
E	2.16	2.54	0.085	0.100
F	1.65	2.03	0.065	0.080
G	1.52	2.03	0.060	0.080
H	1.02	1.27	0.040	0.050
I	4.83	5.33	0.190	0.210
J	3.30	3.56	0.130	0.140
K	18.30	18.80	0.720	0.740
L	17.50	18.00	0.689	0.709
M	1.90	2.16	0.075	0.085
N	0.46	0.56	0.018	0.022

MARKING DIAGRAM



- P/N = Specific Device Code
- G = Green Compound
- YW = Date Code
- F = Factory Code