
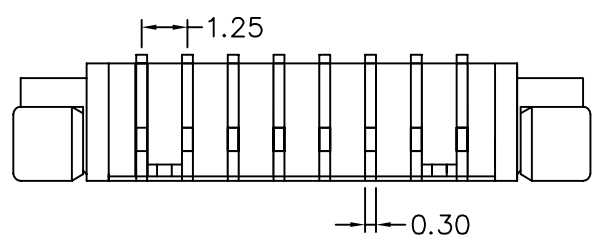



Recommended P.C.Board Pattern Dim.

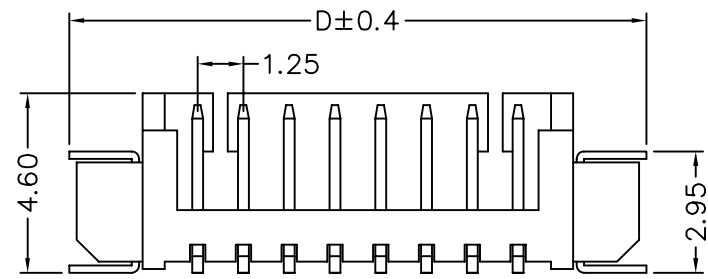

SPECIFICATIONS
 Insulator : High Temperature Plastic
 Nylon 46, UL94V-0
 Contact: High Strength Brass With Tin
 Over Nickel Plated
 Fitting Nail: Brass With Tin Plated

| CKT | A | B | C | D |
|-----|-------|-------|-------|-------|
| 2 | 1.25 | 3.05 | 4.25 | 7.65 |
| 3 | 2.50 | 4.30 | 5.50 | 8.90 |
| 4 | 3.75 | 5.55 | 6.75 | 10.15 |
| 5 | 5.00 | 6.80 | 8.00 | 11.40 |
| 6 | 6.25 | 8.05 | 9.25 | 12.65 |
| 7 | 7.50 | 9.30 | 10.50 | 13.90 |
| 8 | 8.75 | 10.56 | 11.75 | 15.15 |
| 9 | 10.00 | 11.80 | 13.00 | 16.40 |
| 10 | 11.25 | 13.05 | 14.25 | 17.65 |
| 11 | 12.50 | 14.30 | 15.50 | 18.90 |
| 12 | 13.75 | 15.55 | 16.75 | 20.15 |
| 13 | 15.00 | 16.80 | 18.00 | 21.40 |
| 14 | 16.25 | 18.05 | 19.25 | 22.65 |
| 15 | 17.50 | 19.30 | 20.50 | 23.90 |

| | | | | | | | | | |
|-------------|------|-------------|---|--|------|-----------|-----|------|------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. | AREA | REVISIONS | CHK | DATE | |
| | | MEI | | | | | | | UNIT |
| | | CHECKED BY | | | | | | | |
| DRAWING BY | | REV. | A | | | | | | |
| SCALE | NONE | | | | | | | | |