

# FDD03(U) SERIES

DC - DC CONVERTER  
2 ~ 3W SINGLE & DUAL OUTPUT



## FDD03 - 05S4 x

BLANK : w/o SAFETY APPROVALS  
U : SAFETY APPROVALS

### FEATURES

- EFFICIENCY UP TO 79%
- 4:1 & 3:1 & 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 3 YEARS WARRANTY



EN 60950-1

### MODEL LIST

| MODEL NO. | INPUT VOLTAGE | INPUT CURRENT |        | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|-----------|---------------|---------------|--------|----------------|----------------|----------------|-------------|-------------|-----------------------|
|           |               | (typ.)        | (max.) |                |                |                |             |             |                       |

#### Single Output Models

|                 |           |        |        |           |          |        |     |     |              |
|-----------------|-----------|--------|--------|-----------|----------|--------|-----|-----|--------------|
| FDD03 - 05S(U)  | 20~60 VDC | 70 mA  | 180 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12S(U)  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15S(U)  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |
| FDD03 - 05S1(U) | 9~18 VDC  | 265 mA | 340 mA | 2 WATTS   | + 5 VDC  | 400 mA | 63% | 65% | 1000 $\mu$ F |
| FDD03 - 12S1(U) | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | + 12 VDC | 200 mA | 65% | 67% | 470 $\mu$ F  |
| FDD03 - 15S1(U) | 9~18 VDC  | 285 mA | 380 mA | 2.4 WATTS | + 15 VDC | 160 mA | 65% | 67% | 330 $\mu$ F  |
| FDD03 - 05S2(U) | 18~36 VDC | 155 mA | 200 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 67% | 69% | 1000 $\mu$ F |
| FDD03 - 12S2(U) | 18~36 VDC | 175 mA | 230 mA | 3 WATTS   | + 12 VDC | 250 mA | 70% | 72% | 470 $\mu$ F  |
| FDD03 - 15S2(U) | 18~36 VDC | 175 mA | 230 mA | 3 WATTS   | + 15 VDC | 200 mA | 70% | 72% | 330 $\mu$ F  |
| FDD03 - 05S3(U) | 36~72 VDC | 70 mA  | 100 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12S3(U) | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15S3(U) | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |
| FDD03 - 05S4(U) | 9~36 VDC  | 155 mA | 440 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 67% | 69% | 1000 $\mu$ F |
| FDD03 - 12S4(U) | 9~36 VDC  | 175 mA | 510 mA | 3 WATTS   | + 12 VDC | 250 mA | 70% | 72% | 470 $\mu$ F  |
| FDD03 - 15S4(U) | 9~36 VDC  | 175 mA | 510 mA | 3 WATTS   | + 15 VDC | 200 mA | 70% | 72% | 330 $\mu$ F  |
| FDD03 - 05S5(U) | 18~72 VDC | 70 mA  | 200 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12S5(U) | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15S5(U) | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |

#### Dual Output Models

|                 |           |        |        |           |              |              |     |     |                   |
|-----------------|-----------|--------|--------|-----------|--------------|--------------|-----|-----|-------------------|
| FDD03 - 05D(U)  | 20~60 VDC | 70 mA  | 180 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 73% | 75% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D(U)  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 75% | 77% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15D(U)  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | $\pm$ 15 VDC | $\pm$ 100 mA | 75% | 77% | $\pm$ 22 $\mu$ F  |
| FDD03 - 05D1(U) | 9~18 VDC  | 265 mA | 340 mA | 2 WATTS   | $\pm$ 5 VDC  | $\pm$ 200 mA | 63% | 65% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D1(U) | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | $\pm$ 12 VDC | $\pm$ 100 mA | 65% | 67% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15D1(U) | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | $\pm$ 15 VDC | $\pm$ 80 mA  | 65% | 67% | $\pm$ 22 $\mu$ F  |
| FDD03 - 05D2(U) | 18~36 VDC | 155 mA | 200 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 66% | 68% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D2(U) | 18~36 VDC | 180 mA | 230 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 68% | 70% | $\pm$ 47 $\mu$ F  |

# FDD03(U) SERIES

SINGLE & DUAL OUTPUT

## MODEL LIST

| MODEL NO. | INPUT VOLTAGE | INPUT CURRENT |        | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|-----------|---------------|---------------|--------|----------------|----------------|----------------|-------------|-------------|-----------------------|
|           |               | (typ.)        | (max.) |                |                |                |             |             |                       |

### Dual Output Models

|                 |           |        |        |           |          |          |     |     |               |
|-----------------|-----------|--------|--------|-----------|----------|----------|-----|-----|---------------|
| FDD03 - 15D2(U) | 18~36 VDC | 180 mA | 230 mA | 3 WATTS   | ± 15 VDC | ± 100 mA | 68% | 70% | ± 22 $\mu$ F  |
| FDD03 - 05D3(U) | 36~72 VDC | 70 mA  | 100 mA | 2.5 WATTS | ± 5 VDC  | ± 250 mA | 73% | 75% | ± 100 $\mu$ F |
| FDD03 - 12D3(U) | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | ± 12 VDC | ± 125 mA | 75% | 77% | ± 47 $\mu$ F  |
| FDD03 - 15D3(U) | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | ± 15 VDC | ± 100 mA | 75% | 77% | ± 22 $\mu$ F  |
| FDD03 - 05D4(U) | 9~36 VDC  | 155 mA | 440 mA | 2.5 WATTS | ± 5 VDC  | ± 250 mA | 66% | 68% | ± 100 $\mu$ F |
| FDD03 - 12D4(U) | 9~36 VDC  | 180 mA | 510 mA | 3 WATTS   | ± 12 VDC | ± 125 mA | 68% | 70% | ± 47 $\mu$ F  |
| FDD03 - 15D4(U) | 9~36 VDC  | 180 mA | 510 mA | 3 WATTS   | ± 15 VDC | ± 100 mA | 68% | 70% | ± 22 $\mu$ F  |
| FDD03 - 05D5(U) | 18~72 VDC | 70 mA  | 200 mA | 2.5 WATTS | ± 5 VDC  | ± 250 mA | 73% | 75% | ± 100 $\mu$ F |
| FDD03 - 12D5(U) | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | ± 12 VDC | ± 125 mA | 75% | 77% | ± 47 $\mu$ F  |
| FDD03 - 15D5(U) | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | ± 15 VDC | ± 100 mA | 75% | 77% | ± 22 $\mu$ F  |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### GENERAL

| Characteristics         | Conditions                  | min.                  | typ.      | max.   | unit       |
|-------------------------|-----------------------------|-----------------------|-----------|--------|------------|
| Switching frequency     | Vi nom, Io nom              | 50                    |           |        | KHz        |
| Isolation voltage       | Input - Output              | 1,500                 |           |        | VDC        |
| Isolation resistance    | Input - Output, @ 500VDC    | 100                   |           |        | M $\Omega$ |
| Ambient temperature     | Operating at Vi nom, Io nom | -40                   |           | + 71   | °C         |
| Case temperature        | Operating at Vi nom, Io nom |                       |           | + 90   | °C         |
| Derating                | Vi nom                      | See derating curve    |           |        |            |
| Storage temperature     | Non operational             | -40                   |           | + 100  | °C         |
| Relative humidity       | Vi nom, Io nom              | 20                    |           | 95     | % RH       |
| Temperature coefficient | Vi nom, Io min              |                       |           | ± 0.02 | % / °C     |
| Dimension               |                             | L31.8 x W20.3 x H12.7 |           |        | mm         |
| MTBF                    | Bellcore issue 6@40°C, GB   |                       | 1,640,000 |        | Hours      |
| Cooling                 | Free air convection         |                       |           |        |            |

### INPUT SPECIFICATIONS

| Characteristics          | Conditions                   | min.  | typ. | max. | unit |     |
|--------------------------|------------------------------|-------|------|------|------|-----|
| Input voltage range      | Ta min ... Ta max,<br>Io nom | 2 : 1 | 9    | 12   | 18   | VDC |
|                          |                              |       | 18   | 24   | 36   | VDC |
|                          |                              |       | 36   | 48   | 72   | VDC |
|                          |                              | 3 : 1 | 20   | 48   | 60   | VDC |
|                          |                              | 4 : 1 | 9    | 24   | 36   | VDC |
|                          |                              |       | 18   | 48   | 72   | VDC |
| No load input current    | Vi nom, Io = 0               | 12V   |      | 18   | mA   |     |
|                          |                              | 24V   |      | 15   | mA   |     |
|                          |                              | 48V   |      | 8    | mA   |     |
| Input voltage w/o damage | Io nom                       | 12V   |      | 20   | VDC  |     |
|                          |                              | 24V   |      | 40   | VDC  |     |
|                          |                              | 48V   |      | 75   | VDC  |     |
| Startup voltage          | Io nom                       | 12V   | 7.2  |      | VDC  |     |
|                          |                              | 24V   | 7.2  |      | VDC  |     |
|                          |                              | 48V   | 16.1 |      | VDC  |     |

### OUTPUT SPECIFICATIONS

| Characteristics         | Conditions                       | min. | typ. | max. | unit |
|-------------------------|----------------------------------|------|------|------|------|
| Output voltage accuracy | Vi nom, Io nom                   |      |      | ± 2  | %    |
| Minimum load            | Vi nom                           |      |      |      |      |
|                         | single output models             | 0    |      |      | %    |
|                         | dual output models (each output) | 20   |      |      | %    |

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### OUTPUT SPECIFICATIONS

| Characteristics               | Conditions                                   | min.   | typ. | max. | unit |
|-------------------------------|--|--|------|------|------|
| Line regulation               | Io nom, Vi min ...Vi max                     |  |      | ± 1  | %    |
| Load regulation               | Vi nom, Io 0 ...Io nom, single output models |  |      | ± 2  | %    |
|                               | Vi nom, Io min ...Io nom, dual output models |  |      | ± 5  | %    |
| Cross regulation (Dual model) | Aymmetrical load 20% - 100% FL               |  |      | ± 10 | %    |
| Startup time                  | Vi nom, Io nom                               |  |      | 30   | ms   |
| Transient recovery time       | Vi nom, I ~0.5 Io nom                        |  |      | 3    | ms   |
| Ripple & noise                | Vi nom, Io nom, BW = 20MHz                   |  |      | 300  | mV   |
| Efficiency                    | Vi nom, Io nom, Po / Pi                      | Up to 79%, See model list and efficiency curve |      |      |      |

#### CONTROL AND PROTECTION

|                      |  |
|----------------------|--|
| Input reversed       | External shunt diode, external fuse recommended ( 12Vin : 0.75A, 24Vin : 0.75A, 48Vin : 0.5A ) |
| Output short circuit | Current limited (Auto-recovery)  |

#### APPROVALS AND STANDARD

|           |   |
|-----------|---|
| cTUVus    | UL 60950-1 Recognized   |
| TUV       | EN 60950-1  |
| CE I)     | EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8 |
| Vibration | meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)               |


NOTE 1 : Pls refer to recommended circuit .

#### PHYSICAL CHARACTERISTICS

|                  |   |
|------------------|---|
| Case size        | 31.8 x 20.3 x 12.7 mm (1.25 x 0.8 x 0.5 inches) |
| Case material    | Plastic   |
| Weight           | 15 g  |
| Potting material | Epoxy   |

#### MECHANISM & PIN CONFIGURATION

mm [inch]

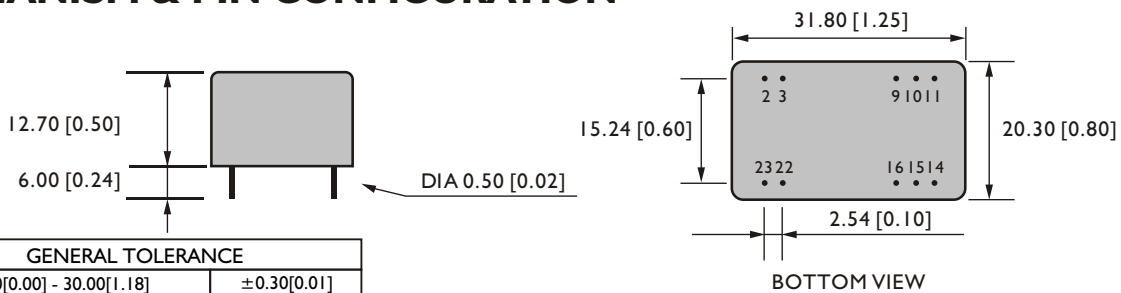

| GENERAL TOLERANCE          |             |
|----------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]   | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72] | ±0.50[0.02] |


#### PIN ASSIGNMENT

##### GENERAL


| PIN NO. | 2&3  | 9     | 10&15 | 11    | 14   | 16   | 22&23 |
|---------|------|-------|-------|-------|------|------|-------|
| SINGLE  | Vi - | N. C. | N. C. | N. C. | Vo + | Vo - | Vi +  |
| DUAL    | Vi - | com   | N. C. | Vo -  | Vo + | com  | Vi +  |

#### APPLICATION CIRCUIT

a. SINGLE OUTPUT MODELS :

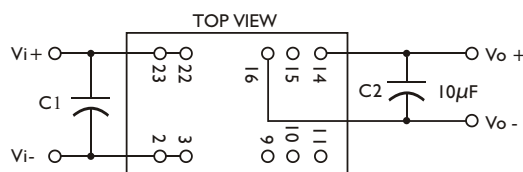

b. DUAL OUTPUT MODELS :

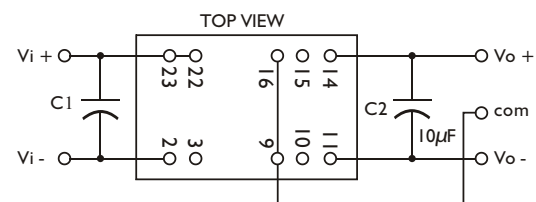

##### NOTE:

a. C1 = 4.7μF / 100V, C2 = 10μF


b. C1 MUST BE ADDED WHEN APPLICATION .

c. C2 OPTIONAL TO MINIMIZE THE R & N < 100mV .


d. MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS .

### CIRCUIT SCHEMATIC

- Block diagram for FDD03(U) series with single output

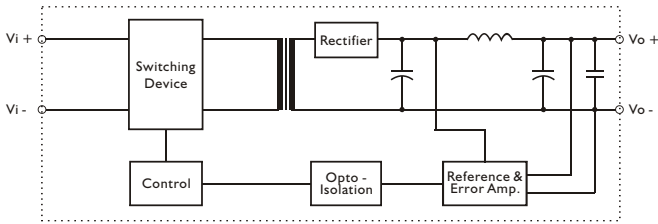


- Block diagram for FDD03(U) series with dual output

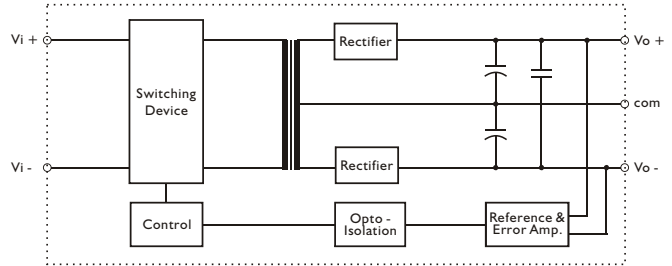


### RECOMMENDED CIRCUIT

- Recommended filter for EN55022 Class B compliance

SINGLE OUTPUT MODELS

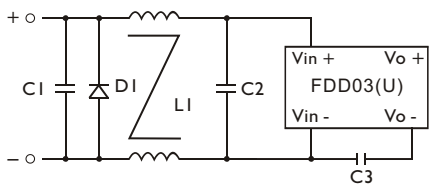

DUAL OUTPUT MODELS

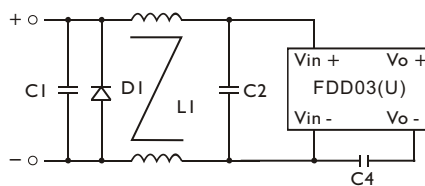


Note: D1 - Reverse Diode (1A/100V)

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.


|                   | C1                         | C2                         | C3              | C4              | L1                     |
|-------------------|----------------------------|----------------------------|-----------------|-----------------|------------------------|
| FDD03-<br>XXSX(U) | 6.8 $\mu$ F / 100V<br>MLCC | 4.7 $\mu$ F / 100V<br>MLCC | InF/2KV<br>MLCC |                 | 3mH<br>Common<br>Choke |
| FDD03-<br>XXDX(U) | 6.8 $\mu$ F / 100V<br>MLCC | 4.7 $\mu$ F / 100V<br>MLCC |                 | InF/2KV<br>MLCC | 3mH<br>Common<br>Choke |

- Recommended EN 55022 Class B filter circuit layout.

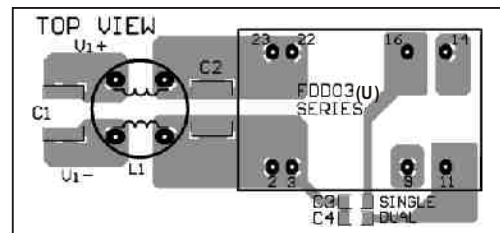


### DERATING AND EFFICIENCY CURVE


Temperature derating curve

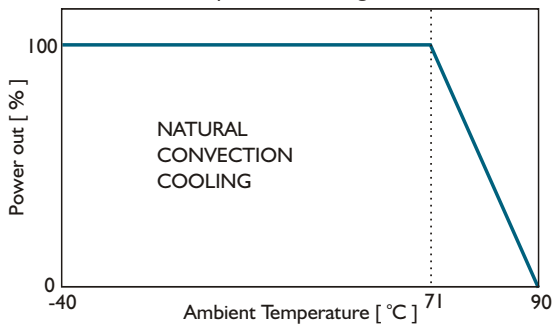

Efficiency Vs Input Voltage  
FDD03-05S4(U)

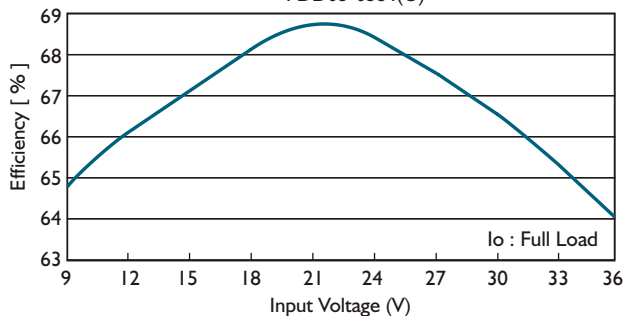

Efficiency Vs Output Load  
FDD03-05S4(U)

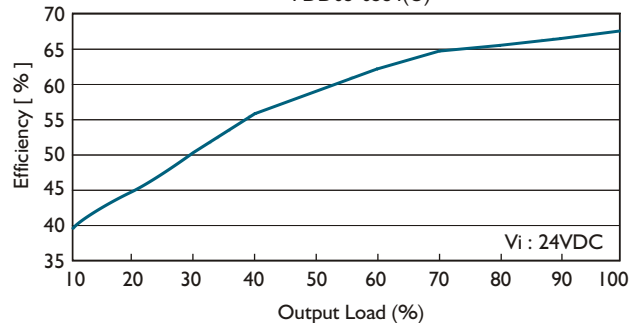

# FDD03A(U) SERIES

DC - DC CONVERTER

2.5 ~ 3W SINGLE & DUAL OUTPUT



## FDD03 - 05S4A x

BLANK : w/o SAFETY APPROVALS  
U : SAFETY APPROVALS

### FEATURES

- 4:1 WIDE INPUT RANGE
- DIP24 PACKAGE
- I/O, O/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 3 YEARS WARRANTY



EN 60950-1

### MODEL LIST

| MODEL NO.                   | INPUT VOLTAGE | INPUT CURRENT (typ.)   (max.) |        | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|-----------------------------|---------------|-------------------------------|--------|----------------|----------------|----------------|-------------|-------------|-----------------------|
| <b>Single Output Models</b> |               |                               |        |                |                |                |             |             |                       |
| FDD03 - 05S4A(U)            | 9~36 VDC      | 160 mA                        | 440 mA | 2.5 WATTS      | + 5 VDC        | 500 mA         | 65%         | 67%         | 1000 $\mu$ F          |
| FDD03 - 12S4A(U)            | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | + 12 VDC       | 250 mA         | 68%         | 70%         | 470 $\mu$ F           |
| FDD03 - 15S4A(U)            | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | + 15 VDC       | 200 mA         | 68%         | 70%         | 330 $\mu$ F           |
| FDD03 - 05S5A(U)            | 18~72 VDC     | 75 mA                         | 205 mA | 2.5 WATTS      | + 5 VDC        | 500 mA         | 70%         | 72%         | 1000 $\mu$ F          |
| FDD03 - 12S5A(U)            | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | + 12 VDC       | 250 mA         | 75%         | 77%         | 470 $\mu$ F           |
| FDD03 - 15S5A(U)            | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | + 15 VDC       | 200 mA         | 75%         | 77%         | 330 $\mu$ F           |
| <b>Dual Output Models</b>   |               |                               |        |                |                |                |             |             |                       |
| FDD03 - 05D4A(U)            | 9~36 VDC      | 155 mA                        | 440 mA | 2.5 WATTS      | $\pm$ 5 VDC    | $\pm$ 250 mA   | 66%         | 68%         | $\pm$ 100 $\mu$ F     |
| FDD03 - 12D4A(U)            | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | $\pm$ 12 VDC   | $\pm$ 125 mA   | 68%         | 70%         | $\pm$ 47 $\mu$ F      |
| FDD03 - 15D4A(U)            | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | $\pm$ 15 VDC   | $\pm$ 100 mA   | 68%         | 70%         | $\pm$ 22 $\mu$ F      |
| FDD03 - 05D5A(U)            | 18~72 VDC     | 70 mA                         | 205 mA | 2.5 WATTS      | $\pm$ 5 VDC    | $\pm$ 250 mA   | 72%         | 74%         | $\pm$ 100 $\mu$ F     |
| FDD03 - 12D5A(U)            | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | $\pm$ 12 VDC   | $\pm$ 125 mA   | 75%         | 77%         | $\pm$ 47 $\mu$ F      |
| FDD03 - 15D5A(U)            | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | $\pm$ 15 VDC   | $\pm$ 100 mA   | 75%         | 77%         | $\pm$ 22 $\mu$ F      |
| <b>Double Output Models</b> |               |                               |        |                |                |                |             |             |                       |
| FDD03 - 0505D4A(U)          | 9~36 VDC      | 160 mA                        | 440 mA | 2.5 WATTS      | 5 / 5 VDC      | 250 / 250 mA   | 66%         | 68%         | 100 $\mu$ F           |
| FDD03 - 1212D4A(U)          | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | 12 / 12 VDC    | 125 / 125 mA   | 68%         | 70%         | 47 $\mu$ F            |
| FDD03 - 1515D4A(U)          | 9~36 VDC      | 180 mA                        | 530 mA | 3 WATTS        | 15 / 15 VDC    | 100 / 100 mA   | 68%         | 70%         | 22 $\mu$ F            |
| FDD03 - 0505D5A(U)          | 18~72 VDC     | 70 mA                         | 205 mA | 2.5 WATTS      | 5 / 5 VDC      | 250 / 250 mA   | 72%         | 74%         | 100 $\mu$ F           |
| FDD03 - 1212D5A(U)          | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | 12 / 12 VDC    | 125 / 125 mA   | 75%         | 77%         | 47 $\mu$ F            |
| FDD03 - 1515D5A(U)          | 18~72 VDC     | 80 mA                         | 235 mA | 3 WATTS        | 15 / 15 VDC    | 100 / 100 mA   | 75%         | 77%         | 22 $\mu$ F            |

**NOTE :**

MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS.



# FDD03A(U) SERIES

SINGLE & DUAL OUTPUT

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### GENERAL

| Characteristics         | Conditions                  | min.                  | typ.      | max.   | unit   |
|-------------------------|-----------------------------|-----------------------|-----------|--------|--------|
| Switching frequency     | Vi nom, Io nom              | 50                    |           |        | KHz    |
| Isolation voltage       | Input - Output              | 1,500                 |           |        | VDC    |
| Isolation resistance    | Input - Output, @ 500VDC    | 100                   |           |        | MΩ     |
| Ambient temperature     | Operating at Vi nom, Io nom | -40                   |           | + 71   | °C     |
| Case temperature        | Operating at Vi nom, Io nom |                       |           | +90    | °C     |
| Derating                | Vi nom                      | See derating curve    |           |        |        |
| Storage temperature     | Non operational             | -40                   |           | + 100  | °C     |
| Relative humidity       | Vi nom, Io nom              | 20                    |           | 95     | % RH   |
| Temperature coefficient | Vi nom, Io min              |                       |           | ± 0.02 | % / °C |
| Dimension               |                             | L31.8 x W20.3 x H12.7 |           |        | mm     |
| MTBF                    | Bellcore issue 6@40°C, GB   |                       | 1,640,000 |        | Hours  |
| Cooling                 | Free air convection         |                       |           |        |        |

### INPUT SPECIFICATIONS

| Characteristics          | Conditions                | min. | typ. | max. | unit |
|--------------------------|---------------------------|------|------|------|------|
| Input voltage range      | Ta min ... Ta max, Io nom | 9    | 24   | 36   | VDC  |
|                          |                           | 18   | 48   | 72   | VDC  |
| No load input current    | Vi nom, Io = 0            | 24V  |      | 15   | mA   |
|                          |                           | 48V  |      | 8    | mA   |
| Input voltage w/o damage | Io nom                    | 24V  |      | 40   | VDC  |
|                          |                           | 48V  |      | 75   | VDC  |
| Startup voltage          | Io nom                    | 24V  | 7.2  |      | VDC  |
|                          |                           | 48V  | 16.1 |      | VDC  |

### OUTPUT SPECIFICATIONS

| Characteristics               | Conditions                                    | min.   | typ. | max. | unit |
|-------------------------------|---|--|------|------|------|
| Output voltage accuracy       | Vi nom, Io nom                                |  |      | ± 2  | %    |
| Minimum load                  | Vi nom single output models                   | 0  |      |      | %    |
|                               | Vi nom dual output models (each output)       | 20   |      |      | %    |
| Line regulation               | Io nom, Vi min ... Vi max                     |  |      | ± 1  | %    |
| Load regulation               | Vi nom, Io 0 ... Io nom, single output models |  |      | ± 2  | %    |
|                               | Vi nom, Io min ... Io nom, dual output models |  |      | ± 5  | %    |
| Cross regulation (Dual model) | Aymmetrical load 20% - 100% FL                |  |      | ± 10 | %    |
| Startup time                  | Vi nom, Io nom                                |  |      | 30   | ms   |
| Transient recovery time       | Vi nom, I ~ 0.5 Io nom                        |  |      | 3    | ms   |
| Ripple & noise                | Vi nom, Io nom, BW = 20MHz                    |  |      | 150  | mV   |
| Efficiency                    | Vi nom, Io nom, Po / Pi                       | Up to 77%, See model list and efficiency curve |      |      |      |

### CONTROL AND PROTECTION

|                      |   |
|----------------------|---|
| Remote ON / OFF      | ON: opened or 5~10 VDC applied, reference to input GND<br>OFF: -0.3~2 VDC applied, reference to input GND |
| Input reversed       | External shunt diode, external fuse recommended ( 24Vin : 0.75A, 48Vin : 0.5A )                           |
| Output short circuit | Current limited (Auto-recovery)   |

### APPROVALS AND STANDARD

|           |   |
|-----------|---|
| cTUVus    | UL 60950-1 Recognized   |
| TUV       | EN 60950-1  |
| CE I)     | EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8 |
| Vibration | meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)               |

NOTE 1 : Pls refer to recommended circuit .

# FDD03A(U) SERIES



SINGLE & DUAL OUTPUT

## PHYSICAL CHARACTERISTICS

|                  |   |
|------------------|---|
| Case size        | 31.8 × 20.3 × 12.7 mm (1.25 × 0.8 × 0.5 inches) |
| Case material    | Plastic   |
| Weight           | 15 g  |
| Potting material | Epoxy   |

## MECHANISM & PIN CONFIGURATION

mm [inch]

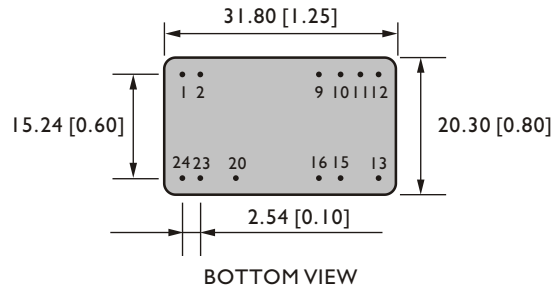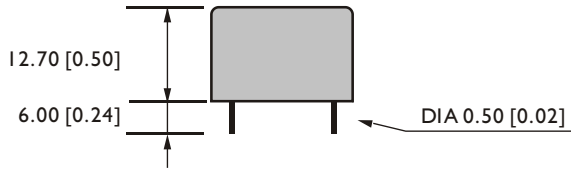

| GENERAL TOLERANCE          |             |
|----------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]   | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72] | ±0.50[0.02] |


## PIN ASSIGNMENT

### GENERAL


| PIN NO. | 1&2 | 9      | 10&11  | 12     | 13   | 15     | 16     | 20            | 23&24 |
|---------|-----|--------|--------|--------|------|--------|--------|---------------|-------|
| SINGLE  | Vi+ | NO PIN | NO PIN | Vo-    | Vo+  | NO PIN | NO PIN | Remote ON/OFF | Vi-   |
| DUAL    | Vi+ | NO PIN | com    | NO PIN | Vo-  | Vo+    | NO PIN | Remote ON/OFF | Vi-   |
| DOUBLE  | Vi+ | Vo1-   | NO PIN | Vo1+   | Vo2+ | NO PIN | Vo2-   | Remote ON/OFF | Vi-   |

## CIRCUIT SCHEMATIC


• Block diagram for FDD03A(U) series with single output

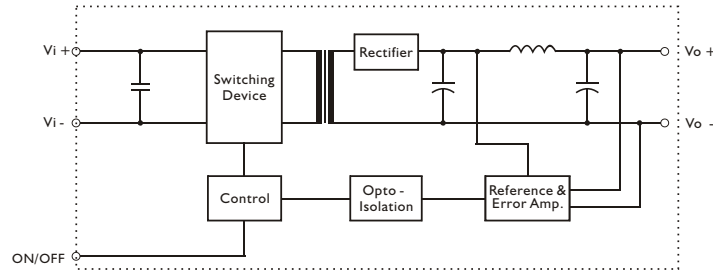

• Block diagram for FDD03A(U) series with dual output

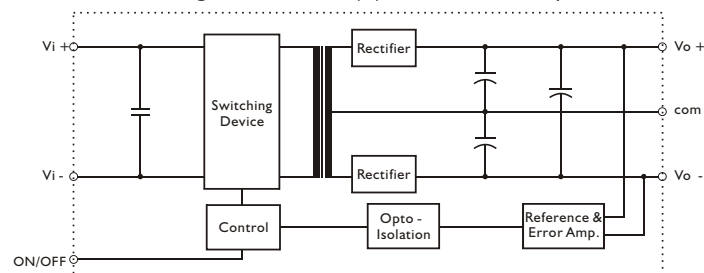


• Block diagram for FDD03A(U) series with double output

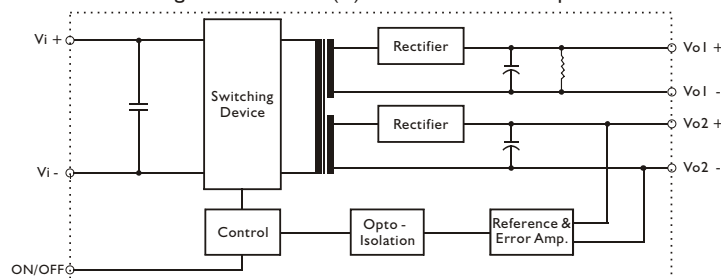

### RECOMMENDED CIRCUIT

- Recommended filter for EN55022 Class B compliance

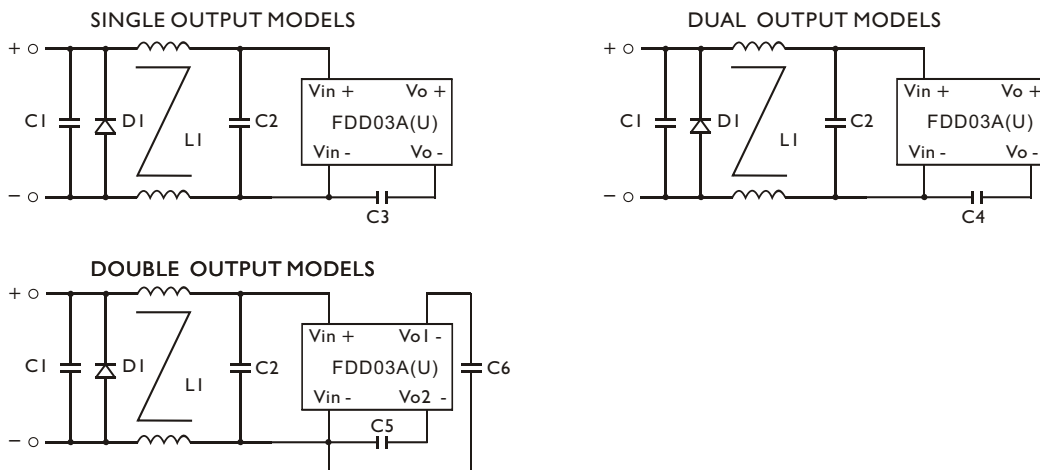


Note: D1 - Reverse Diode (1A / 100V)

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

|                 | C1                      | C2                      | C3           | C4           | C5           | C6           | L1               |
|-----------------|-------------------------|-------------------------|--------------|--------------|--------------|--------------|------------------|
| FDD03-XXSXA(U)  | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC | InF/2KV MLCC | /            | /            | /            | 3mH Common Choke |
| FDD03-XXDXA(U)  | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC | /            | InF/2KV MLCC | /            | /            | 3mH Common Choke |
| FDD03-XXXXXA(U) | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC | /            | /            | InF/2KV MLCC | InF/2KV MLCC | 3mH Common Choke |

- Recommended EN 55022 Class B filter circuit layout.

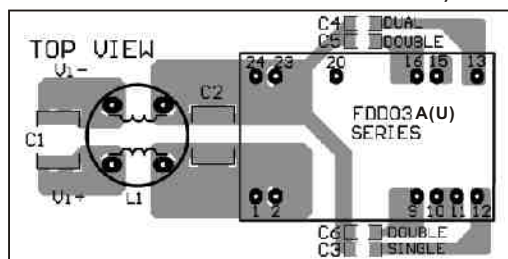

### DERATING AND EFFICIENCY CURVE

