

**P6LG-XXXXE 3KV ISOLATED 1 W REGULATED SINGLE OUTPUT SIP7**

**Available Inputs: 5, 12 and 24 VDC**

**Available Outputs: 3.0, 3.3, 5, 9, and 12 VDC**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range +/- 10 %  
 Filter Capacitors

**Isolation Specifications**

Rated voltage 3000 VDC  
 Resistance 10<sup>9</sup> Ohm  
 Capacitance 60 pF typ.

**Output Specifications**

Voltage accuracy +/- 2 %  
 Ripple and noise (at 20 MHz BW) 50 mV p-p, max.  
 Short circuit protection Short term  
 Line voltage regulation +/- 0,5 % max., (3.3 VDC output +/- 1 % max )  
 Load voltage regulation +/- 0,5 % typ., +/- 1 % max. (No load to full load)  
 Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 58 % to 66 %  
 Switching frequency 70 KHz, typ.

**Environmental Specifications**

Operating temperature (ambient) - 40° C to + 85° C  
 Storage temperature - 55 °C to + 125 °C  
 Derating See graph  
 Humidity Up to 90 %, non condensing  
 Cooling Free air convection


**Physical Characteristics**

Dimensions SIP 19,50 x 7,20 x 9,50 mm  
 0,76 x 0,28 x 0,37 inches  
 Weight 2,7 g  
 Case material Non conductive black plastic


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6LG-0503E	5	20	200	3	200	60
P6LG-053R3E	5	22	220	3,3	200	60
P6LG-054R8E	5	25	318	4,85	200	61
P6LG-0505E	5	28	312	5	200	63
P6LG-0509E	5	32	312	9	111	64
P6LG-0512E	5	45	312	12	84	64
P6LG-1203E	12	15	83	3	200	60
P6LG-123R3E	12	15	92	3,3	200	60
P6LG-124R8E	12	15	133	4,85	200	61
P6LG-1205E	12	16	130	5	200	64
P6LG-1209E	12	16	123	9	111	68
P6LG-1212E	12	22	123	12	84	68
P6LG-2403E	24	8	43	3	200	58
P6LG-243R3E	24	8	47	3,3	200	58
P6LG-244R8E	24	7	64	4,85	200	63
P6LG-2405E	24	7	64	5	200	65
P6LG-2409E	24	10	63	9	111	66
P6LG-2412E	24	10	63	12	84	66

**Dimensions**

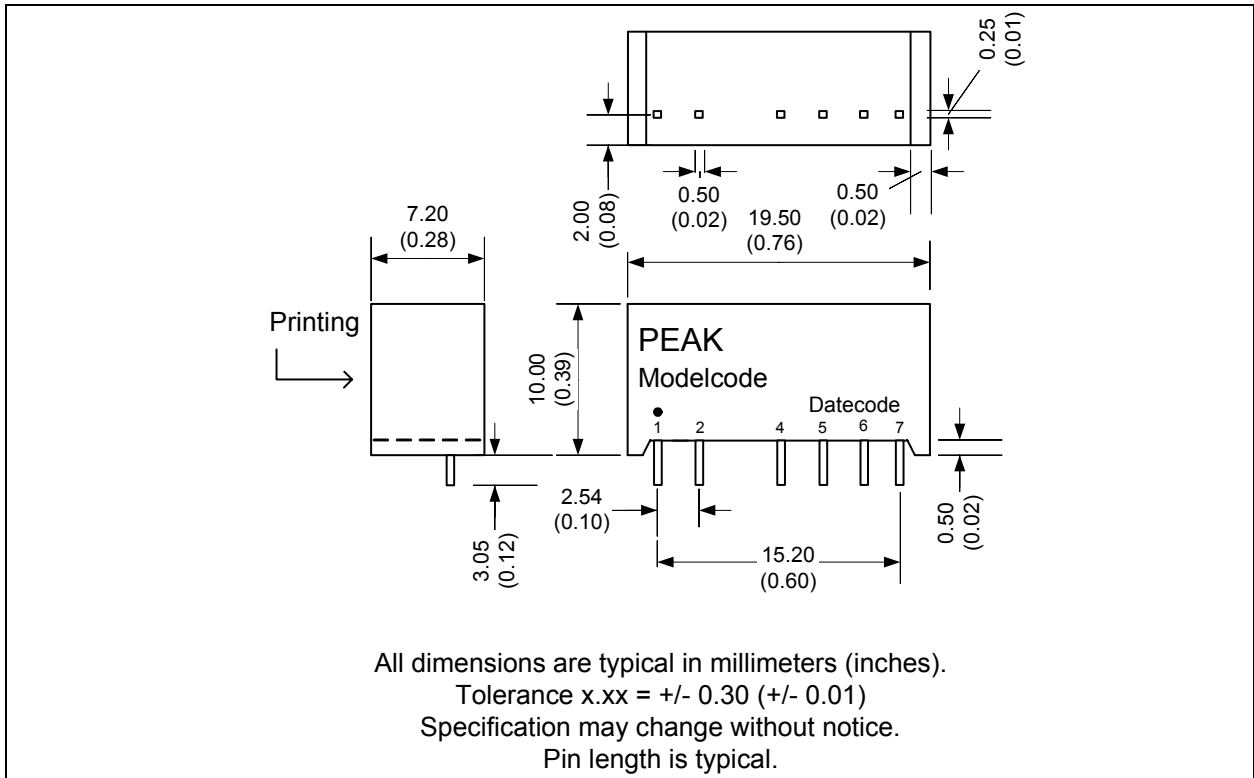

**Derating Graph and Pinning**

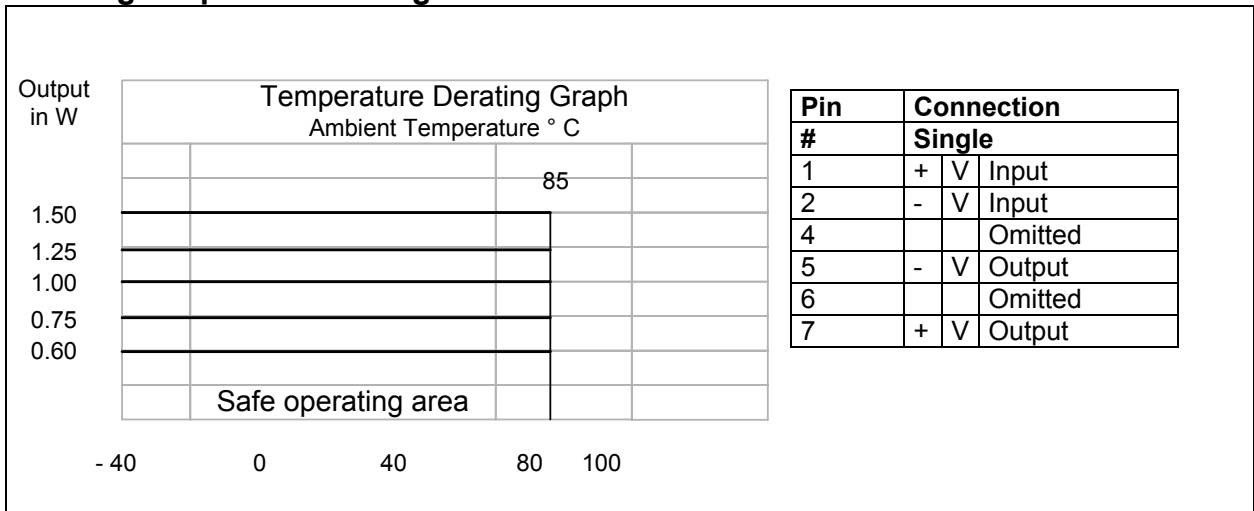

If specification prior to this data sheet is needed, please enquire.

Specification can be changed without notice.  
 REV:A / 06.2003

Copyright PEAK electronics GmbH