


PWM CONTROLLER

The KA7552/3 are switching power control IC for wide operating frequency range. The internal circuits include pulse by pulse current limiting, protection, on/off control by external trigger, low standby current, soft start, and high current totempole output for driving a POWER MOS-FET.
Maximum duty of the KA7552 is 70% and the KA7553 is 46%.
When duty is maximum, the input threshold voltage of pin2 & pin8 are not same in KA7552 and KA7553.

FEATURES


- Built-in Drive Circuits for Direct Connection POWER MOSFET ($I_C = 1.5A$)
- Wide Operating Frequency Range (5KHz ~ 600KHz)
- Pulse By Pulse Over Current Limiting
- Over Load Protection
- On/Off Control By External Trigger
- Internal UVLO
- Low Standby Current (Typ. 90uA)
- Soft Start Circuit



ORDERING INFORMATION

| Device | Package | Operating Temperature |
|----------|---------|-----------------------|
| KA7552/3 | 8 DIP | -25 ~ +85°C |

BLOCK DIAGRAM

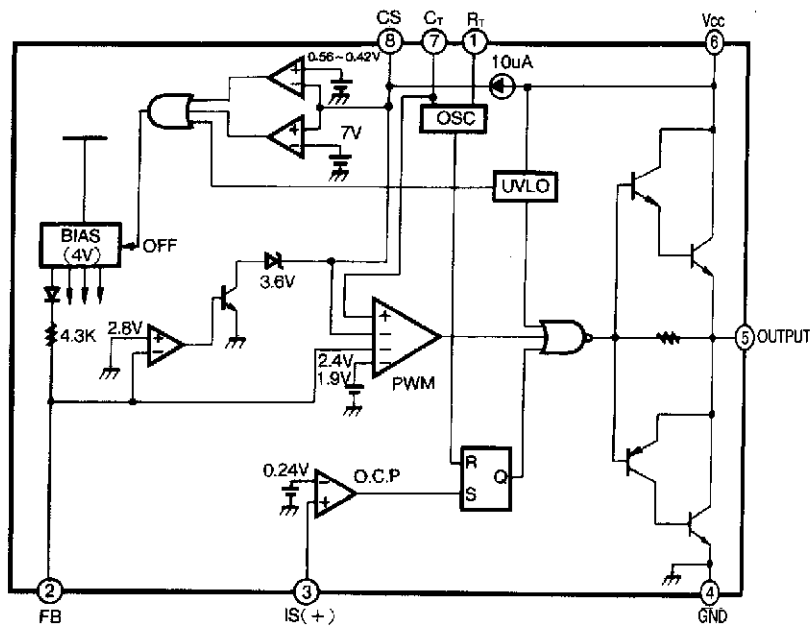

ABSOLUTE MAXIMUM RATINGS

| Characteristic | Symbol | Value | Unit |
|---|--------------|------------|------------------|
| Supply Voltage | V_{CC} | 30 | V |
| Output Current | I_O | - 1.5 | A |
| Input Voltage at Overcurrent Detection Pin | $V_{IN(OS)}$ | - 0.3 to 4 | V |
| Input Voltage at FB Pin | $V_{IN(FB)}$ | 4 | V |
| Input Current at CS Pin | $I_{IN(CS)}$ | 2 | mA |
| Total Power Dissipation($T_A = 25^\circ\text{C}$) | P_D | 800 | mW |
| Operating Temperature | T_{OPR} | - 25 to 85 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS

($V_{CC} = 18\text{V}$, $F_{OSC} = 135\text{KHz}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---------------------------------------|-----------------------|---|-------|-----------|---------|---------------|
| OSCILLATOR SECTION | | | | | | |
| Initial Accuracy | F_{OSC} | $C_T = 360\text{pF}$, $T_J = 25^\circ\text{C}$ | 125 | 135 | 145 | KHz |
| Frequency Variation 1 | $\Delta F/\Delta V$ | $V_{CC} = 10\text{V to } 30\text{V}$ | — | ± 1 | ± 3 | % |
| Frequency Variation 2 | $\Delta F/\Delta V$ | $T_A = 25^\circ\text{C to } 85^\circ\text{C}$ | | ± 1.5 | | % |
| Ramp High Voltage | V_{RH} | $C_T = 360\text{pF}$, $T_J = 25^\circ\text{C}$ | 2.80 | 3.08 | 3.30 | V |
| Ramp Low Voltage | V_{RL} | $C_T = 360\text{pF}$, $T_J = 25^\circ\text{C}$ | 0.6 | 0.9 | 1.2 | V |
| Amplitude | V_{OSC} | V_{PIN7} , Peak to Peak | 1.80 | 2.18 | 2.50 | V |
| PULSE WIDTH MODULATION SECTION | | | | | | |
| Input Threshold Voltage(Pin2) | $V_{TH(FBD)}$ | Duty Cycle = 0% | 0.6 | 0.75 | 0.95 | V |
| Input Threshold Voltage(Pin2) | $V_{TH(FB1)}(KA7552)$ | Duty Cycle = Dmax 1 | 2.1 | 2.3 | 2.6 | V |
| | $V_{TH(FB2)}(KA7553)$ | Duty Cycle = Dmax 2 | 1.6 | 1.8 | 2.1 | V |
| Max. Duty Cycle | $D_{(Max 1)}(KA7552)$ | — | 66 | 70 | 74 | % |
| | $D_{(Max 2)}(KA7553)$ | — | 43 | 46 | 49 | % |
| Source Current(Pin2) | $I_{SOURCE(FB)}$ | $V_{PIN2} = 0\text{V}$ | - 660 | - 800 | - 960 | μA |

ELECTRICAL CHARACTERISTICS(Continued)

($V_{CC} = 18V$, $F_{OSC} = 135KHz$, $T_A = 25^{\circ}C$, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--|-----------------------|-----------------------------------|------|------|------|---------|
| OVERCURRENT LIMIT SECTION | | | | | | |
| Input Threshold Voltage | $V_{TH(I)}$ | — | 0.21 | 0.24 | 0.27 | V |
| Source Current(Pin3) | $I_{SOURCE(I)}$ | $V_{PIN3} = 0V$ | -300 | -200 | -100 | μA |
| Deley Time | T_D | | | 150 | | ns |
| SOFT START SECTION | | | | | | |
| Charging Current | I_{CHG} | $V_{PIN8} = 0V$ | -15 | -10 | -5 | μA |
| Input Threshold Voltage(Pin8) | $V_{TH(CSO)}$ | Duty Cycle = Dmax 1 | 0.7 | 0.9 | 1.1 | V |
| Input Threshold Voltage(Pin8) | $V_{TH(CS1)}(KA7552)$ | Duty Cycle = Dmax 2 | 2.2 | 2.4 | 2.6 | V |
| | $V_{TH(CS2)}(KA7553)$ | | 1.7 | 1.9 | 2.1 | V |
| LATCH MODE SHUTDOWN CIRCUIT SECTION | | | | | | |
| Sink Current(Pin8) | $I_{SINK(CS)}$ | $V_{PIN8} = 6V$, $V_{PIN2} = 1V$ | 25 | 45 | 65 | μA |
| Shutdown Threshold Voltage | $V_{TH(SD,CS)}$ | — | 6.7 | 7.2 | 7.7 | V |
| OVERLOAD SHUTDOWN SECTION | | | | | | |
| Shutdown Threshold Voltage | $V_{TH(SD,FB)}$ | — | 2.6 | 2.8 | 3.1 | V |
| UNDER VOLTAGE LOCKOUT SECTION | | | | | | |
| Start-Up Threshold Voltage | $V_{TH(ST)}$ | — | 15.5 | 16.0 | 16.5 | V |
| Minimum Operating Voltage | $V_{OPR(MIN)}$ | — | 8.20 | 8.70 | 9.20 | V |
| Hysteresis | V_{HYS} | | 6.40 | 7.30 | 8.20 | V |
| ON/OFF CONTROL SECTION | | | | | | |
| Source Current(Pin8) | $I_{SOURCE(CS)}$ | $V_{PIN8} = 0V$ | - 15 | - 10 | - 5 | μA |
| On Threshold Voltage | $V_{TH(ON)}$ | $V_{PIN8} : OFF \rightarrow ON$ | 0.45 | 0.56 | 0.70 | V |
| Off Threshold Voltage | $V_{TH(OFF)}$ | $V_{PIN8} : ON \rightarrow OFF$ | 0.30 | 0.42 | 0.55 | V |

ELECTRICAL CHARACTERISTICS(Continued)

($V_{CC} = 18V$, $F_{OSC} = 135KHz$, $T_A = 25^{\circ}C$, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|-------------------------------|---------------|---------------------------------|------|------|------|---------|
| OUTPUT SECTION | | | | | | |
| Low Output Voltage | V_{OL} | $I_O = 100mA$, $V_{CC} = 18V$ | — | 1.3 | 1.8 | V |
| High Output Voltage | V_{OH} | $I_O = -100mA$, $V_{CC} = 18V$ | 16.0 | 16.5 | 18.0 | V |
| Rise Time * | T_R | NO LOAD | | 50 | | ns |
| Fall Time * | T_F | NO LOAD | | 50 | | ns |
| OVERALL | | | | | | |
| Stand-by Current | I_{SB} | $V_{CC} = 14V$ | — | 90 | 150 | μA |
| Operating Current | $I_{CC(OPR)}$ | $V_{PIN2} = 0V$ | | 9 | 15 | mA |
| Power Supply Current off | $I_{CC(OFF)}$ | $V_{PINB} = 0V$ | — | 1.1 | 1.8 | mA |
| Power Supply Current Shutdown | $I_{CC(SD)}$ | $V_{PINB} = 7.6V$ | — | 1.1 | 1.8 | mA |

* These parameters, although guaranteed, are not 100% tested in production.

NOTE : Recommend Operating Condition

$R_T = 3.3K\Omega \sim 10K\Omega$, Oscillation Frequency = 5KHz ~ 600KHz

Soft Start Condensor(CS) = 0.1 μF ~ 1 μF

Dimensions in Millimeters

