

LED MOUNTS/SPACERS

Molded Self-Retaining LED Mounts

- One Universal Style for Both T-1 (3mm) and T-1³/₄ (5mm) LEDs
- Internal Tapered Divider Prevents Leads from Shorting
- 54 Standard Stock Lengths from .120" - .900" (3.1 - 22.9)

Bivar's molded NTM LED mounts are a cost effective alternative to the industry standard. Available in a wide range of colors they may be dyed for a small additional charge.

Material Specifications:

UL Rated 94V-2 Natural 6/6 Nylon per ASTM D4066 PA111


Oxygen Index: +28%

UL File #E135532



NTM Series	6/6 Nylon STM D4066 Color: Natural	
------------	---------------------------------------	--

Part No.	H	Price Code	Part No.	H	Price Code
NTM-120	.120 (3.1)	A	NTM-390	.390 (9.9)	B
NTM-130	.130 (3.3)	A	NTM-400	.400 (10.2)	B
NTM-140	.140 (3.6)	A	NTM-410	.410 (10.4)	B
NTM-150	.150 (3.8)	A	NTM-420	.420 (10.7)	B
NTM-160	.160 (4.1)	A	NTM-430	.430 (10.9)	B
NTM-170	.170 (4.3)	A	NTM-440	.440 (11.2)	B
NTM-180	.180 (4.6)	A	NTM-450	.450 (11.4)	B
NTM-190	.190 (4.8)	A	NTM-460	.460 (11.7)	B
NTM-200	.200 (5.1)	A	NTM-480	.480 (12.2)	B
NTM-210	.210 (5.3)	A	NTM-490	.490 (12.5)	B
NTM-220	.220 (5.6)	A	NTM-500	.500 (12.7)	F
NTM-230	.230 (5.8)	A	NTM-520	.520 (13.2)	F
NTM-240	.240 (6.1)	A	NTM-550	.550 (14.0)	F
NTM-250	.250 (6.4)	A	NTM-570	.570 (14.5)	F
NTM-260	.260 (6.6)	A	NTM-600	.600 (15.2)	F
NTM-270	.270 (6.9)	A	NTM-620	.620 (15.8)	F
NTM-280	.280 (7.1)	A	NTM-650	.650 (16.5)	G
NTM-290	.290 (7.4)	A	NTM-670	.670 (17.0)	G
NTM-300	.300 (7.6)	A	NTM-700	.700 (17.8)	G
NTM-310	.310 (7.9)	A	NTM-720	.720 (18.3)	G
NTM-320	.320 (8.1)	A	NTM-750	.750 (19.1)	H
NTM-330	.330 (8.4)	A	NTM-770	.770 (19.6)	H
NTM-340	.340 (8.6)	A	NTM-800	.800 (20.3)	H
NTM-350	.350 (8.9)	A	NTM-820	.820 (20.8)	H
NTM-360	.360 (9.1)	A	NTM-850	.850 (21.6)	H
NTM-370	.370 (9.4)	A	NTM-870	.870 (22.1)	H
NTM-380	.380 (9.7)	B	NTM-900	.900 (22.9)	H

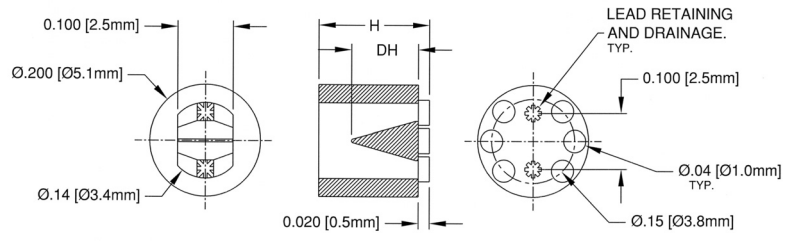

Note: A thin film of flash is allowed for improved retention