

# 晶采光電科技股份有限公司 AMPIRE AMPIRE CO., LTD.

# **SPECIFICATIONS FOR** LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AC-164A
APPROVED BY	
DATE	

AMPIRE CO., LTD. TOWER A, 4F, No.114, Sec. 1, HSIN-TAI 5th RD., HIS-CHIH, TAIPEI HSIEN, TAIWAN(R.O.C.)

台北縣汐止鎮新台五路一段114號4樓(東方科學園區A棟) TEL:886-2-26967269, FAX:886-2-26967196 or 886-2-26967270

APPROVED BY	CHECKED BY	ORGANIZED BY

# **RECORD OF REVISION**

<b>Revision Date</b>	Page	Contents
1999/9/1	-	New Release
2000/10/5	14	Modify Sampling Plan
2001/12/12		Modify LED characteristic

#### 1 FEATURES

(1) Display format : 16 characters  $\times$  4 lines

(2) Construction: STN LCD, Bezel, Zebra and PCB.

(3) Optional LED or EL back-light.

(4) Controller: KS0066U or Equivalent.

(5) 5V single power input. (Special request for 3.3V driving, built-in DC/DC converter.)

(6) Normal / Extended temperature type.

(7) Excellent LC: VOP maintains at 5V for whole temp. range, no need extra temp. compensation circuit.

#### 2 NUMBERING SYSTEM

No	Code Value	Description	Remark
1	G	STN gray type LCD	LCD Type
	Y	STN yellow green type LCD	
	S	STN negative type LCD	
2	A	Reflective type / 6:00 view	Polarizer / Viewing Angel
	В	Reflective type / 12:00 view	
	Ι	Transflective type / 6:00 view	
	J	Transflective type / 12:00 view	
	Т	Negative type / 6:00 view	
	U	Negative type / 12:00 view	
3	None	Without backlight	Backlight type
	L	5V LED	
	Е	EL	
4	None	Without backlight	Backlight color
	Y	Yellow-green (LED)	
	В	Blue (EL)	
	W	White (EL)	
5	None	Normal temperature type	LCM temperature type
	Н	Extended temperature type	

# 3 MECHANICAL DATA

Parameter	Stand Value	Unit
Dot size	$0.55(W) \times 0.55(H)$	mm
Dot pitch	$0.60(W) \times 0.60(H)$	mm
Character size	2.95(W) × 4.75(H)	mm
Viewing area	61.4(W) × 25.0(H)	mm
Module size	$87.0(W) \times 60.0(H) \times 11.0 \text{ max (T)}$	mm
Module size (w/ LED back-light)	$87.0(W) \times 60.0(H) \times 14.0 \text{ max (T)}$	mm


# 4 ABSOLUTE MAXIMUM RATINGS

Para	meter	Symbol	Min	Max	Unit
Logic Circuit	Supply Voltage	VDD-VSS	-0.3	7.0	V
LCD Driv	ing Voltage	VDD-VO	-0.3	10.0	V
Input '	Voltage	VI	-0.3	VDD+0.3	V
Normal temp. type	Operating Temp.	ТОР	0	50	°C
	Storage Temp.	TSTG	-20	70	°C
Extended temp. type	xtended temp. type Operating Temp.		-20	70	°C
	Storage Temp.	TSTG	-30	80	°C

## 5 ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Тур	Max	Unit	Note
		Electro	nic Chara	cteristics			
Logic Circuit Supply Voltage	VDD-VSS		2.7		5.5	V	
LCD Driving	VDD-VO	-20 °C	4.75	5.0	5.25	V	$0 \sim 50$ °C for
Voltage		0 °C	4.75	5.0	5.25		Normal Temp. type
		25 °C	4.75	5.0	5.25		$-20 \sim 70$ °C for
		50 °C	4.75	5.0	5.25	•	Extended Temp.
		70 °C	4.75	5.0	5.25	•	type
Input Voltage	VIH		0.7 VDD		VDD	V	
	VIL		VSS		0.3 VDD	V	
Logic Supply Current	IDD	VDD = 5V		1.2	1.7	mA	
		Optica	al Charact	teristics -			
Contrast	CR	25°C		5			Note 1
Rise Time	tr	25°C		200	300	ms	Note 2
Fall Time	tf	25°C		200	300	ms	
Viewing Angle	θf	25°C &		40			Note 3
Range	θЬ	CR≥2		35		Deg.	
	θ1			35			
	θr			35			
Frame Frequency	fF	25°C		64		Hz	
		- LED Back	-light Cha	racterist	tics		
Forward Voltage	VF			4.05	4.3	V	Supply Voltage between A&K
Forward Current	IF	VF=4.05V		220		mA	
LCM Luminou	s intensity	VF=4.05V		30		$cd/m^2$	

\* LED Dice number =  $2 \times 22 = 44$ 

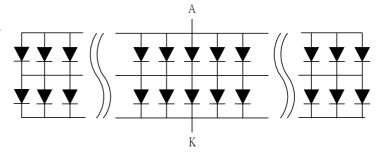


EL Back-light Characteristics										
Parameter	Min	Тур	Max	Unit	Note					
Driving Voltage		110		Vrms						
Frequency		400		Hz						
LCM Luminous intensity		15		cd/m <sup>2</sup>						


# (NOTE 1) Contrast ratio:

CR = (Brightness in OFF state) / (Brightness in ON state)


# ( NOTE 2 ) Response time :

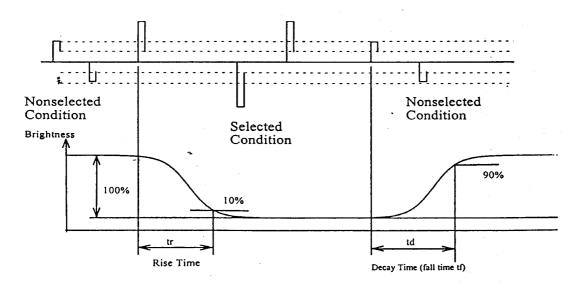

(NOTE 3) Viewing angle

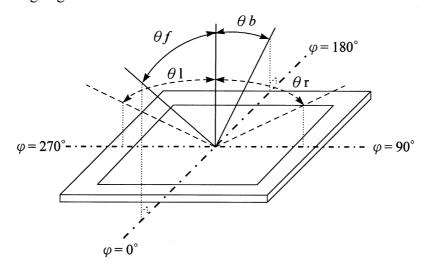



# 6 BLOCK DIAGRAM & INTERFACE

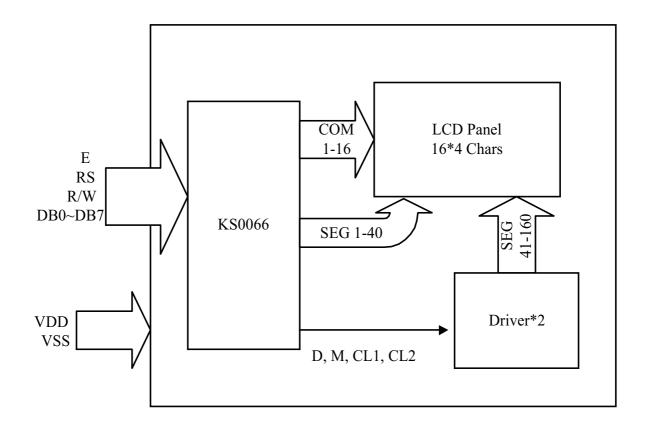

No.	Symbol	Function
1	VSS	Ground (0V)
2	VDD	Supply Voltage for Logic (+5V or +3.3V)
3	VO	Contrast Adjustment
4	RS	Data/Instruction Select
5	R/W	Read/Write Select
6	Е	Enable Signal
7	DB0	Data Bus
8	DB1	Data Bus
9	DB2	Data Bus
10	DB3	Data Bus
11	DB4	Data Bus
12	DB5	Data Bus
13	DB6	Data Bus
14	DB7	Data Bus
15	LED_A	LED Power Supply + (5V)
16	LED_K	LED Power Supply - (5V)


#### 7 POWER SUPPLY

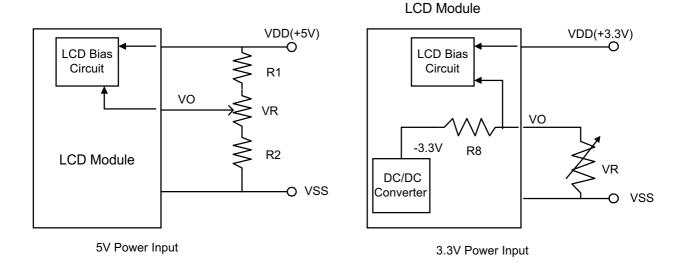

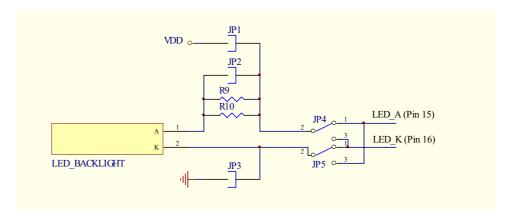


There are four methods to light up the LED back-light: (Please indicate while ordering.)

- (1) Built-in current-limit resistor(R9/R10). Add +5V between Pin15&16. (Default)
- (2) Add +4.05V between LED A & K directly.
- (3) Short JP2 and add +4.05V between Pin15&16.
- (4) Built-in current-limit resistor(R9/R10) and short JP1&JP3. Use the same power (+5V) with the logic circuit.

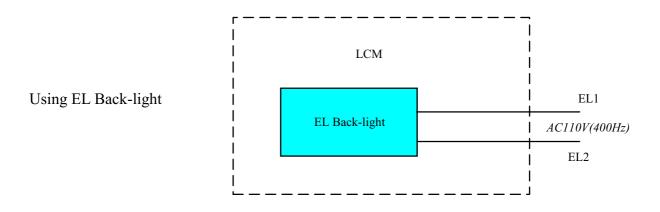


# **8 TIMING CHARACTERISTICS**

# **Write Operation**

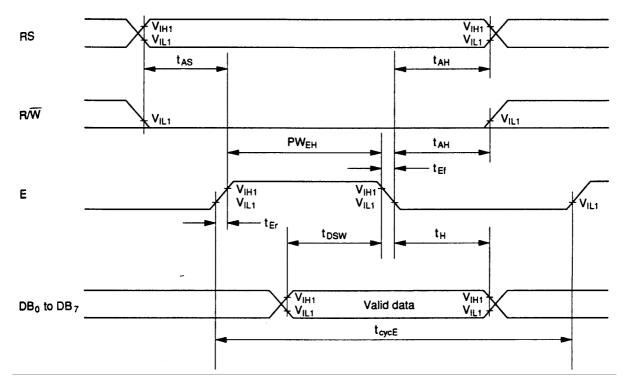

Item	Symbol	VDD	)=5V	VDD=	Unit	
		Min	Max	Min	Max	
Enable cycle time	tcycE	500		1000		ns
Enable pulse width	PWEH	230		450		
Enable rise/fall time	tEr,tEf		20		25	
Address set-up time (RS, R/W to E)	tAS	40		60		
Address hold time	tAH	10		20		
Data set-up time	tDSW	80		195		
Data hold time	tH	10		10		

# **Read Operation**

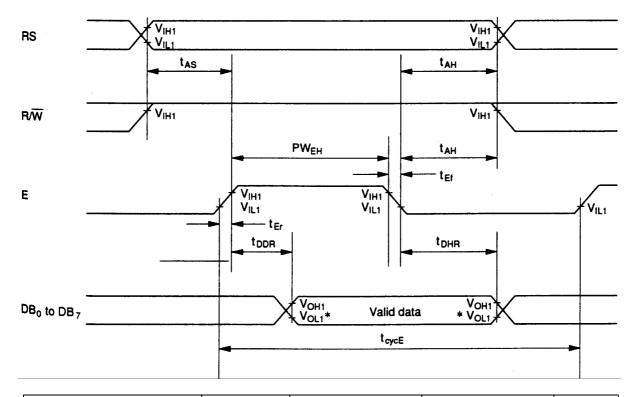

Item	Symbol	VDE	)=5V	VDD:	VDD=3.3V		
		Min	Max	Min	Max		
Enable cycle time	tcycE	500		1000		ns	
Enable pulse width	PWEH	230		450			
Enable rise/fall time	tEr,tEf		20		25		
Address set-up time (RS, R/W to E)	tAS	40		60			
Address hold time	tAH	10		20			
Data delay time	tDDR		120		360		
Data hold time	tDRH	5		5			


#### 9 INSTRUCTION SET

Instruction	Code							Description	E.T.(fosc			
	RS	R/ W	D7	D6	D5	D4	D3	D2	D1	D0		=270 KHZ)
Clear Display	0	0	0	0	0	0	0	0	0	1	Write"20H" to DDRAM and set DDRAM address to "00H" from AC	1.53 ms
Return Home	0	0	0	0	0	0	0	0	1		Sets DD RAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.53 ms
Entry Mode SET	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	39 μS
Display ON/OFF Control	0	0	0	0	0	0	1	D	С	В	Set display (D), cursor (C), and blink of cursor (B) on/off control bit.	39 μS
Cursor or Display Shift	0	0	0	0	0	1	S/ C	R/ L			Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	39 μS
Function Set	0	0	0	0	1	DL	N	F			Sets interface data length (DL:8-bit/4-bit), number of display lines (N:2-line/1-line) and , display font type (F:5x11dots/5x8 dost).	39 μS
Set CG RAM Address	0	0	0	1	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0	Sets CG RAM address in address counter.	39 μS
Set DD RAM Address	0	0	1	AC 6	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0	Sets DD RAM address in address counter.	39 μS
Read Busy Flag and Address	0	1	BF	AC 6	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μS
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Writes data into internal RAM (DD RAM /CG RAM).	43 μS
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Reads data from internal RAM (DD RAM /CG RAM).	43 μS

<sup>\* &</sup>quot;--": don't care

Note: When an MPU program with checking the Busy Flag(DB7) is made, it must be necessary 1/2Fosc is necessary for executing the next instruction by the falling edge of the 'E' signal after the Busy Flag(DB7) goes to "LOW".

### 10 INITIALIZATION SEQUENCE

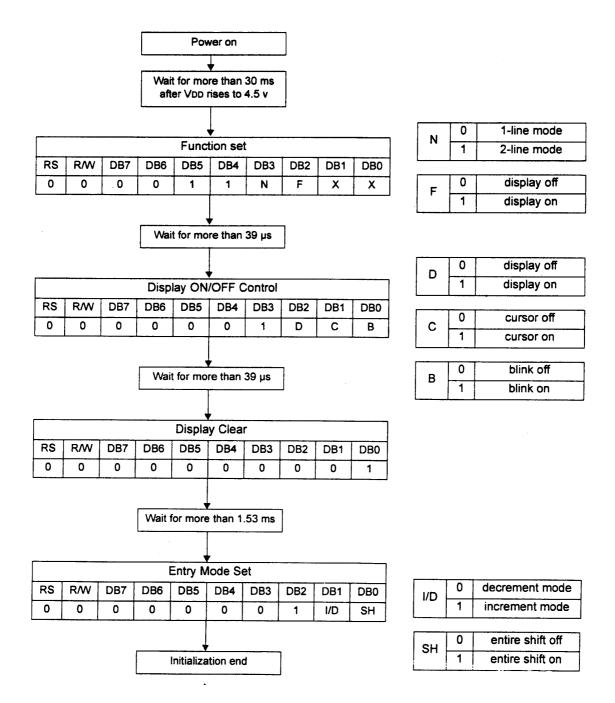

#### 11 DD RAM ADDRESS

CHAR.	1	2	3	•••	14	15	16
LINE 1	00	01	02	•••	0D	0E	0F
LINE 2	40	41	42	•••	4D	<b>4</b> E	4F
LINE 3	10	11	12	•••	1D	1E	1F
LINE 4	50	51	52		5D	5E	5F

# 12 FONT TABLE

Upper 4bit Lower	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	гинн	HLLL	нын	нгнг	нин	нны	ннгн	нинт.	нннн
LLLL	CG RAM (1)															
LLLH	(2)															
LLIIL	(3)	CACATACA CACATACAT														
LLIIII	(4)															
LHLL	(5)									000000000000000000000000000000000000000						
LHLH	(6)															
ГИНГ	(7)												CODDO CODDO CODDO CODDO CODDO			
ІННН	(8)															
HLLL	(1)															
HLLH	(2)					668661				88888	20000		20000			
нгнг	(3)					00000	88888		25522	66655	00000					
нгнн	(4)															
HHLL	(5)			06800												
ннгн	(6)									00000	00000	00000				
нинг	(7)	66655														
нннн	(8)															

#### 13 QUALITY AND RELIABILITY

#### 13.1 TEST CONDITIONS

Tests should be conducted under the following conditions:

Ambient temperature :  $25 \pm 5$ °C

Humidity :  $60 \pm 25\%$  RH.

#### 13.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E , level II, normal single sampling plan .

#### 13.3 ACCEPTABLE QUALITY LEVEL


A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.

#### 13.4 APPEARANCE

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under flourescent light. The inspection area of LCD panel shall be within the range of following limits.

# 13.5 INSPECTION QUALITY CRITERIA

Item	Description	of de	fects		Class of Defects	Acceptable level		
Function	Short circuit of	Major	0.65					
Dimension	Deviation from	Major	1.5					
Black spots	Ave . dia . D area A			area B	Minor	2.5		
1	D≤0.2	Г	Disrega	rd				
	0.2 <d≤0.3< td=""><td>3</td><td colspan="2">4</td><td></td><td></td></d≤0.3<>	3	4					
	0.3 <d≤0.4< td=""><td>2</td><td></td><td>3</td><td>•</td><td colspan="2"></td></d≤0.4<>	2		3	•			
	0.4 <d< td=""><td>0</td><td></td><td>1</td><td></td><td></td></d<>	0		1				
Black lines	Width W, Length 1	Ĺ	A	В	Minor	2.5		
	W≤0.03		disr	egard				
	0.03 <w≤0.05< td=""><td></td><td>3</td><td>4</td><td></td><td></td></w≤0.05<>		3	4				
	0.05 <w≤0.07, l≤3<="" td=""><td colspan="3">0.05<w≤0.07 ,="" l≤3.0<="" td=""><td></td><td colspan="3"></td></w≤0.07></td></w≤0.07,>	0.05 <w≤0.07 ,="" l≤3.0<="" td=""><td></td><td colspan="3"></td></w≤0.07>						
	See line criteria							
Bubbles in	Average diameter D	0.2 < I	Minor	2.5				
polarizer	for $N = 4$ , $D >$	0.5 for						
Color	Rainbow color o	r newto		Minor	2.5			
uniformity								
Glass	Obvious visib		Minor	2.5				
Scratches								
Contrast	See no	ote 1		Minor	2.5			
ratio	~				2.51			
Response	See no	ote 2		Minor	2.5			
time	~				2.51	2.5		
Viewing	See note 3				Minor	2.5		
angle								

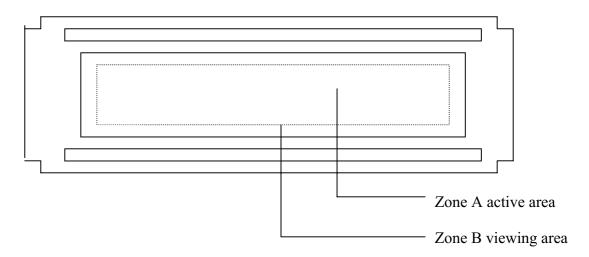

#### 13.6 RELIABILITY

	Test Conditions						
Test Item	Normal Temp. type	Extended Temp. type	Note				
High Temperature Operation	50±3°C, t=96 hrs	70±3°C, t=96 hrs					
Low Temperature Operation	0±3°C, t=96 hrs	-20±3°C, t=96 hrs					
High Temperature Storage	70±3°C, t=96 hrs	80±3°C, t=96 hrs	1,2				
Low Temperature Storage	-20±3°C, t=96 hrs	-30±3°C, t=96 hrs	1,2				
Temperature Cycle	-20°C ~ 25°C ~ 70°C 30 m in. 5 min. 30 min. (1 cycle) Total 5 cycle		1,2				
Humidity Test	40 °C, Humidity 90%, 96 hrs						
Vibration Test (Packing)	Sweep frequency: 10 ~ 55 ~ 10 Hz/1min Amplitude: 0.75mm Test direction: X.Y.Z/3 axis Duration: 30min/each axis						

Note 1 : Condensation of water is not permitted on the module.

Note 2: The module should be inspected after 1 hour storage in normal conditions (15-35°C, 45-65%RH).

## Definitions of life end point:

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

#### 14 HANDLING PRECAUTIONS

- (1) A LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in color.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.
- (10) Protect the module against static electricity and observe appropriate anti-static precautions.

# 15 OUTLINE DIMENSION

164A

