

# MGSF2N02EL

Preferred Device

## Power MOSFET

### 2.8 Amps, 20 Volts, N-Channel SOT-23

These miniature surface mount MOSFETs low  $R_{DS(on)}$  assure minimal power loss and conserve energy, making these devices ideal for use in space sensitive power management circuitry.

#### Features

- Pb-Free Packages are Available
- Low  $R_{DS(on)}$  Provides Higher Efficiency and Extends Battery Life
- Miniature SOT-23 Surface Mount Package Saves Board Space
- $I_{DSS}$  Specified at Elevated Temperature

#### Applications

- DC-DC Converters
- Power Management in Portable and Battery Powered Products, ie: Computers, Printers, PCMCIA Cards, Cellular and Cordless Telephones

#### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Drain-to-Source Voltage	$V_{DSS}$	20	Vdc
Gate-to-Source Voltage - Continuous	$V_{GS}$	$\pm 8.0$	Vdc
Drain Current			A
- Continuous @ $T_A = 25^\circ\text{C}$	$I_D$	2.8	
- Single Pulse ( $t_p = 10 \mu\text{s}$ )	$I_{DM}$	5.0	
Total Power Dissipation @ $T_A = 25^\circ\text{C}$	$P_D$	1.25	W
Operating and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$
Thermal Resistance			$^\circ\text{C/W}$
Junction-to-Ambient (Note 1)	$R_{\theta JA}$	100	
Junction-to-Ambient (Note 2)		300	
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	$T_L$	260	$^\circ\text{C}$

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. 1" Pad,  $t < 10$  sec.
2. Min pad, steady state.


This document contains information on a new product. Specifications and information herein are subject to change without notice.




ON Semiconductor®

<http://onsemi.com>


2.8 A, 20 V  
 $R_{DS(on)} = 85 \text{ m}\Omega$  (max)



#### MARKING DIAGRAM




SOT-23  
CASE 318  
STYLE 21



NT = Device Code  
M = Date Code

#### PIN ASSIGNMENT



#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

# MGSF2N02EL

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage (Note 3) ( $V_{GS} = 0\text{ Vdc}$ , $I_D = 10\ \mu\text{Adc}$ ) Temperature Coefficient (Positive)	$V_{(BR)DSS}$	20 –	– 22	– –	Vdc mV/°C
Zero Gate Voltage Drain Current ( $V_{DS} = 20\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ) ( $V_{DS} = 20\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ , $T_J = 125^\circ\text{C}$ )	$I_{DSS}$	– –	– –	1.0 10	$\mu\text{Adc}$
Gate-Source Leakage Current ( $V_{GS} = \pm 8.0\text{ Vdc}$ , $V_{DS} = 0\text{ Vdc}$ )	$I_{GSS}$	–	–	$\pm 100$	nA

### ON CHARACTERISTICS (Note 3)

Gate-Source Threshold Voltage ( $V_{DS} = V_{GS}$ , $I_D = 250\ \mu\text{Adc}$ ) Threshold Temperature Coefficient (Negative)	$V_{GS(th)}$	0.5 –	– –2.3	1.0 –	Vdc mV/°C
Static Drain-to-Source On-Resistance ( $V_{GS} = 4.5\text{ Vdc}$ , $I_D = 3.6\text{ A}$ ) ( $V_{GS} = 2.5\text{ Vdc}$ , $I_D = 3.1\text{ A}$ )	$R_{DS(on)}$	– –	78 105	85 115	m $\Omega$

### DYNAMIC CHARACTERISTICS

Input Capacitance	$(V_{DS} = 5.0\text{ Vdc}$ , $V_{GS} = 0\text{ V}$ , $f = 1.0\text{ MHz}$ )	$C_{iss}$	–	150	–	pF
Output Capacitance		$C_{oss}$	–	130	–	
Transfer Capacitance		$C_{riss}$	–	45	–	

### SWITCHING CHARACTERISTICS (Note 4)

Turn-On Delay Time	$(V_{DD} = 16\text{ Vdc}$ , $I_D = 2.8\text{ Adc}$ , $V_{gs} = 4.5\text{ V}$ , $R_G = 2.3\ \Omega$ )	$t_{d(on)}$	–	6.0	–	ns
Rise Time		$t_r$	–	95	–	
Turn-Off Delay Time		$t_{d(off)}$	–	28	–	
Fall Time		$t_f$	–	125	–	
Gate Charge	$(V_{DS} = 16\text{ Vdc}$ , $I_D = 1.75\text{ Adc}$ , $V_{GS} = 4.0\text{ Vdc}$ ) (Note 3)	$Q_T$	–	3.5	–	nC
		$Q_{gs}$	–	0.6	–	
		$Q_{gd}$	–	1.5	–	

### SOURCE-DRAIN DIODE CHARACTERISTICS

Forward Voltage	$(I_S = 1.0\text{ Adc}$ , $V_{GS} = 0\text{ Vdc}$ ) (Note 3)	$V_{SD}$	– –	0.76 –	1.2 –	V
Reverse Recovery Time		$(I_S = 1.0\text{ Adc}$ , $V_{GS} = 0\text{ Vdc}$ , $di_S/dt = 100\text{ A}/\mu\text{s}$ ) (Note 3)	$t_{rr}$	–	104	–
	$t_a$		–	42	–	
	$t_b$		–	62	–	
Reverse Recovery Stored Charge	$Q_{RR}$		–	0.20	–	$\mu\text{C}$

3. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$ .


4. Switching characteristics are independent of operating junction temperature.

## ORDERING INFORMATION


Device	Package	Shipping†
MGSF2N02ELT1	SOT-23	3,000 Tape & Reel
MGSF2N02ELT1G	SOT-23 (Pb-Free)	3,000 Tape & Reel
MGSF2N02ELT3	SOT-23	10,000 Tape & Reel
MGSF2N02ELT3G	SOT-23 (Pb-Free)	10,000 Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


# MGSF2N02EL

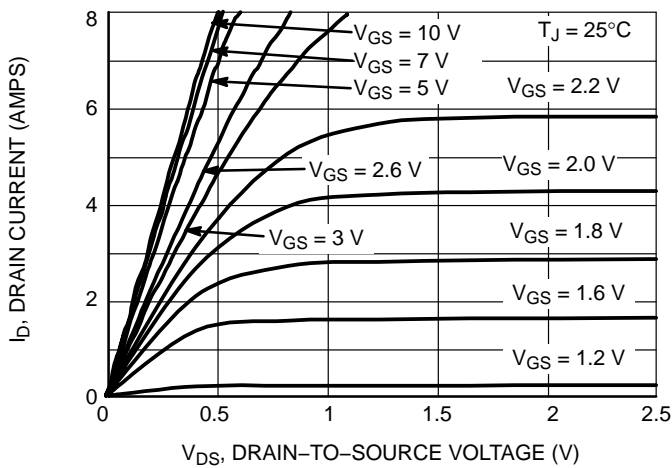


**Figure 1. On-Region Characteristics**

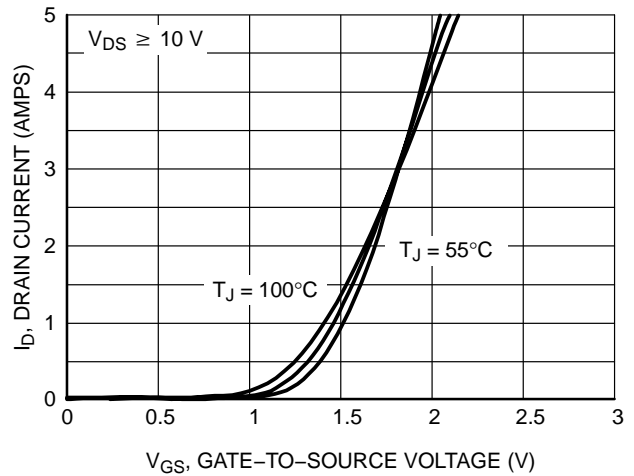


**Figure 2. Transfer Characteristics**

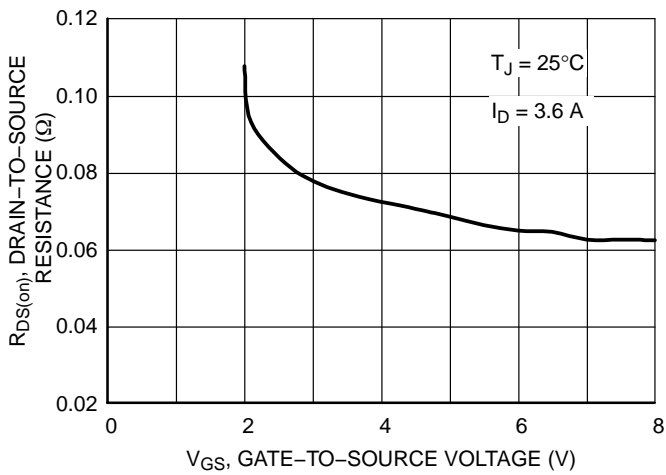


**Figure 3. On-Resistance vs. Gate-to-Source Voltage**

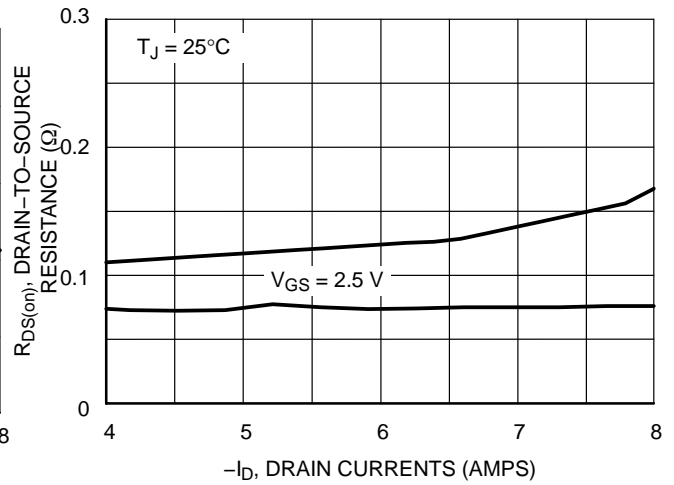

**Figure 4. On-Resistance vs. Drain Current**

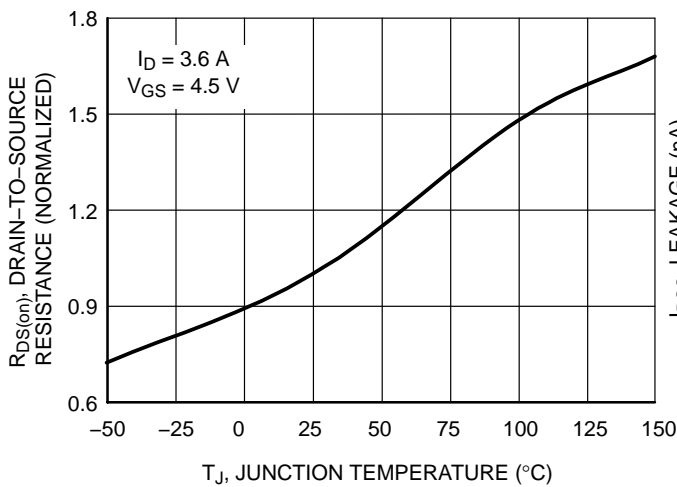


**Figure 5. On-Resistance Variation with Temperature**

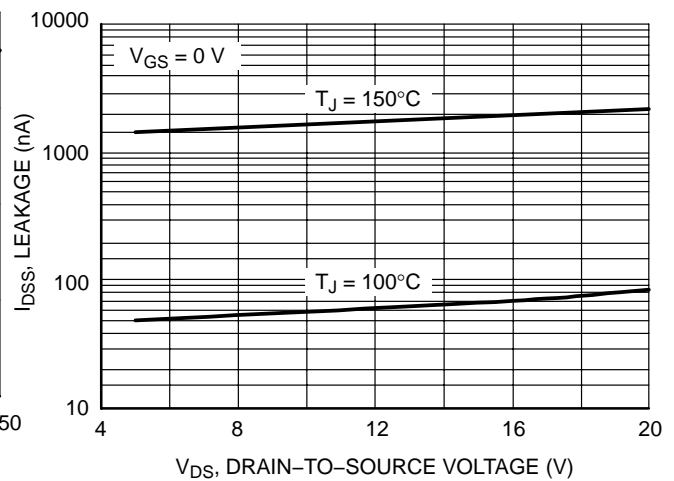


**Figure 6. Drain-to-Source Leakage Current vs. Voltage**


# MGSF2N02EL

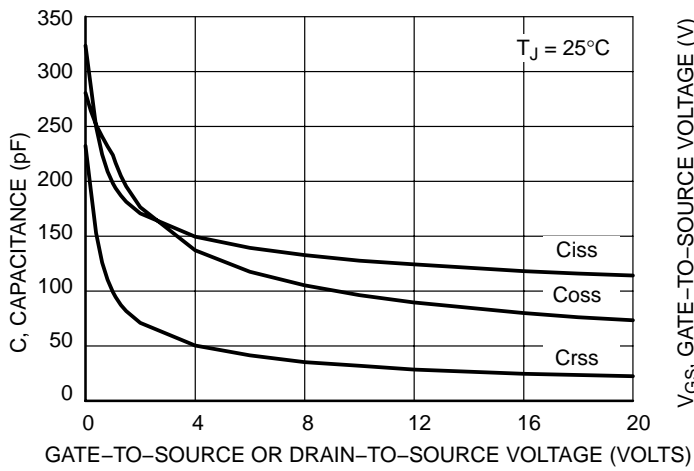


**Figure 7. Capacitance Variation**

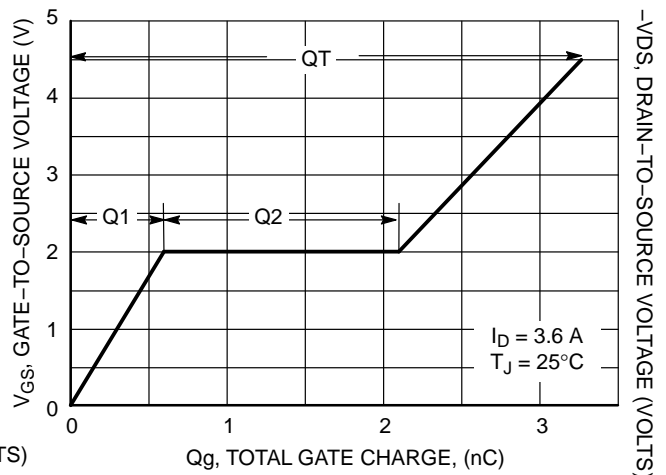

**Figure 8. Gate-to-Source Voltage vs. Total Charge**

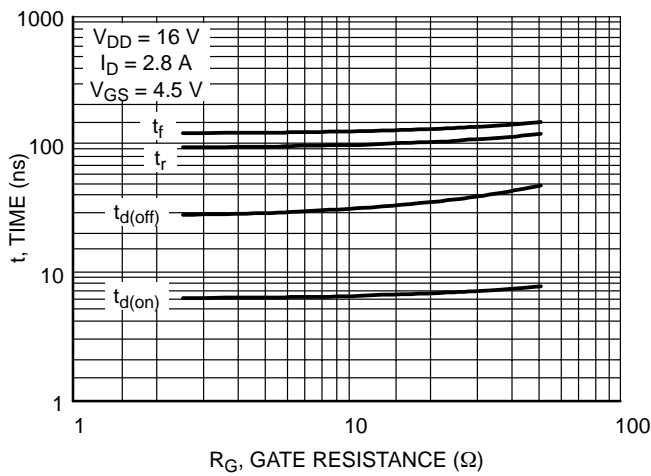

**Figure 9. Resistive Switching Time Variation vs. Gate Resistance**

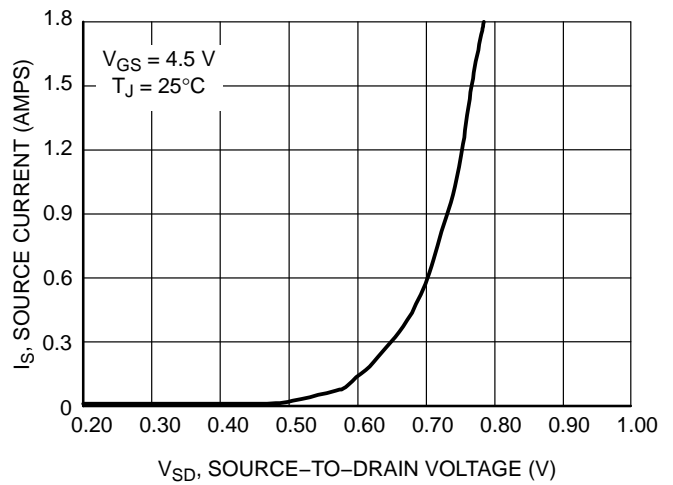


**Figure 10. Diode Forward Voltage vs. Current**

# MGSF2N02EL

## PACKAGE DIMENSIONS

SOT-23 (TO-236)  
CASE 318-08  
ISSUE AJ

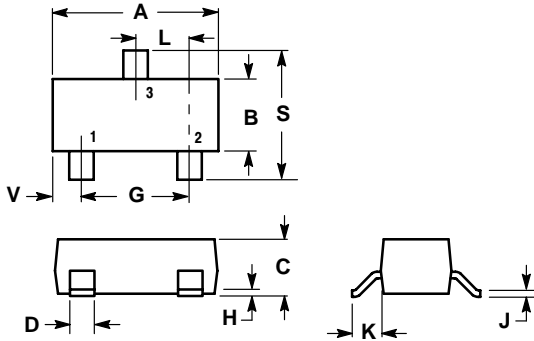

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. 318-03 AND -07 OBSOLETE, NEW STANDARD 318-08.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

**STYLE 21:**


- PIN 1. GATE
- SOURCE
- DRAIN

### SOLDERING FOOTPRINT\*

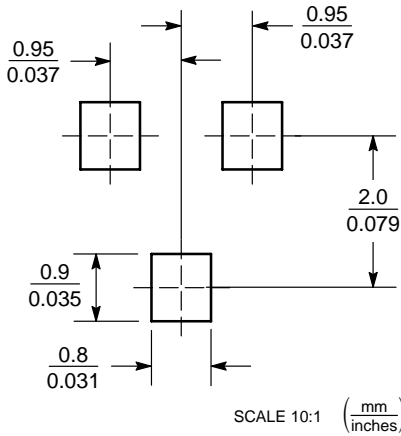

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MGSF2N02EL

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your  
local Sales Representative.

**MGSF2N02EL/D**