

MBB SERIES

PB6FG—XXXXZ2:1 1KV ISOLATED 1 W REGULATED DUAL OUTPUT DIP16

Available Inputs: 9 – 18 VDC Wide Input, 18 – 36 VDC Wide Input

Available Outputs: (+/-) 3.3 and 5 VDC for 9 - 18 VDC Input

Available Outputs: (+/-) 5, 12, 15 and 18 VDC for 18 - 36 VDC Input

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 12 VDC, 9~18 VDC, 24 VDC, 18~36 VDC
 Filter Pi Filter

Isolation Specifications

Rated voltage 1000 VDC
 Resistance 1000 MOhm
 Capacitance 80 pF typ.

Output Specifications

Voltage accuracy +/- 1 %, max.
 Ripple and noise (at 20 MHz BW) 75 mV p-p, typ.
 Short circuit protection Continuous and Auto - Restart
 Line voltage regulation +/- 0,5 % max.
 Load voltage regulation +/- 2 % max.
 Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 72 % to 75 %
 Switching frequency 150 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 25° C to + 71° C
 Storage temperature - 55 °C to + 125 °C
 Derating See graph


Physical Characteristics

Case material Non conductive black plastic

Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT FULL LOAD Typ.	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
PB6FG-123R3Z2:1	9 - 18	115	+/- 3.3	+/- 150	72
PB6FG-1205Z2:1	9 - 18	114	+/- 5	+/- 100	73
PB6FG-2405Z2:1	18 - 36	57	+/- 5	+/- 100	73
PB6FG-2412Z2:1	18 - 36	66	+/- 12	+/- 50	76
PB6FG-2415Z2:1	18 - 36	67	+/- 15	+/- 40	75
PB6FG-2418Z2:1	18 - 36	58	+/- 18	+/- 30	77

Dimensions

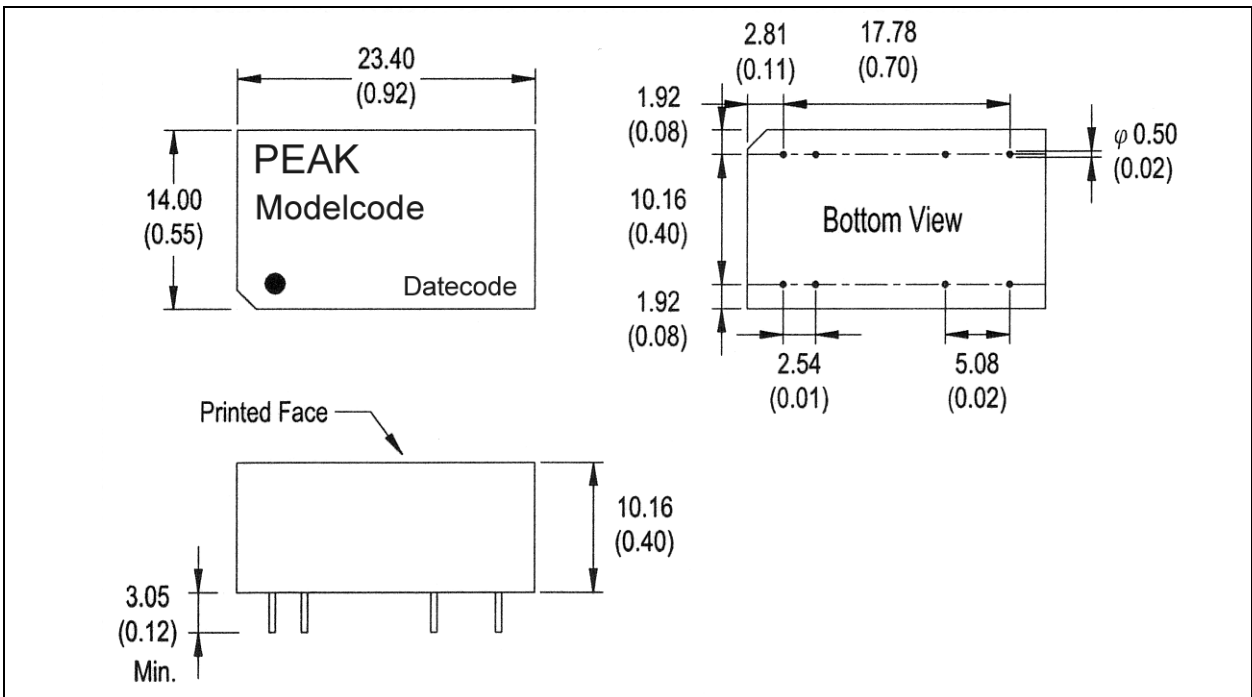

Derating Graph and Pinning

