



**FEATURES:**

- RoHS compliant
- High efficiency up to 80%
- Low profile plastic package
- 7 pin SIP package
- Operating temperature -40°C to + 85°C
- Short circuit protection
- Pin compatible with multiple manufacturers
- Input / Output Isolation 1000, 3000, 4000, 5200 & 6000 VDC

**Models**  
**Single output**



Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency
AM1D-0503SZ	4.5-5.5	3.3	300	1000	74
AM1D-0505SZ	4.5-5.5	5	200	1000	80
AM1D-0507SZ	4.5-5.5	7.2	140	1000	78
AM1D-0509SZ	4.5-5.5	9	110	1000	75
AM1D-0512SZ	4.5-5.5	12	83	1000	77
AM1D-0515SZ	4.5-5.5	15	70	1000	77
AM1D-0518SZ	4.5-5.5	18	55	1000	78
AM1D-0524SZ	4.5-5.5	24	40	1000	75
AM1D-1203SZ	10.8-13.2	3.3	300	1000	74
AM1D-1205SZ	10.8-13.2	5	200	1000	79
AM1D-1207SZ	10.8-13.2	7.2	140	1000	74
AM1D-1209SZ	10.8-13.2	9	110	1000	75
AM1D-1212SZ	10.8-13.2	12	83	1000	79
AM1D-1215SZ	10.8-13.2	15	70	1000	79
AM1D-1218SZ	10.8-13.2	18	55	1000	78
AM1D-1224SZ	10.8-13.2	24	40	1000	76
AM1D-2403SZ	21.6-26.4	3.3	300	1000	65
AM1D-2405SZ	21.6-26.4	5	200	1000	72
AM1D-2407SZ	21.6-26.4	7.2	140	1000	76
AM1D-2409SZ	21.6-26.4	9	110	1000	75
AM1D-2412SZ	21.6-26.4	12	83	1000	79
AM1D-2415SZ	21.6-26.4	15	70	1000	79
AM1D-2418SZ	21.6-26.4	18	55	1000	78
AM1D-2424SZ	21.6-26.4	24	40	1000	75
AM1D-0503SH30Z	4.5-5.5	3.3	300	3000	74
AM1D-0505SH30Z	4.5-5.5	5	200	3000	80
AM1D-0507SH30Z	4.5-5.5	7.2	140	3000	78
AM1D-0509SH30Z	4.5-5.5	9	110	3000	75
AM1D-0512SH30Z	4.5-5.5	12	83	3000	77
AM1D-0515SH30Z	4.5-5.5	15	70	3000	77
AM1D-0518SH30Z	4.5-5.5	18	55	3000	78
AM1D-0524SH30Z	4.5-5.5	24	40	3000	75
AM1D-1203SH30Z	10.8-13.2	3.3	300	3000	74
AM1D-1205SH30Z	10.8-13.2	5	200	3000	79
AM1D-1207SH30Z	10.8-13.2	7.2	140	3000	74
AM1D-1209SH30Z	10.8-13.2	9	110	3000	76
AM1D-1212SH30Z	10.8-13.2	12	83	3000	80
AM1D-1215SH30Z	10.8-13.2	15	70	3000	80
AM1D-1218SH30Z	10.8-13.2	18	55	3000	78
AM1D-1224SH30Z	10.8-13.2	24	40	3000	76
AM1D-2403SH30Z	21.6-26.4	3.3	300	3000	74
AM1D-2405SH30Z	21.6-26.4	5	200	3000	80
AM1D-2407SH30Z	21.6-26.4	7.2	140	3000	71
AM1D-2409SH30Z	21.6-26.4	9	110	3000	75

**Models**

**Single output (continued)**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-2412SH30Z	21.6-26.4	12	83	3000	78
AM1D-2415SH30Z	21.6-26.4	15	70	3000	78
AM1D-2418SH30Z	21.6-26.4	18	55	3000	78
AM1D-2424SH30Z	21.6-26.4	24	40	3000	75
AM1D-0503SH40Z	4.5-5.5	3.3	300	4000	74
AM1D-0505SH40Z	4.5-5.5	5	200	4000	80
AM1D-0507SH40Z	4.5-5.5	7.2	140	4000	78
AM1D-0509SH40Z	4.5-5.5	9	110	4000	75
AM1D-0512SH40Z	4.5-5.5	12	83	4000	77
AM1D-0515SH40Z	4.5-5.5	15	70	4000	77
AM1D-0518SH40Z	4.5-5.5	18	55	4000	78
AM1D-0524SH40Z	4.5-5.5	24	40	4000	75
AM1D-1203SH40Z	10.8-13.2	3.3	300	4000	74
AM1D-1205SH40Z	10.8-13.2	5	200	4000	79
AM1D-1207SH40Z	10.8-13.2	7.2	140	4000	74
AM1D-1209SH40Z	10.8-13.2	9	110	4000	75
AM1D-1212SH40Z	10.8-13.2	12	83	4000	79
AM1D-1215SH40Z	10.8-13.2	15	70	4000	79
AM1D-1218SH40Z	10.8-13.2	18	55	4000	78
AM1D-1224SH40Z	10.8-13.2	24	40	4000	76
AM1D-2403SH40Z	21.6-26.4	3.3	300	4000	65
AM1D-2405SH40Z	21.6-26.4	5	200	4000	72
AM1D-2407SH40Z	21.6-26.4	7.2	140	4000	76
AM1D-2409SH40Z	21.6-26.4	9	110	4000	75
AM1D-2412SH40Z	21.6-26.4	12	83	4000	79
AM1D-2415SH40Z	21.6-26.4	15	70	4000	79
AM1D-2418SH40Z	21.6-26.4	18	55	4000	78
AM1D-2424SH40Z	21.6-26.4	24	40	4000	75
AM1D-0503SH52Z	4.5-5.5	3.3	300	5200	74
AM1D-0505SH52Z	4.5-5.5	5	200	5200	80
AM1D-0507SH52Z	4.5-5.5	7.2	140	5200	78
AM1D-0509SH52Z	4.5-5.5	9	110	5200	75
AM1D-0512SH52Z	4.5-5.5	12	83	5200	77
AM1D-0515SH52Z	4.5-5.5	15	70	5200	77
AM1D-0518SH52Z	4.5-5.5	18	55	5200	78
AM1D-0524SH52Z	4.5-5.5	24	40	5200	75
AM1D-1203SH52Z	10.8-13.2	3.3	300	5200	74
AM1D-1205SH52Z	10.8-13.2	5	200	5200	79
AM1D-1207SH52Z	10.8-13.2	7.2	140	5200	74
AM1D-1209SH52Z	10.8-13.2	9	110	5200	76
AM1D-1212SH52Z	10.8-13.2	12	83	5200	80
AM1D-1215SH52Z	10.8-13.2	15	70	5200	80
AM1D-1218SH52Z	10.8-13.2	18	55	5200	78
AM1D-1224SH52Z	10.8-13.2	24	40	5200	76
AM1D-2403SH52Z	21.6-26.4	3.3	300	5200	74
AM1D-2405SH52Z	21.6-26.4	5	200	5200	80
AM1D-2407SH52Z	21.6-26.4	7.2	140	5200	71
AM1D-2409SH52Z	21.6-26.4	9	110	5200	75
AM1D-2412SH52Z	21.6-26.4	12	83	5200	78
AM1D-2415SH52Z	21.6-26.4	15	70	5200	78
AM1D-2418SH52Z	21.6-26.4	18	55	5200	78
AM1D-2424SH52Z	21.6-26.4	24	40	5200	75

**Models**

**Single output (continued)**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-0503SH60Z	4.5-5.5	3.3	300	6000	74
AM1D-0505SH60Z	4.5-5.5	5	200	6000	80
AM1D-0507SH60Z	4.5-5.5	7.2	140	6000	78
AM1D-0509SH60Z	4.5-5.5	9	110	6000	75
AM1D-0512SH60Z	4.5-5.5	12	83	6000	77
AM1D-0515SH60Z	4.5-5.5	15	70	6000	77
AM1D-0518SH60Z	4.5-5.5	18	55	6000	78
AM1D-0524SH60Z	4.5-5.5	24	40	6000	75
AM1D-1203SH60Z	10.8-13.2	3.3	300	6000	74
AM1D-1205SH60Z	10.8-13.2	5	200	6000	79
AM1D-1207SH60Z	10.8-13.2	7.2	140	6000	74
AM1D-1209SH60Z	10.8-13.2	9	110	6000	76
AM1D-1212SH60Z	10.8-13.2	12	83	6000	80
AM1D-1215SH60Z	10.8-13.2	15	70	6000	80
AM1D-1218SH60Z	10.8-13.2	18	55	6000	78
AM1D-1224SH60Z	10.8-13.2	24	40	6000	76
AM1D-2403SH60Z	21.6-26.4	3.3	300	6000	74
AM1D-2405SH60Z	21.6-26.4	5	200	6000	80
AM1D-2407SH60Z	21.6-26.4	7.2	140	6000	71
AM1D-2409SH60Z	21.6-26.4	9	110	6000	75
AM1D-2412SH60Z	21.6-26.4	12	83	6000	78
AM1D-2415SH60Z	21.6-26.4	15	70	6000	78
AM1D-2418SH60Z	21.6-26.4	18	55	6000	78
AM1D-2424SH60Z	21.6-26.4	24	40	6000	75

**Models**

**Dual output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-0503DZ	4.5-5.5	±3.3	±150	1000	72
AM1D-0505DZ	4.5-5.5	±5	±100	1000	75
AM1D-0507DZ	4.5-5.5	±7.2	±70	1000	76
AM1D-0509DZ	4.5-5.5	±9	±55	1000	80
AM1D-0512DZ	4.5-5.5	±12	±42	1000	80
AM1D-0515DZ	4.5-5.5	±15	±35	1000	79
AM1D-0518DZ	4.5-5.5	±18	±27	1000	76
AM1D-0524DZ	4.5-5.5	±24	±20	1000	65
AM1D-1203DZ	10.8-13.2	±3.3	±150	1000	72
AM1D-1205DZ	10.8-13.2	±5	±100	1000	76
AM1D-1207DZ	10.8-13.2	±7.2	±70	1000	75
AM1D-1209DZ	10.8-13.2	±9	±55	1000	79
AM1D-1212DZ	10.8-13.2	±12	±42	1000	79
AM1D-1215DZ	10.8-13.2	±15	±35	1000	78
AM1D-1218DZ	10.8-13.2	±18	±27	1000	75
AM1D-1224DZ	10.8-13.2	±24	±20	1000	68
AM1D-2403DZ	21.6-26.4	±3.3	±150	1000	72
AM1D-2405DZ	21.6-26.4	±5	±100	1000	76
AM1D-2407DZ	21.6-26.4	±7.2	±70	1000	74
AM1D-2409DZ	21.6-26.4	±9	±55	1000	78
AM1D-2412DZ	21.6-26.4	±12	±42	1000	78
AM1D-2415DZ	21.6-26.4	±15	±35	1000	77
AM1D-2418DZ	21.6-26.4	±18	±27	1000	74
AM1D-2424DZ	21.6-26.4	±24	±20	1000	65

**Models**

**Dual output (continued)**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-0503DH30Z	4.5-5.5	±3.3	±150	3000	72
AM1D-0505DH30Z	4.5-5.5	±5	±100	3000	75
AM1D-0507DH30Z	4.5-5.5	±7.2	±70	3000	76
AM1D-0509DH30Z	4.5-5.5	±9	±55	3000	80
AM1D-0512DH30Z	4.5-5.5	±12	±42	3000	80
AM1D-0515DH30Z	4.5-5.5	±15	±35	3000	79
AM1D-0518DH30Z	4.5-5.5	±18	±27	3000	76
AM1D-0524DH30Z	4.5-5.5	±24	±20	3000	65
AM1D-1203DH30Z	10.8-13.2	±3.3	±150	3000	72
AM1D-1205DH30Z	10.8-13.2	±5	±100	3000	76
AM1D-1207DH30Z	10.8-13.2	±7.2	±70	3000	75
AM1D-1209DH30Z	10.8-13.2	±9	±55	3000	79
AM1D-1212DH30Z	10.8-13.2	±12	±42	3000	72
AM1D-1215DH30Z	10.8-13.2	±15	±35	3000	75
AM1D-1218DH30Z	10.8-13.2	±18	±27	3000	76
AM1D-1224DH30Z	10.8-13.2	±24	±20	3000	80
AM1D-2403DH30Z	21.6-26.4	±3.3	±150	3000	80
AM1D-2405DH30Z	21.6-26.4	±5	±100	3000	79
AM1D-2407DH30Z	21.6-26.4	±7.2	±70	3000	76
AM1D-2409DH30Z	21.6-26.4	±9	±55	3000	65
AM1D-2412DH30Z	21.6-26.4	±12	±42	3000	72
AM1D-2415DH30Z	21.6-26.4	±15	±35	3000	76
AM1D-2418DH30Z	21.6-26.4	±18	±27	3000	75
AM1D-2424DH30Z	21.6-26.4	±24	±20	3000	79
AM1D-0503DH40Z	4.5-5.5	±3.3	±150	4000	79
AM1D-0505DH40Z	4.5-5.5	±5	±100	4000	78
AM1D-0507DH40Z	4.5-5.5	±7.2	±70	4000	75
AM1D-0509DH40Z	4.5-5.5	±9	±55	4000	68
AM1D-0512DH40Z	4.5-5.5	±12	±42	4000	72
AM1D-0515DH40Z	4.5-5.5	±15	±35	4000	76
AM1D-0518DH40Z	4.5-5.5	±18	±27	4000	74
AM1D-0524DH40Z	4.5-5.5	±24	±20	4000	78
AM1D-1203DH40Z	10.8-13.2	±3.3	±150	4000	78
AM1D-1205DH40Z	10.8-13.2	±5	±100	4000	77
AM1D-1207DH40Z	10.8-13.2	±7.2	±70	4000	74
AM1D-1209DH40Z	10.8-13.2	±9	±55	4000	65
AM1D-1212DH40Z	10.8-13.2	±12	±42	4000	72
AM1D-1215DH40Z	10.8-13.2	±15	±35	4000	75
AM1D-1218DH40Z	10.8-13.2	±18	±27	4000	76
AM1D-1224DH40Z	10.8-13.2	±24	±20	4000	80
AM1D-2403DH40Z	21.6-26.4	±3.3	±150	4000	80
AM1D-2405DH40Z	21.6-26.4	±5	±100	4000	79
AM1D-2407DH40Z	21.6-26.4	±7.2	±70	4000	76
AM1D-2409DH40Z	21.6-26.4	±9	±55	4000	65
AM1D-2412DH40Z	21.6-26.4	±12	±42	4000	72
AM1D-2415DH40Z	21.6-26.4	±15	±35	4000	76
AM1D-2418DH40Z	21.6-26.4	±18	±27	4000	75
AM1D-2424DH40Z	21.6-26.4	±24	±20	4000	79

**Models**  
**Dual output (continued)**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-0503DH52Z	4.5-5.5	±3.3	±150	5200	65
AM1D-0505DH52Z	4.5-5.5	±5	±100	5200	72
AM1D-0507DH52Z	4.5-5.5	±7.2	±70	5200	68
AM1D-0509DH52Z	4.5-5.5	±9	±55	5200	76
AM1D-0512DH52Z	4.5-5.5	±12	±42	5200	80
AM1D-0515DH52Z	4.5-5.5	±15	±35	5200	80
AM1D-0518DH52Z	4.5-5.5	±18	±27	5200	68
AM1D-0524DH52Z	4.5-5.5	±24	±20	5200	76
AM1D-1203DH52Z	10.8-13.2	±3.3	±150	5200	65
AM1D-1205DH52Z	10.8-13.2	±5	±100	5200	72
AM1D-1207DH52Z	10.8-13.2	±7.2	±70	5200	75
AM1D-1209DH52Z	10.8-13.2	±9	±55	5200	75
AM1D-1212DH52Z	10.8-13.2	±12	±42	5200	79
AM1D-1215DH52Z	10.8-13.2	±15	±35	5200	79
AM1D-1218DH52Z	10.8-13.2	±18	±27	5200	75
AM1D-1224DH52Z	10.8-13.2	±24	±20	5200	75
AM1D-2403DH52Z	21.6-26.4	±3.3	±150	5200	65
AM1D-2405DH52Z	21.6-26.4	±5	±100	5200	72
AM1D-2407DH52Z	21.6-26.4	±7.2	±70	5200	75
AM1D-2409DH52Z	21.6-26.4	±9	±55	5200	74
AM1D-2412DH52Z	21.6-26.4	±12	±42	5200	78
AM1D-2415DH52Z	21.6-26.4	±15	±35	5200	78
AM1D-2418DH52Z	21.6-26.4	±18	±27	5200	75
AM1D-2424DH52Z	21.6-26.4	±24	±20	5200	74
AM1D-0503DH60Z	4.5-5.5	±3.3	±150	6000	65
AM1D-0505DH60Z	4.5-5.5	±5	±100	6000	72
AM1D-0507DH60Z	4.5-5.5	±7.2	±70	6000	68
AM1D-0509DH60Z	4.5-5.5	±9	±55	6000	76
AM1D-0512DH60Z	4.5-5.5	±12	±42	6000	80
AM1D-0515DH60Z	4.5-5.5	±15	±35	6000	80
AM1D-0518DH60Z	4.5-5.5	±18	±27	6000	68
AM1D-0524DH60Z	4.5-5.5	±24	±20	6000	76
AM1D-1203DH60Z	10.8-13.2	±3.3	±150	6000	65
AM1D-1205DH60Z	10.8-13.2	±5	±100	6000	72
AM1D-1207DH60Z	10.8-13.2	±7.2	±70	6000	75
AM1D-1209DH60Z	10.8-13.2	±9	±55	6000	75
AM1D-1212DH60Z	10.8-13.2	±12	±42	6000	79
AM1D-1215DH60Z	10.8-13.2	±15	±35	6000	79
AM1D-1218DH60Z	10.8-13.2	±18	±27	6000	75
AM1D-1224DH60Z	10.8-13.2	±24	±20	6000	75
AM1D-2403DH60Z	21.6-26.4	±3.3	±150	6000	65
AM1D-2405DH60Z	21.6-26.4	±5	±100	6000	72
AM1D-2407DH60Z	21.6-26.4	±7.2	±70	6000	75
AM1D-2409DH60Z	21.6-26.4	±9	±55	6000	74
AM1D-2412DH60Z	21.6-26.4	±12	±42	6000	78
AM1D-2415DH60Z	21.6-26.4	±15	±35	6000	78
AM1D-2418DH60Z	21.6-26.4	±18	±27	6000	75
AM1D-2424DH60Z	21.6-26.4	±24	±20	6000	74

## Models

### Dual separate output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Efficiency (%)
AM1D-050303DZ	4.5-5.5	3.3/3.3	150/150	1000	75
AM1D-050505DZ	4.5-5.5	5/5	100/100	1000	72
AM1D-050707DZ	4.5-5.5	7.2/7.2	70/70	1000	73
AM1D-050909DZ	4.5-5.5	9/9	55/55	1000	75
AM1D-051212DZ	4.5-5.5	12/12	42/42	1000	80
AM1D-051515DZ	4.5-5.5	15/15	35 /35	1000	78
AM1D-051818DZ	4.5-5.5	18/18	27/27	1000	77
AM1D-052424DZ	4.5-5.5	24/24	20/20	1000	77
AM1D-120303DZ	10.8-13.2	3.3/3.3	150/150	1000	66
AM1D-120505DZ	10.8-13.2	5/5	100/100	1000	72
AM1D-120707DZ	10.8-13.2	7.2/7.2	70/70	1000	66
AM1D-120909DZ	10.8-13.2	9/9	55/55	1000	75
AM1D-121212DZ	10.8-13.2	12/12	42/42	1000	78
AM1D-121515DZ	10.8-13.2	15/15	35 /35	1000	80
AM1D-121818DZ	10.8-13.2	18/18	27/27	1000	75
AM1D-122424DZ	10.8-13.2	24/24	20/20	1000	72
AM1D-240303DZ	21.6-26.4	3.3/3.3	150/150	1000	66
AM1D-240505DZ	21.6-26.4	5/5	100/100	1000	72
AM1D-240707DZ	21.6-26.4	7.2/7.2	70/70	1000	72
AM1D-240909DZ	21.6-26.4	9/9	55/55	1000	78
AM1D-241212DZ	21.6-26.4	12/12	42/42	1000	80
AM1D-241515DZ	21.6-26.4	15/15	35 /35	1000	77
AM1D-241818DZ	21.6-26.4	18/18	27/27	1000	75
AM1D-242424DZ	21.6-26.4	24/24	20/20	1000	73

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

## Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-5.5		VDC
	12	10.8-13.2		
	24	21.6-26.4		
Filter	Capacitor			
Turn on Transient process time			25	ms
Start up time		200		ms
Absolute Maximum Rating	5 Vin	0-7		VDC
	12 Vin	0-15		
	24 Vin	0-28		
Peak Input Voltage time		100		ms

## Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	3 sec	1000 (all models), 3000, 4000, 5200 & 6000 (single / dual)		VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

## Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±3		%
Voltage balance (Dual Output model)	Balanced Load	±1		%
Short Circuit protection		Momentary (1 sec)		

### Output Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Line voltage regulation (Single)	For 1.0% of Vin	±1.2		%
Line voltage regulation (Dual)	For 1.0% of Vin	±1.2		%
Load voltage regulation (Single)	load 20~100%	±10		%
Load voltage regulation (Single) 3.3V output model	load 20~100%	±20		%
Load voltage regulation (Dual)	load 20~100%	±10		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20MHz Bandwidth	75		mV p-p
Rising time		50		ms

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	80		KHz
Operating temperature	Full Load without Derating	-40 to +85		°C
Storage temperature		-55 to +125		°C
Max Case temperature			+95	°C
Cooling	Free air convection			
Humidity			90	%
Case material	Non-conductive black plastic UL 94 V-0			
Weight		2.3		g
Dimensions (L x W x H)		0.76 x 0.24 x 0.37 inch	19.50 x 6.00 x 9.50 mm	
MTBF		>2 000 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

### Safety Specifications


#### Standards

Agency approvals	CE (with exception of dual separated models) EN55022 (Radiated Emissions) class B
Safety	EN55024 (Noise Immunity)
	IEC61000-4-2(ESD)
	IEC61000-4-3(Radiated immunity)

### Pin Out Specifications

Pin	Single 1000 VDC	Dual 1000 VDC	Dual Separated 1000 VDC	Single 3000, 4000, 5200 & 6000 VDC	Dual 3000, 4000, 5200 & 6000 VDC
1	+ V Input	+ V Input	+V Input	+ V Input	+ V Input
2	- V Input	- V Input	-V Input	- V Input	- V Input
4	- V Output	- V Output	+V1 Output	No pin	No pin
5	No pin	Common	-V1 Output	- V Output	- V Output
6	+ V Output	+ V Output	+V2 Output	No pin	Common
7	No pin	No pin	-V2 Output	+ V Output	+ V Output

**Dimensions:**

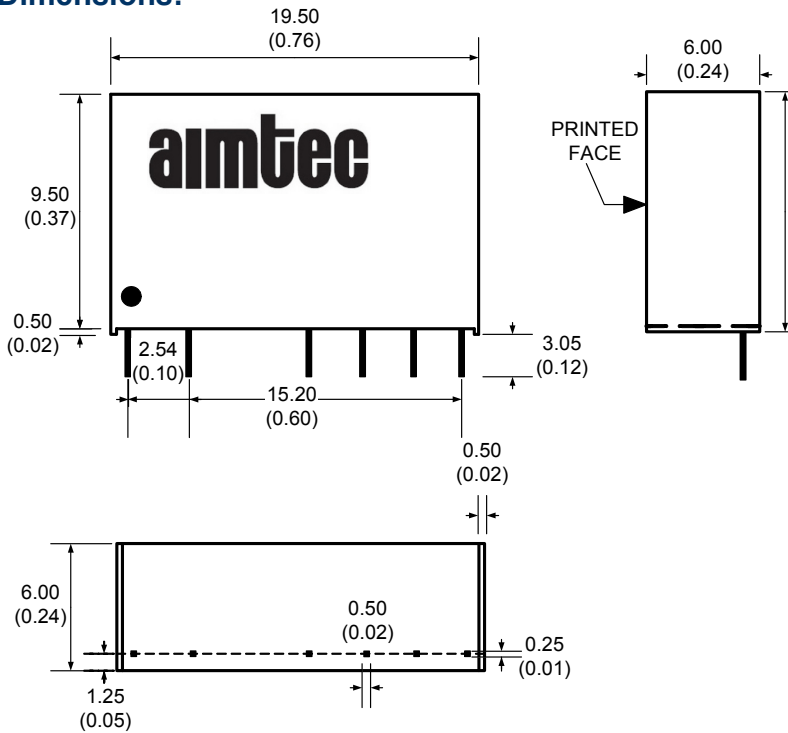

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).