

SN75LP1185 LOW-POWER MULTIPLE RS-232 DRIVERS AND RECEIVERS

SLLS335A – JANUARY 1999 – REVISED JANUARY 2001

AVAILABLE OPTIONS

| T _A | PACKAGED DEVICES | | |
|----------------|-----------------------------------|----------------------------|-----------------|
| | PLASTIC SHRINK SMALL-OUTLINE (DB) | PLASTIC SMALL OUTLINE (DW) | PLASTIC DIP (N) |
| 0°C to 70°C | SN75LP1185DBR | SN75LP1185DW | SN75LP1185N |

The DB package is only available taped and reeled. The DW package also is available taped and reeled. Add the suffix R to device type (e.g., SN75LP1185DWR).

Function Tables


DRIVER

| INPUT DA | OUTPUT DY |
|----------|-----------|
| H | L |
| L | H |
| Open | L |

RECEIVER

| INPUT RA | OUTPUT RY |
|----------|-----------|
| H | L |
| L | H |
| Open | H |

logic diagram (positive logic)

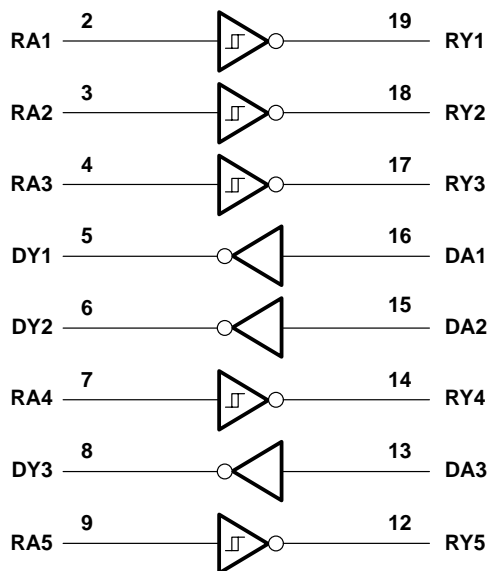

SN75LP1185

LOW-POWER MULTIPLE RS-232 DRIVERS AND RECEIVERS

SLLS335A – JANUARY 1999 – REVISED JANUARY 2001

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|---|----------------------------|
| Positive supply-voltage range (see Note 1): V_{CC} | –0.5 V to 7 V |
| V_{DD} | –0.5 V to 15 V |
| Negative supply-voltage range, V_{SS} (see Note 1) | 0.5 V to –15 V |
| Input-voltage range, V_I : Receiver (RA) | –30 V to 30 V |
| Driver (DA) | –0.5 V to $V_{CC} + 0.4$ V |
| Output-voltage range, V_O : Receiver (RY) | –0.5 V to 6 V |
| Driver (DY) | –15 V to 15 V |
| Electrostatic discharge: Bus pins (human-body model) (see Note 2) | Class 3: 15 kV |
| Bus pins (machine model) | 500 V |
| All pins (human-body model) (see Note 2) | Class 3: 5 kV |
| All pins (machine model) | 400 V |
| Package thermal impedance, θ_{JA} (see Note 3): DB package | 70°C/W |
| DW package | 58°C/W |
| N package | 69°C/W |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |
| Storage temperature range, T_{stg} | 65°C to 150°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values are with respect to network ground terminal, unless otherwise noted.
 2. Per MIL-STD-883, Method 3015.7
 3. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|----------|--------------------------------|------|-----|------|------|
| V_{CC} | Supply voltage (see Note 4) | 4.75 | 5 | 5.25 | V |
| V_{DD} | Supply voltage (see Note 5) | 9 | 12 | 15 | V |
| V_{SS} | Supply voltage (see Note 5) | –9 | –12 | –15 | V |
| V_{IH} | High-level input voltage | | 2 | | V |
| V_{IL} | Low-level input voltage | | | 0.8 | V |
| V_I | Receiver input voltage | | –25 | 25 | V |
| I_{OH} | High-level output current | | | –1 | mA |
| I_{OL} | Low-level output current | | | 2 | mA |
| T_A | Operating free-air temperature | | 0 | 70 | °C |

- NOTES: 4. V_{CC} cannot be greater than V_{DD} .
 5. The device operates down to $V_{DD} = V_{CC}$ and $|V_{SS}| = V_{CC}$, but supply currents increase and other parameters may vary slightly from the data sheet limits.



SN75LP1185

LOW-POWER MULTIPLE RS-232 DRIVERS AND RECEIVERS

SLLS335A – JANUARY 1999 – REVISED JANUARY 2001

supply currents over the recommended operating conditions (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|---|--|-----|------|---------------|
| Supply current for V_{CC} , I_{CC} | $V_{DD} = 9\text{ V}$, $V_{SS} = -9\text{ V}$ | | | 1000 | μA |
| | $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$ | | | 1000 | |
| Supply current for V_{DD} , I_{DD} | No load, All inputs at minimum V_{OH} or maximum V_{OL} | $V_{DD} = 9\text{ V}$, $V_{SS} = -9\text{ V}$ | | 800 | |
| | | $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$ | | 800 | |
| Supply current for V_{SS} , I_{SS} | | $V_{DD} = 9\text{ V}$, $V_{SS} = -9\text{ V}$ | | -625 | |
| | | $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$ | | -625 | |

driver electrical characteristics over the recommended operating conditions (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---|---|---|-----|------|---------------|---|
| V_{OH} High-level output voltage | $V_{IL} = 0.8\text{ V}$, $R_L = 3\text{ k}\Omega$, See Figure 1 | $V_{DD} = 9\text{ V}$, $V_{SS} = -9\text{ V}$ | 5 | 5.8 | 6.6 | V |
| | | $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$, See Note 6 | 5 | 5.8 | 6.6 | |
| V_{OL} Low-level output voltage | $V_{IH} = 2\text{ V}$, $R_L = 3\text{ k}\Omega$, See Figure 1 | $V_{DD} = 9\text{ V}$, $V_{SS} = -9\text{ V}$ | -5 | -5.8 | -6.9 | V |
| | | $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$, See Note 6 | -5 | -5.9 | -6.9 | |
| I_{IH} High-level input current | V_I at V_{CC} | | | 1 | μA | |
| I_{IL} Low-level input current | V_I at GND | | | -1 | μA | |
| $I_{OS(H)}$ Short-circuit high-level output current | $V_O = \text{GND}$ or V_{SS} . See Figure 2 and Note 7 | | -30 | -55 | mA | |
| $I_{OS(L)}$ Short-circuit low-level output current | $V_O = \text{GND}$ or V_{DD} . See Figure 2 and Note 7 | | 30 | 55 | mA | |
| r_o Output resistance | $V_{DD} = V_{SS} = V_{CC} = 0$, $V_O = 2\text{ V}$ | 300 | | | Ω | |

NOTES: 6. Maximum output swing is clamped nominally at $\pm 6\text{ V}$ to enable the higher data rates associated with this device and to reduce EMI emissions. The driver outputs may slightly exceed the maximum output voltage over the full V_{CC} and temperature ranges.
7. Not more than one output should be shorted at one time.



SN75LP1185

LOW-POWER MULTIPLE RS-232 DRIVERS AND RECEIVERS

SLLS335A – JANUARY 1999 – REVISED JANUARY 2001

driver switching characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|-----------|---|---|---|-----|------|------|----|------------|
| t_{PHL} | Propagation delay time, high- to low-level output | $R_L = 3\text{ k}\Omega$ to $7\text{ k}\Omega$, $C_L = 15\text{ pF}$, See Figure 1 | 300 | 800 | 1600 | ns | | |
| t_{PLH} | Propagation delay time, low- to high-level output | $R_L = 3\text{ k}\Omega$ to $7\text{ k}\Omega$, $C_L = 15\text{ pF}$, See Figure 1 | 300 | 800 | 1600 | ns | | |
| t_{TLH} | Transition time, low- to high-level output | $V_{CC} = 5\text{ V}$, $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$, $R_L = 3\text{ k}\Omega$ to $7\text{ k}\Omega$, See Figure 1 and Note 9 | Using $V_{TR} = 10\%$ -to- 90% transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$, See Note 8 | | 375 | 2240 | ns | |
| | | | Using $V_{TR} = \pm 3\text{ V}$ transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$ | | 200 | 1500 | | |
| | | | Using $V_{TR} = \pm 2\text{ V}$ transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$ | | 133 | 1000 | | |
| | | | Using $V_{TR} = \pm 3\text{ V}$ transition region, Driver speed = 125 kbit/s, $C_L = 2500\text{ pF}$ | | | 2750 | | |
| t_{THL} | Transition time, high- to low-level output | $V_{CC} = 5\text{ V}$, $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$, $R_L = 3\text{ k}\Omega$ to $7\text{ k}\Omega$, See Figure 1 and Note 9 | Using $V_{TR} = 10\%$ -to- 90% transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$, See Note 8 | | 375 | 2240 | ns | |
| | | | Using $V_{TR} = \pm 3\text{ V}$ transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$ | | 200 | 1500 | | |
| | | | Using $V_{TR} = \pm 2\text{ V}$ transition region, Driver speed = 250 kbit/s, $C_L = 15\text{ pF}$ | | 133 | 1000 | | |
| | | | Using $V_{TR} = \pm 3\text{ V}$ transition region, Driver speed = 125 kbit/s, $C_L = 2500\text{ pF}$ | | | 2750 | | |
| SR | Output slew rate | $V_{CC} = 5\text{ V}$, $V_{DD} = 12\text{ V}$, $V_{SS} = -12\text{ V}$ | Using $V_{TR} = \pm 3\text{ V}$ transition region, Driver speed = 0 to 250 kbit/s, $C_L = 15\text{ pF}$ | | 4 | 20 | 30 | V/ μ s |

NOTES: 8. Equivalent to the SN75C185. The SN75LP1185 output-voltage swing is clamped to about 70% of the typical SN75C185 output-voltage swing, and the specified limits reflect the reduced output swing.

9. Maximum output swing is limited to $\pm 6\text{ V}$ to enable the higher data rates associated with this device and to reduce EMI emissions.

receiver electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------|---|---|-------|------|------|------------|
| V_{IT+} | Positive-going input threshold voltage | See Figure 3 | 1.6 | 2 | 2.55 | V |
| V_{IT-} | Negative-going input threshold voltage | See Figure 3 | 0.6 | 1 | 1.45 | V |
| V_{HYS} | Input hysteresis, $V_{IT+} - V_{IT-}$ | See Figure 3 | 600 | 1000 | | mV |
| V_{OH} | High-level output voltage | $I_{OH} = -1\text{ mA}$ | 2.5 | 3.9 | | V |
| V_{OL} | Low-level output voltage | $I_{OL} = 2\text{ mA}$ | | 0.33 | 0.5 | V |
| I_{IH} | High-level input current | $V_I = 3\text{ V}$ | 0.43 | 0.6 | 1 | mA |
| | | $V_I = 25\text{ V}$ | 3.6 | 5.1 | 8.3 | |
| I_{IL} | Low-level input current | $V_I = -3\text{ V}$ | -0.43 | -0.6 | -1 | mA |
| | | $V_I = -25\text{ V}$ | -3.6 | -5.1 | -8.3 | |
| $I_{OS(H)}$ | Short-circuit high-level output current | $V_O = 0$, See Figure 5 and Note 7 | | | -20 | mA |
| $I_{OS(L)}$ | Short-circuit low-level output current | $V_O = V_{CC}$, See Figure 5 and Note 7 | | | 20 | mA |
| R_{IN} | Input resistance | $V_I = \pm 3\text{ V}$ to $\pm 25\text{ V}$ | 3 | 5 | 7 | k Ω |

NOTE 7: Not more than one output should be shorted at one time.




SN75LP1185 LOW-POWER MULTIPLE RS-232 DRIVERS AND RECEIVERS

SLLS335A – JANUARY 1999 – REVISED JANUARY 2001

receiver switching characteristics over recommended operating free-air temperature range, $C_L = 50$ pF (unless otherwise noted) (see Figure 4)

| PARAMETER | | MIN | TYP | MAX | UNIT |
|-------------|---|-----|-----|-----|------|
| t_{PHL} | Propagation delay time, high- to low-level output | | 400 | 900 | ns |
| t_{PLH} | Propagation delay time, low- to high-level output | | 400 | 900 | ns |
| t_{TLH} | Transition time, low- to high-level output | | 200 | 500 | ns |
| t_{THL} | Transition time, high- to low-level output | | 200 | 400 | ns |
| $t_{SK(p)}$ | Pulse skew $ t_{PLH} - t_{PHL} $ | | 200 | 425 | ns |

PARAMETER MEASUREMENT INFORMATION

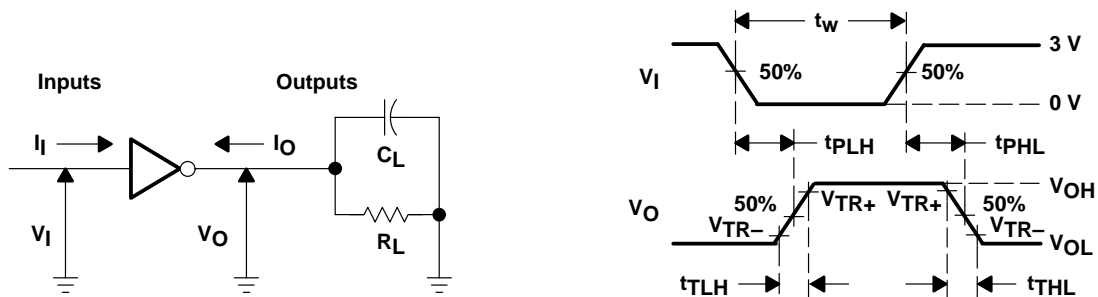

- NOTES: A. The pulse generator has the following characteristics:
 For $C_L < 1000$ pF: $t_w = 4$ μ s, PRR = 250 kbit/s, $Z_O = 50$ Ω , t_r and $t_f < 50$ ns.
 For $C_L = 2500$ pF: $t_w = 8$ μ s, PRR = 125 kbit/s, $Z_O = 50$ Ω , t_r and $t_f < 50$ ns.
 B. C_L includes probe and jig capacitance.

Figure 1. Driver Parameter Test Circuit and Waveform

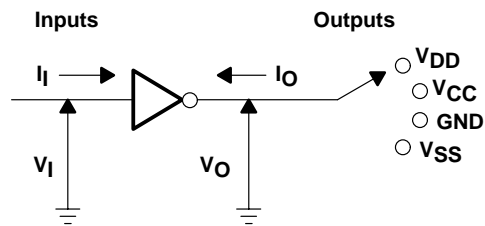


Figure 2. Driver I_{OS} Test


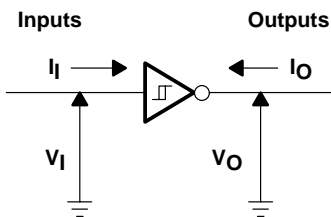


Figure 3. Receiver V_{IT} Test

PARAMETER MEASUREMENT INFORMATION

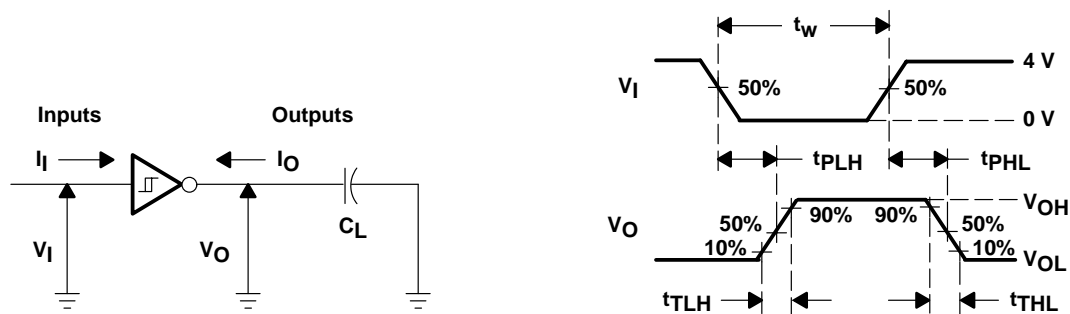

NOTES: A. The pulse generator has the following characteristics: $t_w = 4 \mu s$, PRR = 250 kbit/s, $Z_O = 50 \Omega$, t_r and $t_f < 50 ns$.
 B. C_L includes probe and jig capacitance.

Figure 4. Receiver Parameter Test Circuit and Waveform

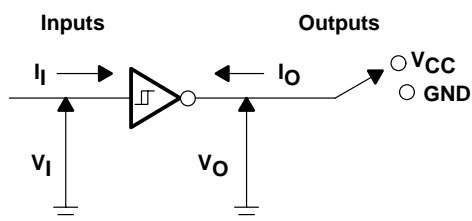


Figure 5. Receiver I_{OS} Test

APPLICATION INFORMATION

Diodes placed in series with the V_{DD} and V_{SS} leads protect the SN75LP1185 in the fault condition when the device outputs are shorted to $\pm 15 V$ and the power supplies are at low voltage and provide low-impedance paths to ground (see Figure 6).

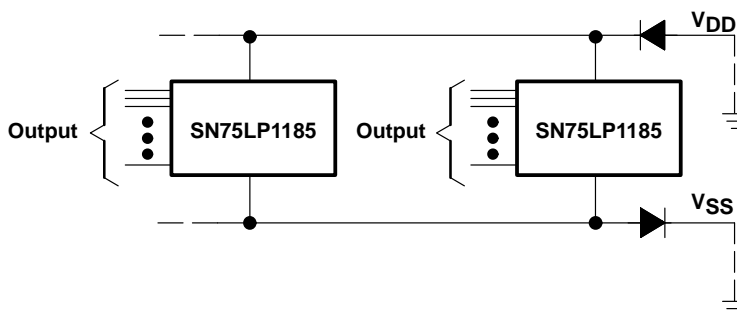


Figure 6. Power-Supply Protection to Meet Power-Off Fault Conditions of TIA/EIA-232-F

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN75LP1185DBR | ACTIVE | SSOP | DB | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DBRE4 | ACTIVE | SSOP | DB | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DBRG4 | ACTIVE | SSOP | DB | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DW | ACTIVE | SOIC | DW | 20 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DWE4 | ACTIVE | SOIC | DW | 20 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DWG4 | ACTIVE | SOIC | DW | 20 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DWR | ACTIVE | SOIC | DW | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DWRE4 | ACTIVE | SOIC | DW | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185DWRG4 | ACTIVE | SOIC | DW | 20 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |
| SN75LP1185N | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | CU NIPDAU | N / A for Pkg Type |
| SN75LP1185NE4 | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | CU NIPDAU | N / A for Pkg Type |
| SN75LP1185PWR | OBSOLETE | TSSOP | PW | 20 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN75LP1185DBR | SSOP | DB | 20 | 2000 | 330.0 | 16.4 | 8.2 | 7.5 | 2.5 | 12.0 | 16.0 | Q1 |
| SN75LP1185DWR | SOIC | DW | 20 | 2000 | 330.0 | 24.4 | 10.8 | 13.0 | 2.7 | 12.0 | 24.0 | Q1 |
| SN75LP1185PWR | TSSOP | PW | 20 | 0 | 330.0 | 16.4 | 6.95 | 7.1 | 1.6 | 8.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN75LP1185DBR | SSOP | DB | 20 | 2000 | 346.0 | 346.0 | 33.0 |
| SN75LP1185DWR | SOIC | DW | 20 | 2000 | 346.0 | 346.0 | 41.0 |
| SN75LP1185PWR | TSSOP | PW | 20 | 0 | 346.0 | 346.0 | 33.0 |

PW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN



4040064/F 01/97

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

DW (R-PDSO-G20)

PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
 - D. Falls within JEDEC MS-013 variation AC.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
 - The 20 pin end lead shoulder width is a vendor option, either half or full width.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated